

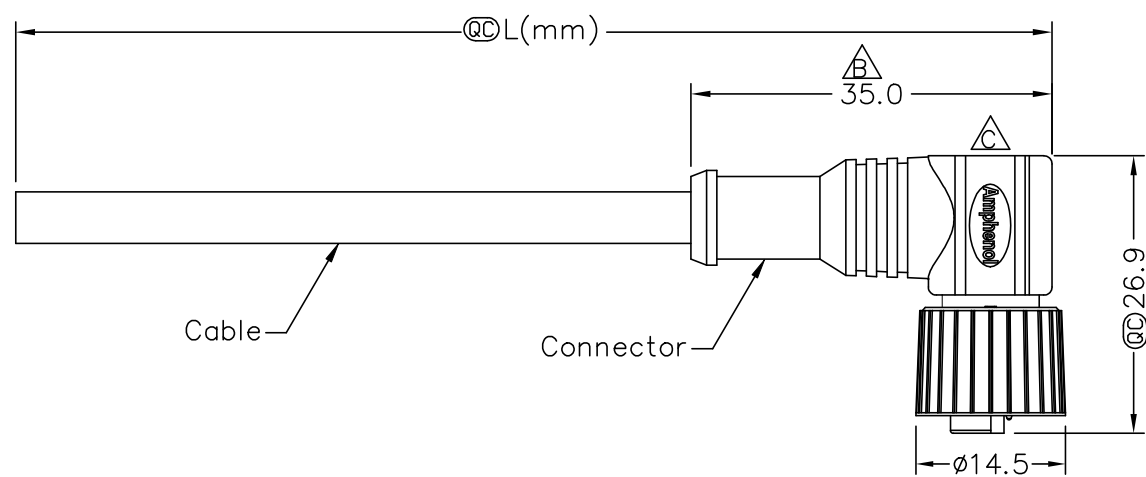


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201441	2020/09/17	Vicky	$\triangle C$ X2
D	C210219	2021/03/17	Vicky	$\triangle D$ X4
E	C210796	2021/05/24	Vicky	$\triangle E$ X1



Pin Out	5	Green	綠
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
Pin #		Wire	
Conn.			
	5P		
Pin Assignments Front View			

$\triangle D$ 12-XXBFIM-SR8BXX
 XX: No. Of Pin
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

$\triangle D$ Note:
 * RoHS Compliant
 * @C Important dimension
 * Waterproof rate: IPX8, mated 1m/24h
 * Connector
 $\triangle C$ Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Green
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * Cable: 22#*5C+Insulation, OD=5.0mm, PU Jacket, Black
 $\triangle B$ * Cable length tolerance:
 1M: +50/-0 mm
 1M < L ≤ 3M: +100/-0 mm
 3M < L ≤ 5M: +150/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 $\triangle E$ 30M < L ≤ 99M: ±500 mm

A	UNIT:mm		TITLE			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO		DRAWN BY		DATE				
	TOLERANCE ±0.5 mm		O SEN, M12 A (I)				DWG. NO	Prune		2009/01/14					
			CABLE W/O SR, F, I, MOLDING				12-XXBFIM-SR8BXX	CHECKED BY		DATE					
			SCALE Free SHEET 1 OF 1					Tina		2009/01/16					
REV. E		SIZE A4	@@ :Inspection Item			CUSTOMER		APPROVED BY		DATE					
						ALTW		Luke		2009/03/26					
1		2		3		4		5		6		7		8 W0814-03-表單01A2	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.