
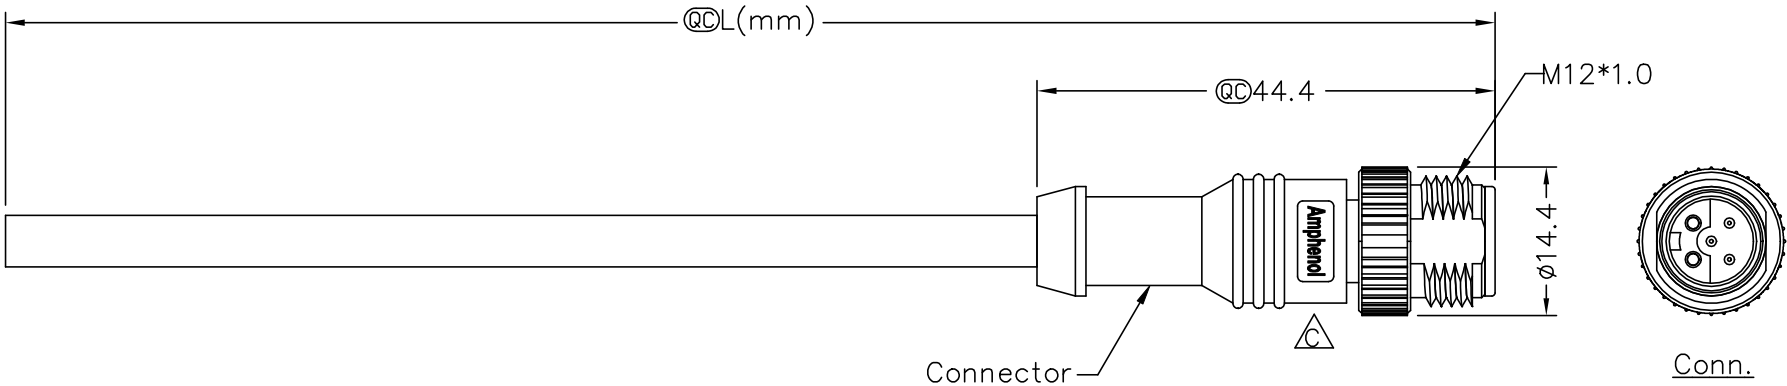


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1660272~275	2016/06/01	Vicky	Update Logo
D	C210219	2021/03/17	Vicky	△X4
E	C210796	2021/05/24	Vicky	△X1



Pin Out	5	Green	綠
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	
Conn.			
	5P		
	Pin Assignments Front View		

△12-XXBMIM-SL8AXX
XX: No. Of Pin
XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters

- △ Note:
- * RoHS Compliant
 - * @@ Important dimension
 - * Waterproof rate: IPX8, mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2464, 22#*5C+Talcum, OD=5.5mm, PVC Jacket, UV Resistant, Black
- △* Cable length tolerance:
- 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - △ 30M < L ≤ 99M: ±500 mm

UNIT:mm			TITLE	
	TOLERANCE		O SEN, M12 A (I) △△	
	±0.5mm		CABLE W/O SR, M, I, MOLDING	
			SCALE Free SHEET 1 OF 1	
REV. E		SIZE A4		QC: Inspection Item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
		DWG. NO	CHECKED BY	DATE
		CUSTOMER	APPROVED BY	DATE
		12-XXBMIM-SL8AXX	Vicky	2016/06/01
		ALTW	Rita	2016/06/01
			Lisa	2016/06/01

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.