| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| C | LEN1660276~279 | 2016/06/01 | Vicky | Update Logo |
| D | C210219 | 2021/03/17 | Vicky | △D X4 |
| E | C210796 | 2021/05/24 | Vicky | △E X1 |

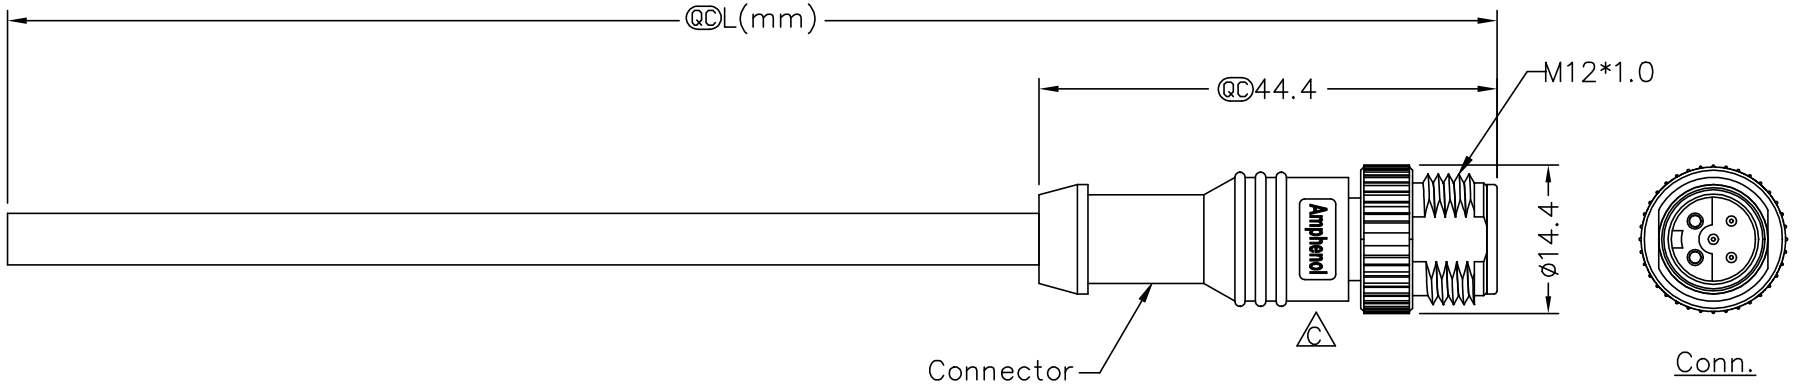


| Pin Out | Pin # | Wire | |
|---|---|---|---|
| | 5 | Green | 綠 |
| | 4 | Black | 黑 |
| | 3 | Blue | 藍 |
| | 2 | White | 白 |
| | 1 | Brown | 棕 |

Conn. △B




5P

Pin Assignments
Front View

△D 12-XXBMIM-SL8BXX

XX: No. Of Pin

XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters

△D Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Nut: Metal
  Outer mold: Thermoplastic, Black
* Cable: 22#*5C+Insulation, OD=5.0mm, PU Jacket, Black
△B * Cable length tolerance:
  1M: +50/−0 mm
  1M < L ≦ 3M: +100/−0 mm
  3M < L ≦ 5M: +150/−0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 20M: ±200 mm
  20M < L ≦ 30M: ±300 mm
  △E 30M < L ≦ 99M: ±500 mm

| | | | |
|---|---|---|---|
| UNIT: mm | TITLE: O SEN, M12 A (I) △B △D CABLE W/O SR, M, I, MOLDING | ITEM NO | DRAWN BY: Vicky — DATE: 2016/06/01 |
| TOLERANCE: ±0.5mm | SCALE: Free — SHEET 1 OF 1 | DWG NO: △D 12-XXBMIM-SL8BXX | CHECKED BY: Rita — DATE: 2016/06/01 |
| | REV. E — SIZE A4 — QC: Inspection Item | CUSTOMER: ALTW | APPROVED BY: Lisa — DATE: 2016/06/01 |

**Amphenol LTW**
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.