


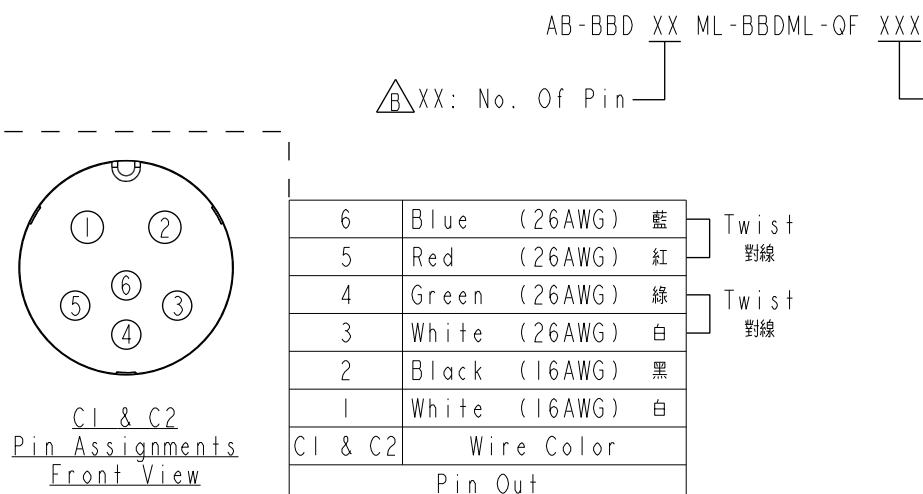

Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Outer Mold: Thermoplastic, Black
- * Cable: UL21996, 16#*2C+AL/MY+(26#*2P+AL/MY), PVC Jacket, Black, OD9.3mm
- * Cable length tolerance:

0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT:mm		TITLE ACC, XLOK, B-10A+5A, DB-ENDED MM			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Vicky	DATE 2020-01-20
TOLERANCE ±0.5mm		SCALE 1:2	SIZE A4	SHEET 1 OF 1		DWG NO AB-BBDXXML-BBDML-QFXXX	CHECKED BY Rita	DATE 2020-01-20
		REV. C	WC-REV. A.5	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-20