
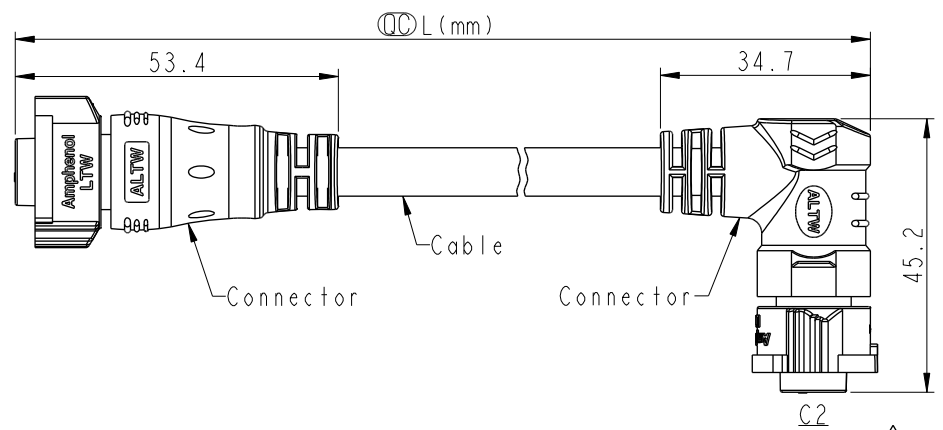



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220471	2022/03/25	Vicky	$\triangle B$ X2



AB-BD XX FL-BDFR-QE XXX
 $\triangle B$ XX: No. Of Pin
XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters

Pin Out	3 White 白 2 Green 綠 1 Black 黑
	Pin # Wire
C2	
C1	
Pin Assignments Front View	

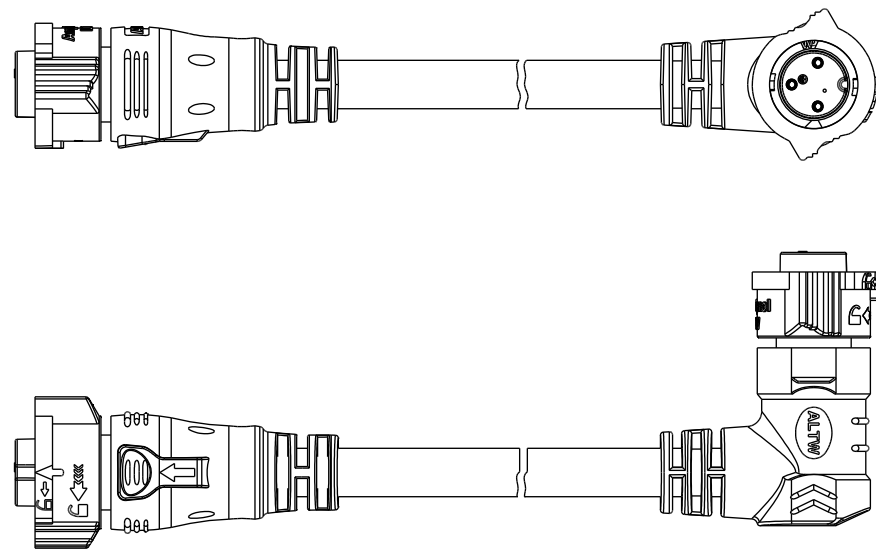

- Note:
- * RoHS Compliant
 - * $\odot$ Important dimension
 - * C1
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Dark gray
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
 - * C2
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Dark gray
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
 - * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
 - * Cable length tolerance: 0.5M < L $\leq$ 1M: +60/-0 mm
1M < L $\leq$ 3M: +120/-0 mm
3M < L $\leq$ 5M: +160/-0 mm
5M < L $\leq$ 10M: $\pm$ 100 mm
10M < L $\leq$ 20M: $\pm$ 200 mm
20M < L $\leq$ 30M: $\pm$ 300 mm
30M < L $\leq$ 99M: $\pm$ 500 mm

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		ACC, XLOK, B-5A, DB-ENDED FF		DWG NO		CHECKED BY		DATE	
± 0.5 mm		SCALE		REV.		APPROVED BY		DATE	
		1:2		B		Max		2020-01-20	
		SIZE		WC-REV.		CUSTOMER			
		A4		A.5		ALTW			
		SHEET		$\odot$ Inspection item					
		1 OF 1							

Amphenol LTW
安費諾亮泰企業股份有限公司