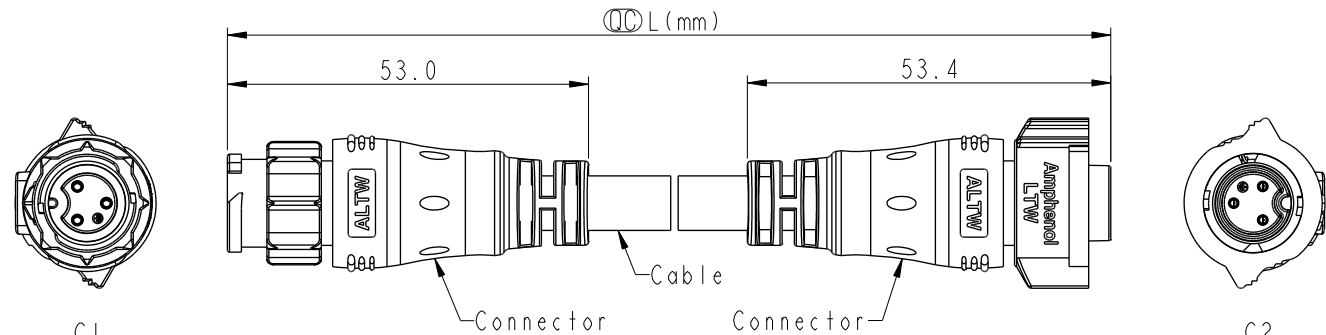




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220472	2022/03/28	Vicky	△B X2



C1

C2

Pin Out	3	White	白
	2	Green	綠
	1	Black	黑
	Pin #	Wire	
C2		3P	
C1		3P	
Pin Assignments Front View			

△B XX: No. Of Pin

AB-BD XX HL-BDBL-QE XXX

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
...
099: 99 Meters

△B Note:

- * RoHS Compliant
- * ○○ Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Outer Mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Dark gray
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
- * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
- * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT:mm		TOLERANCE		TITLE				ITEM NO		DRAWN BY		DATE	
±0.5mm				ACC, XLOK, B-5A, DB-ENDED MF				AB-BDXXHL-BDBL-QEXXX		Vicky		2020-01-20	
				SCALE 1:2				DWG NO		CHECKED BY		DATE	
				REV. B				CUSTOMER		APPROVED BY		DATE	
				WC-REV. A.5				ALTW		Max		2020-01-20	
				QC: Inspection item									

Amphenol LTW
安費諾亮泰企業股份有限公司