


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220473	2022/03/28	Vicky	$\triangle B$ X3

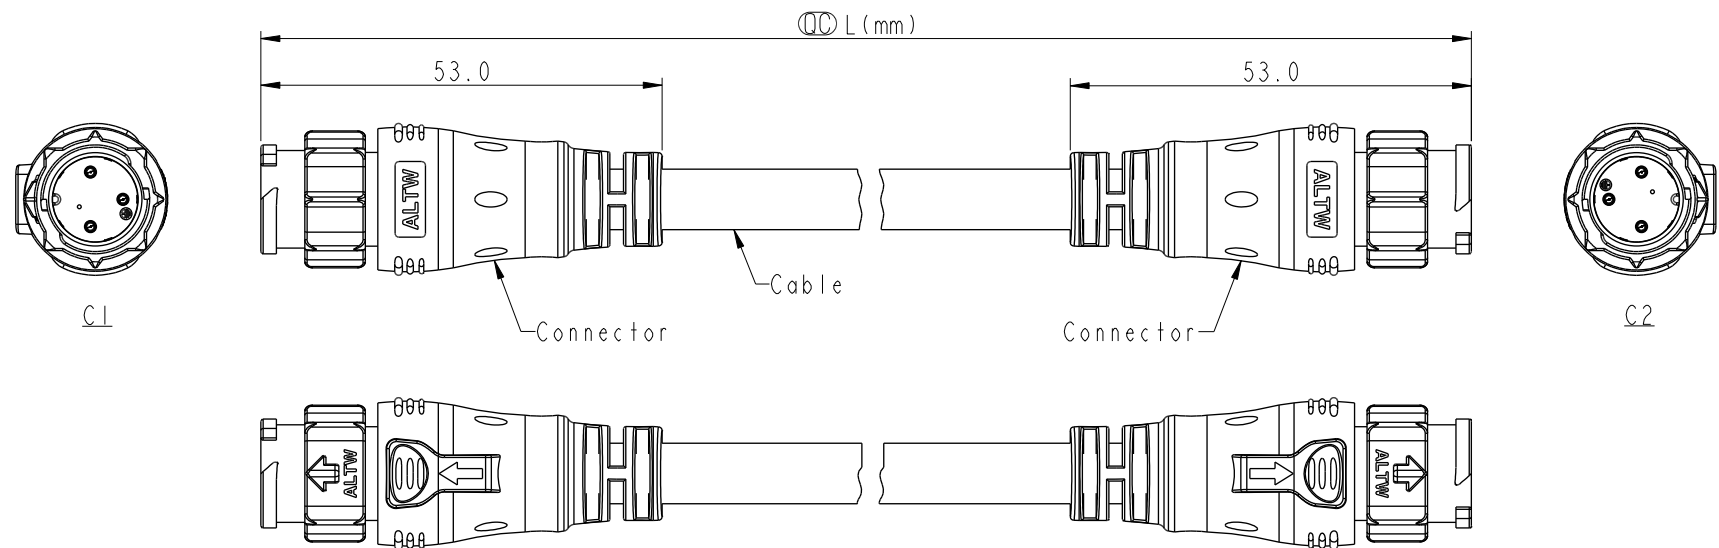

Pin Out	3 White 2 Green 1 Black	白 綠 黑
Pin #	Wire	
C1 & C2		3P

Pin Assignments Front View

$\triangle B$ XX: No. Of Pin

AB-BD XX ML-BDML-QE XXX

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters

$\triangle B$ Note:

- * RoHS Compliant
- * $\odot$ Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Outer Mold: Thermoplastic, Black
- * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
- * Cable length tolerance: $0.5M < L \leq 1M: +60/-0 \text{ mm}$
 $1M < L \leq 3M: +120/-0 \text{ mm}$
 $3M < L \leq 5M: +160/-0 \text{ mm}$
 $5M < L \leq 10M: \pm 100 \text{ mm}$
 $10M < L \leq 20M: \pm 200 \text{ mm}$
 $20M < L \leq 30M: \pm 300 \text{ mm}$
 $30M < L \leq 99M: \pm 500 \text{ mm}$

UNIT:mm		TITLE	ACC, XLOK, B-5A, DB-ENDED
TOLERANCE	$\pm 0.5 \text{ mm}$	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 1
		REV.	B
		WC-REV.	A.5
		$\odot$	Inspection item

Amphenol LTW	ITEM NO	DRAWN BY	DATE
安費諾亮泰企業股份有限公司		Vicky	2020-01-20
	DWG NO	CHECKED BY	DATE
	AB-BDXXML-BDML-QEXXX	Rita	2020-01-20
	CUSTOMER	APPROVED BY	DATE
	ALTW	Max	2020-01-20