


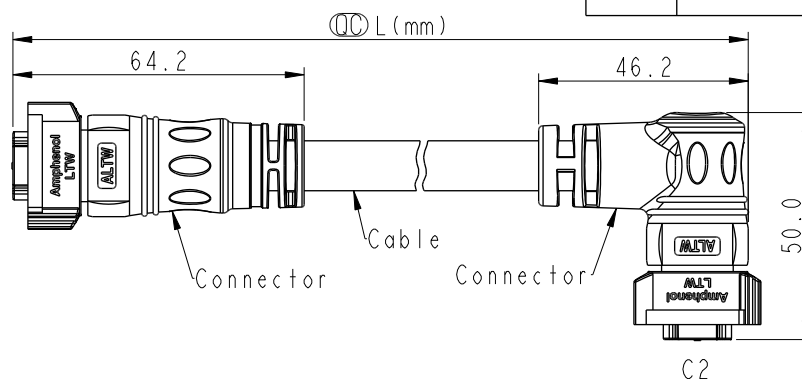


XX: No. Of Pin

AB-CBD XX FL-CBDFR-QF XXX


```

— XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
.
099: 99 Meters

```



C2
Pin Assignments
Front View



CI
Pin Assignments
Front View

8	Drain (26AWG)	地線	Twist 對線
7	Blue (26AWG)	藍	
6	Red (26AWG)	紅	Twist 對線
5	Green (26AWG)	綠	
4	White (26AWG)	白	Twist 對線
3	Black (16AWG)	黑	
2	Green (16AWG)	綠	
1	White (16AWG)	白	
Cl & C2	Wire Color		
Pin Out			

Note: $\triangle B$

- * RoHS Compliant
- *  Important dimension
- * C1
 - Waterproof rate: IPX8, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - O-Ring: Rubber, Gray
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
- * C2
 - Waterproof rate: IPX8, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - O-Ring: Rubber, Gray
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
- * Cable: UL21996, 16#*3C+(26#*2P+D+AL/MY)+AL/MY,
OD=11.0mm, PVC Jacket, Black
- * Cable length tolerance:

0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT:mm				TITLE ACC, XLOK, C-10A+5A, DB-ENDED FF		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Vicky		DATE 2020-02-03			
TOLERANCE ±0.5mm		SCALE 33:100		SIZE A4				SHEET 1 OF 1		DWG NO AB-CBDXXFL-CBDFR-QFXXX		CHECKED BY Rita		DATE 2020-02-03	
		REV. B		WC-REV. A.5				QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2020-02-03	

W10814-03-西醫01A