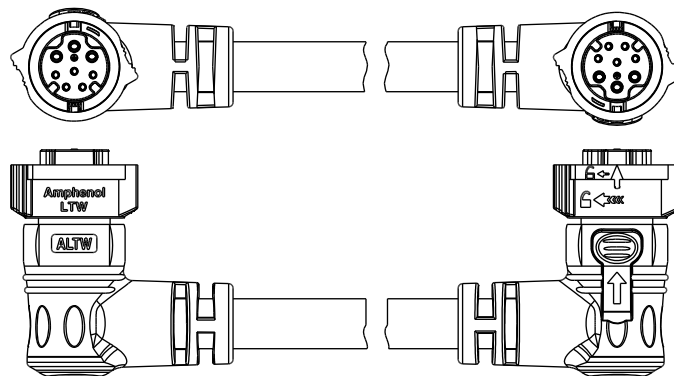
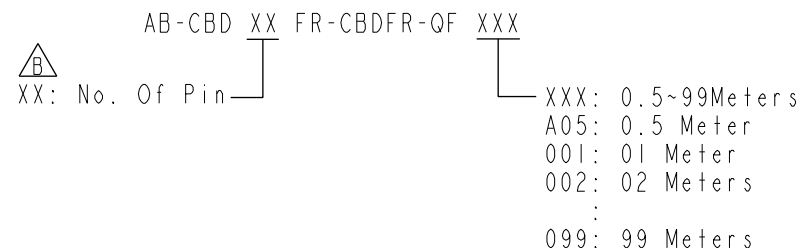


8	Drain (26AWG)	地線	Twist 對線
7	Blue (26AWG)	藍	
6	Red (26AWG)	紅	Twist 對線
5	Green (26AWG)	綠	
4	White (26AWG)	白	Twist 對線
3	Black (16AWG)	黑	
2	Green (16AWG)	綠	
1	White (16AWG)	白	
C1 & C2	Wire Color		
Pin Out			

Note: 

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - O-Ring: Rubber, Gray
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
- * Cable: UL21996, 16#*3C+(26#*2P+D+AL/MY)+AL/MY, OD=11.0mm, PVC Jacket, Black
- * Cable length tolerance: $0.5M < L \leq 1M: +60/-0 \text{ mm}$
 $1M < L \leq 3M: +120/-0 \text{ mm}$
 $3M < L \leq 5M: +160/-0 \text{ mm}$
 $5M < L \leq 10M: \pm 100 \text{ mm}$
 $10M < L \leq 20M: \pm 200 \text{ mm}$
 $20M < L \leq 30M: \pm 300 \text{ mm}$
 $30M < L \leq 99M: \pm 500 \text{ mm}$

UNIT:mm		TITLE ACC, XLOK, C-10A+5A, DB-ENDED FF			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Vicky	DATE 2020-02-03
TOLERANCE ±0.5mm		SCALE 33:100	SIZE A4	SHEET 1 OF 1		DWG NO AB-CBDXXFR-CBDFR-QFXXX	CHECKED BY Rita	DATE 2020-02-03
		REV. B	WC-REV. A.5	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-02-03