


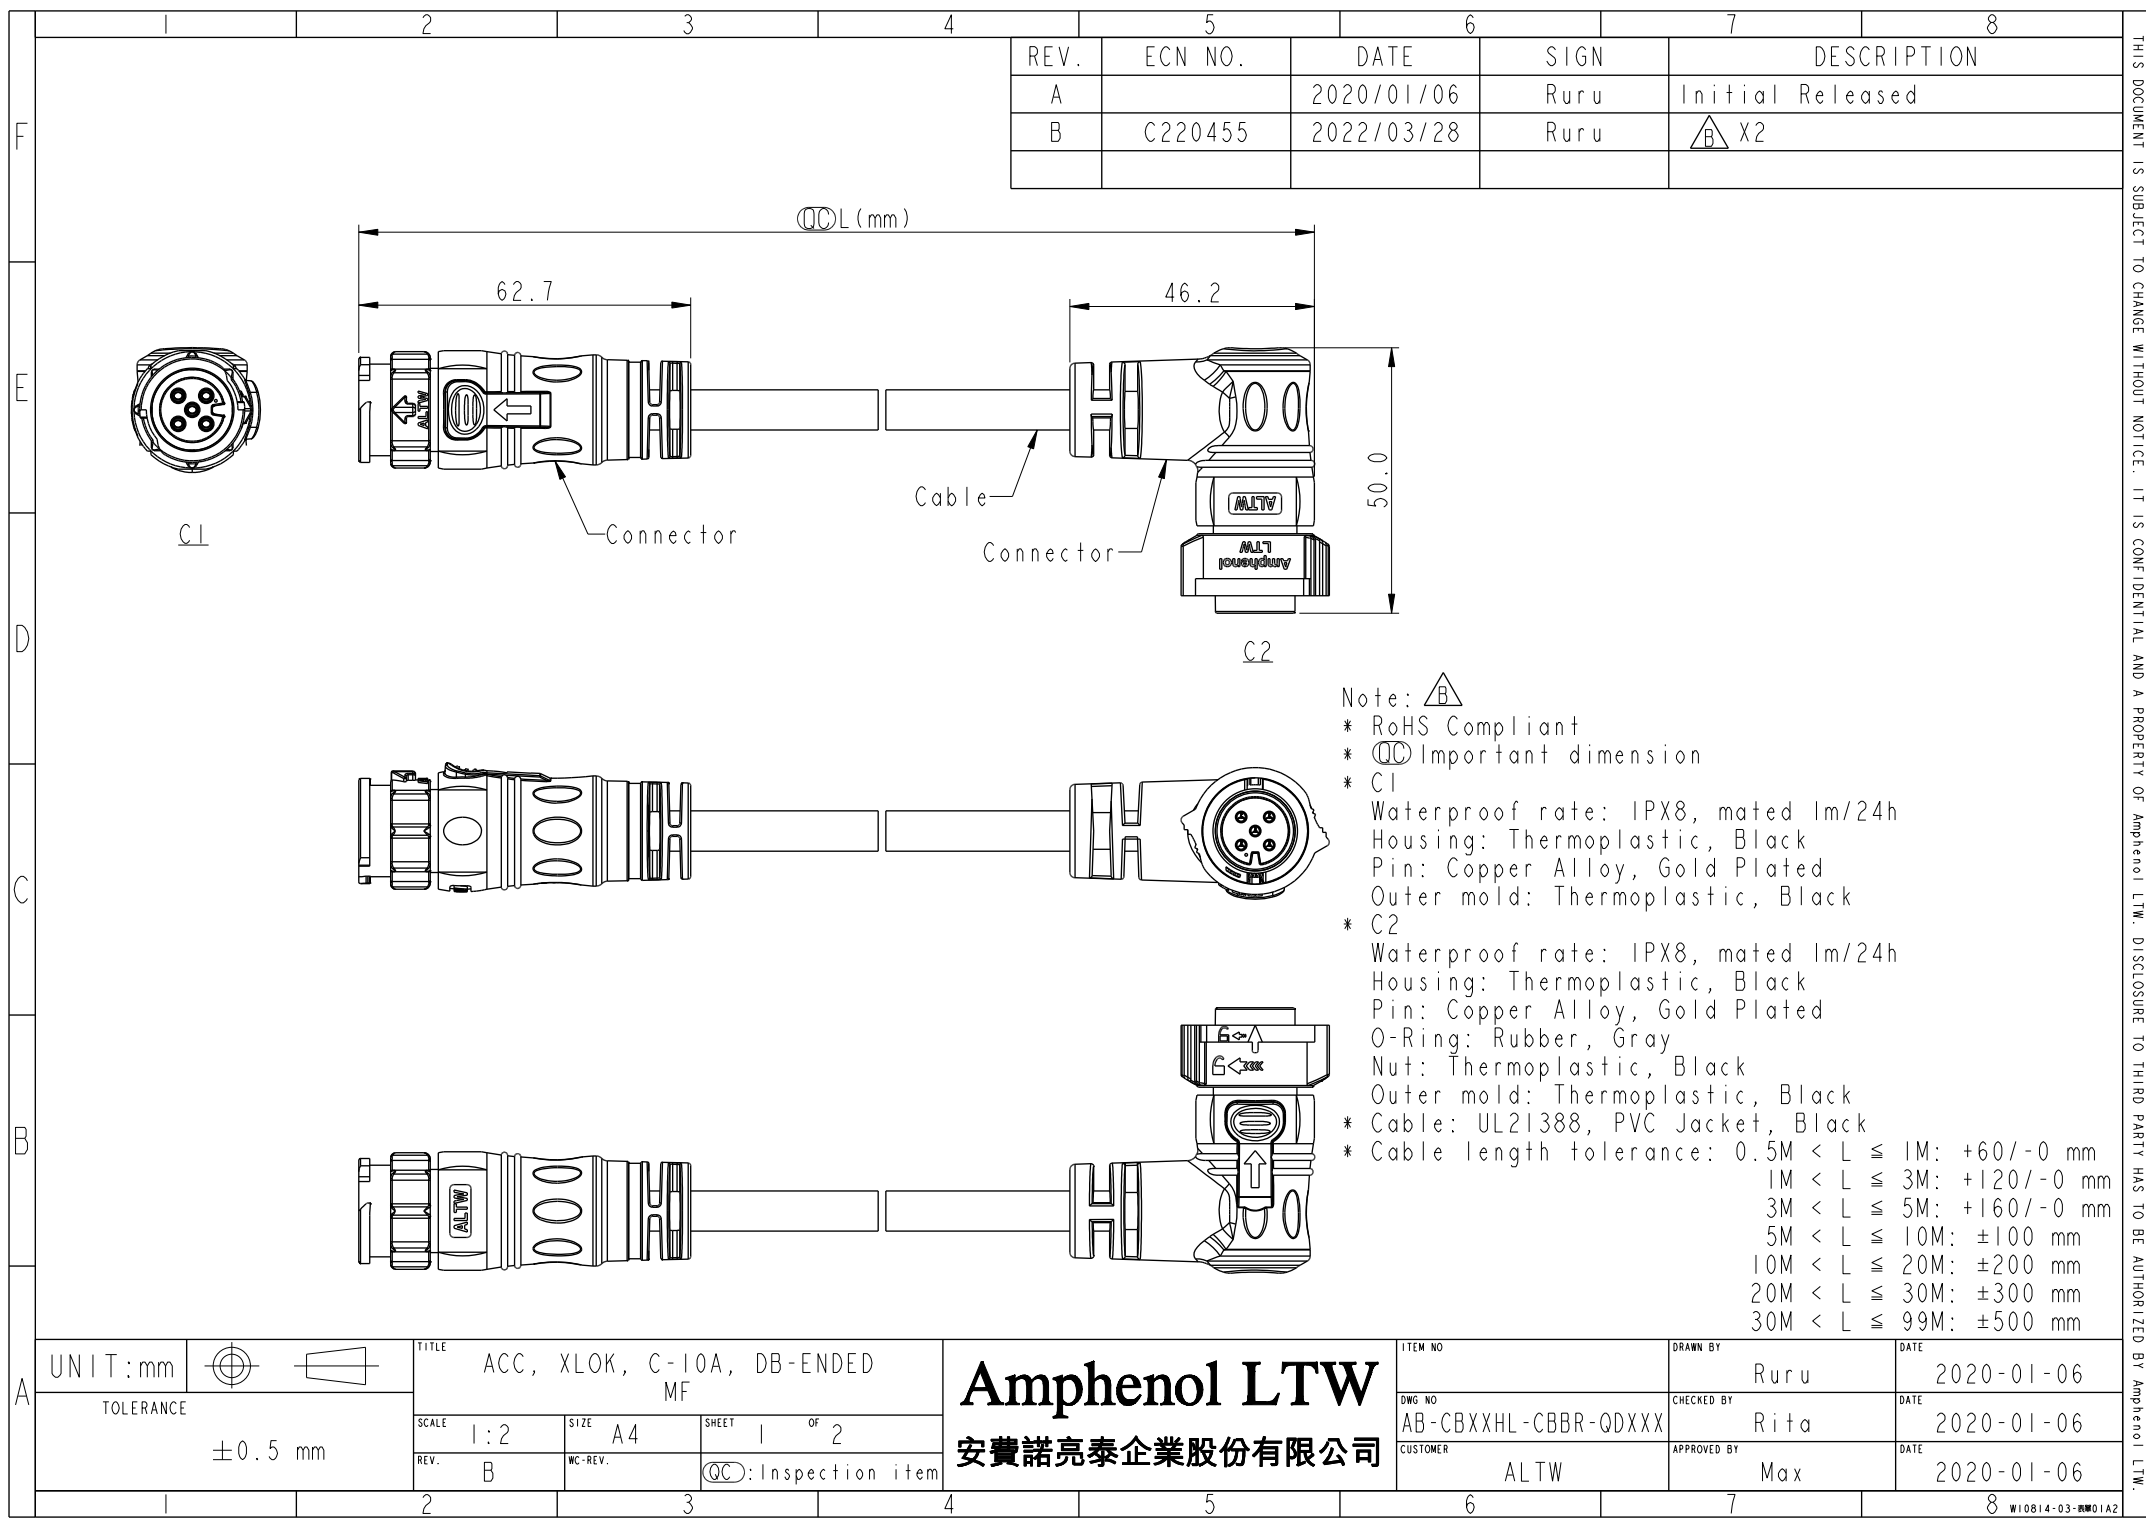

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/06	Ruru	Initial Released
B	C220455	2022/03/28	Ruru	 X2

Note: 

- * RoHS Compliant
- *  Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
Outer mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
O-Ring: Rubber, Gray
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
- * Cable: UL21388, PVC Jacket, Black
- * Cable length tolerance: $0.5M < L \leq 1M: +60/-0 \text{ mm}$
 $1M < L \leq 3M: +120/-0 \text{ mm}$
 $3M < L \leq 5M: +160/-0 \text{ mm}$
 $5M < L \leq 10M: \pm 100 \text{ mm}$
 $10M < L \leq 20M: \pm 200 \text{ mm}$
 $20M < L \leq 30M: \pm 300 \text{ mm}$
 $30M < L \leq 99M: \pm 500 \text{ mm}$

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
				ACC, XLOK, C-10A, DB-ENDED MF		AB-CBXXHL-CBBR-QDXXX		Ruru		2020-01-06	
$\pm 0.5 \text{ mm}$		SCALE		SIZE		SHEET		CHECKED BY		DATE	
		1:2		A4		1		Rita		2020-01-06	
REV.		WC-REV.		 :Inspection item		CUSTOMER		APPROVED BY		DATE	
B						ALTW		Max		2020-01-06	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

