



1		2	3	4	5	6	7	8
				REV.	ECN NO.	DATE	SIGN	DESCRIPTION
				A		2020/01/07	Ruru	Initial Released
				B	C220464	2022/04/07	Ruru	X2
F								
E								
D								
C								
B								
A								



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



C1

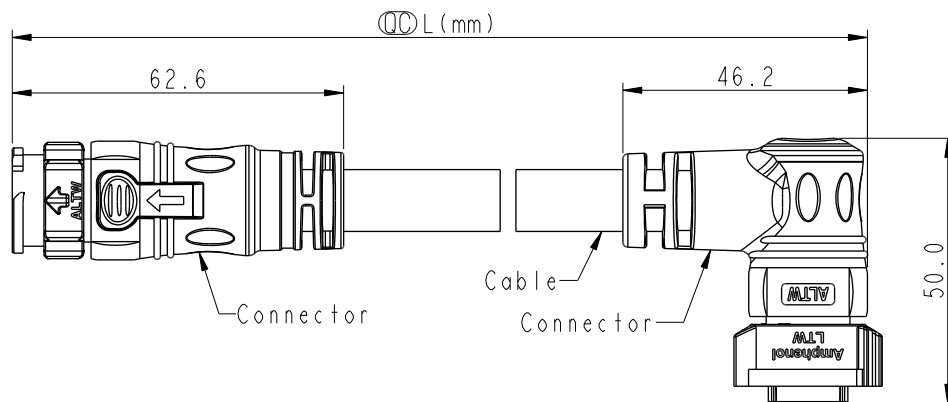

C2

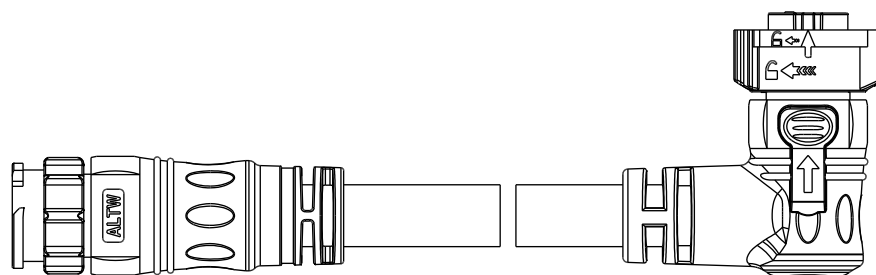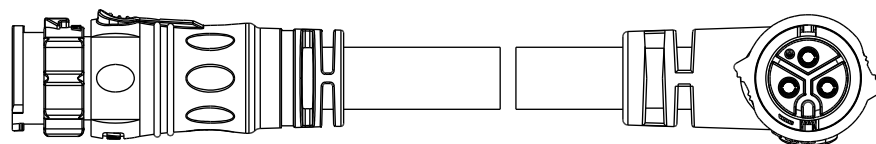

Note:

* RoHS Compliant

* Important dimension

* C1

Waterproof rate: IPX8, mated 1m/24h

Housing: Thermoplastic, Black

Pin: Copper Alloy, Gold Plated

Outer mold: Thermoplastic, Black

* C2

Waterproof rate: IPX8, mated 1m/24h

Housing: Thermoplastic, Black

Pin: Copper Alloy, Gold Plated

O-Ring: Rubber, Gray

Nut: Thermoplastic, Black

Outer mold: Thermoplastic, Black

* Cable: SJTW, PVC Jacket, Black

* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm

1M < L ≤ 3M: +120/-0 mm

3M < L ≤ 5M: +160/-0 mm

5M < L ≤ 10M: ±100 mm

10M < L ≤ 20M: ±200 mm

20M < L ≤ 30M: ±300 mm


30M < L ≤ 99M: ±500 mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE ACC, XLOK, C-20A, DB-ENDED MF		
SCALE 1:2	SIZE A4	SHEET 1 OF 2
REV. B	WC-REV.	: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2020-01-07
DWG NO AB-CCXXML-CCFR-QEXXX	CHECKED BY Rita	DATE 2020-01-07
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-07

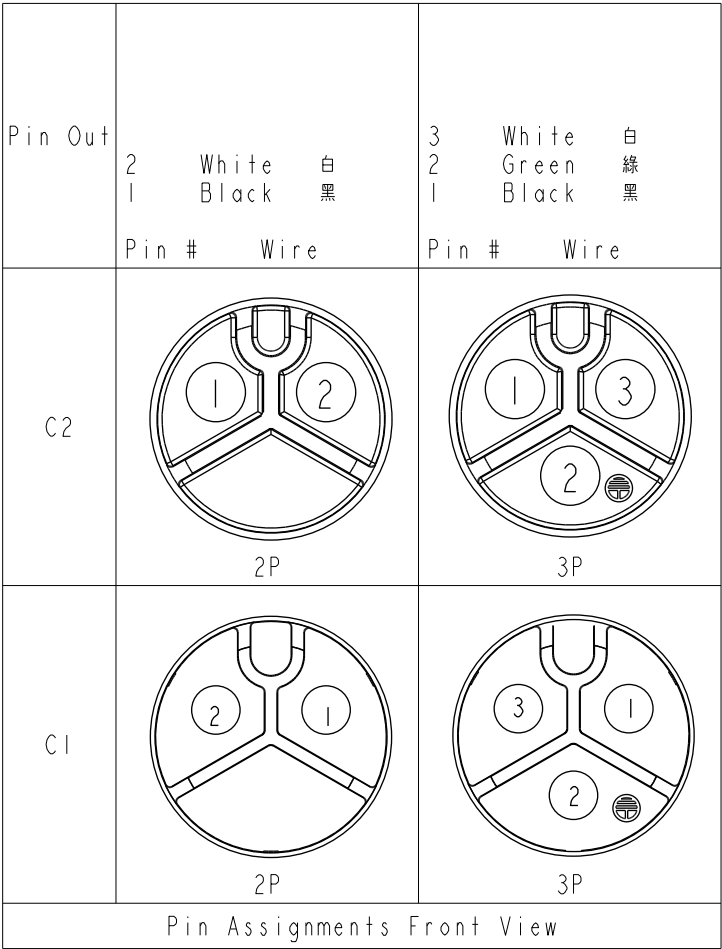

AB- CC XX M L - CC F R - Q E XXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 :
 099: 99 Meters

UNIT:mm		TITLE ACC, XLOK, C-20A, DB-ENDED MF			ITEM NO		DRAWN BY		DATE
					DWG NO		CHECKED BY		DATE
					CUSTOMER		APPROVED BY		DATE
					ALTW		Max		2020-01-07

Amphenol LTW
 安費諾亮泰企業股份有限公司