
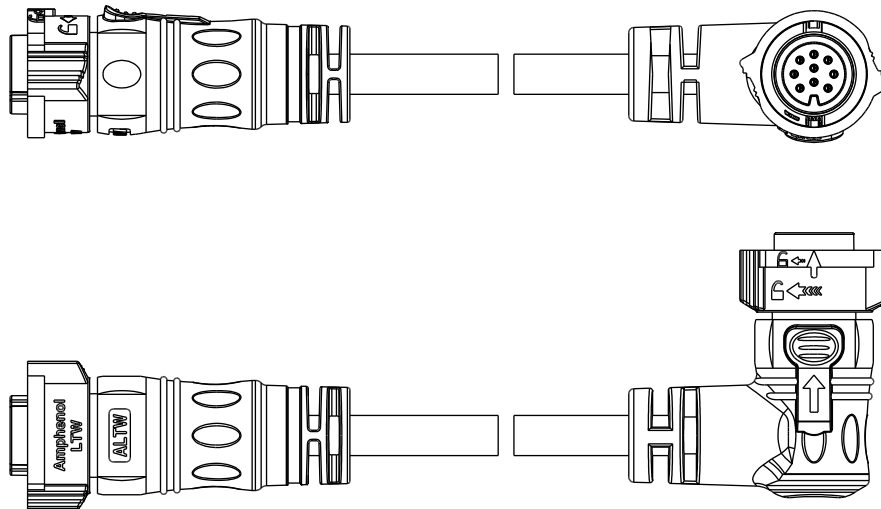


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/08	Ruru	Initial Released
B	C220462	2022/03/29	Ruru	 X2

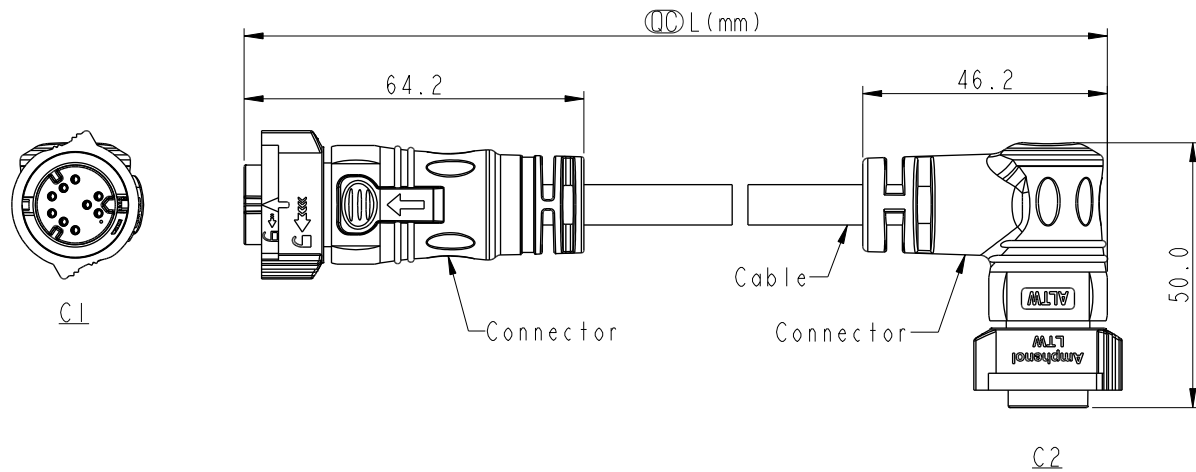

- Note: 
- * RoHS Compliant
 - *  Important dimension
 - * C1
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
O-Ring: Rubber, Gray
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
 - * C2
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
O-Ring: Rubber, Gray
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
 - * Cable: UL21388, PVC Jacket, Black
 - * Cable length tolerance: $0.5M < L \leq 1M: +60/-0 \text{ mm}$
 $1M < L \leq 3M: +120/-0 \text{ mm}$
 $3M < L \leq 5M: +160/-0 \text{ mm}$
 $5M < L \leq 10M: \pm 100 \text{ mm}$
 $10M < L \leq 20M: \pm 200 \text{ mm}$
 $20M < L \leq 30M: \pm 300 \text{ mm}$
 $30M < L \leq 99M: \pm 500 \text{ mm}$

UNIT:mm		TITLE ACC, XLOK, C-5A, DB-ENDED FF		ITEM NO		DRAWN BY Ruru		DATE 2020-01-08	
TOLERANCE $\pm 0.5 \text{ mm}$		SCALE 1:2	SIZE A4	SHEET 1	OF 2	DWG NO AB-CDXXFL-CDBR-QDXXX	CHECKED BY Rita	DATE 2020-01-08	
REV. B		WC-REV.	 : Inspection item		CUSTOMER ALTW		APPROVED BY Max	DATE 2020-01-08	

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

