
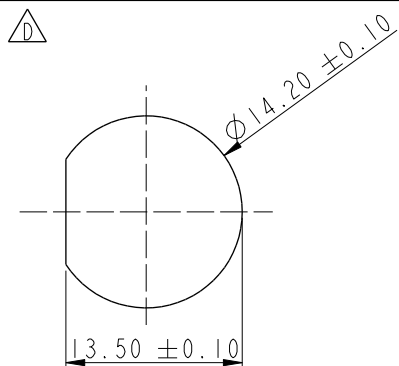


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201432	2020/09/10	Ouyang	X1
C	C220608	2022/04/19	Ruru	X6
D	C221195	2022/09/15	Allen Pan	X1




AD-XXPMMP-QC8001

XX: No. Of Pin



Recommended
Panel Cut-out

White Printing

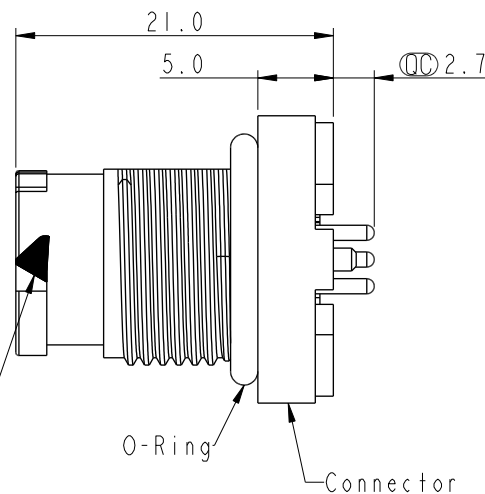

O-Ring

Connector

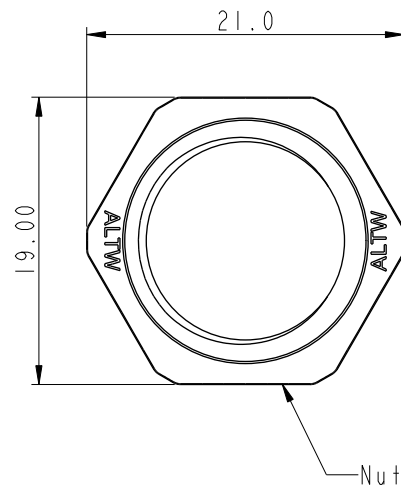

Nut



9/16" - 24 UNS

Note:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * O-Ring: Rubber, Gray
- * Use with waterproof cap or dust cap
 - Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
 - Panel thickness max: 4.0mm
- * For pcb thickness max: 2.0mm
- * Nut is packed separately in zipper bag

UNIT:mm  



TOLERANCE
± 0.25 mm

TITLE XLOK, A-5A, FRONT FASTENED M, M, PCB S, PUSH LOCK 			
SCALE 2:1	SIZE A4	SHEET 1 OF 2	
REV. D	WC-REV. A.5	 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Gill Lai	DATE 2019/05/22
DWG NO AD-XXPMMP-QC8001 	CHECKED BY Sam Ho	DATE 2019/05/22
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2019/05/22

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

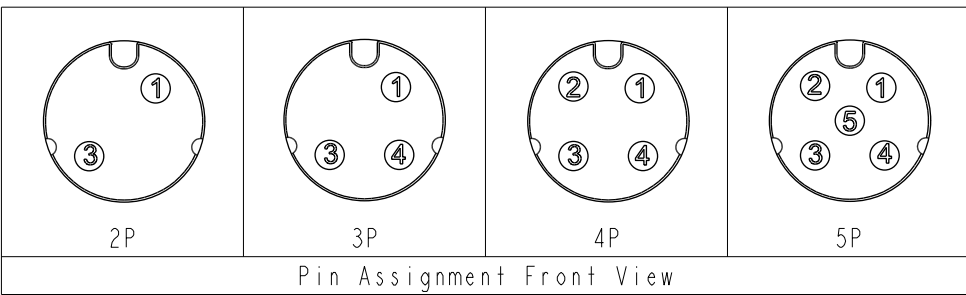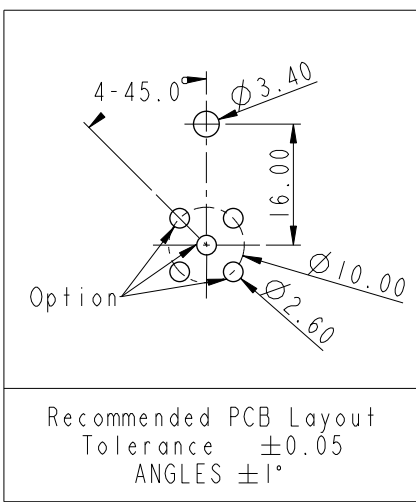

UNIT:mm			TITLE	
	TOLERANCE		XLOK, A-5A, FRONT FASTENED	
	$\pm 0.25 \text{ mm}$		M, M, PCB S, PUSH LOCK	
SCALE	2:1	SIZE	A4	SHEET 2 OF 2
REV.	D	WC-REV.	A.5	QC: Inspection item

ITEM NO		DRAWN BY		DATE	
DWG NO		CHECKED BY		DATE	
AD-XXPMMP-QC8001		Sam Ho		2019/05/22	
CUSTOMER		APPROVED BY		DATE	
ALTW		Fred Lee		2019/05/22	

Amphenol LTW
安費諾亮泰企業股份有限公司