


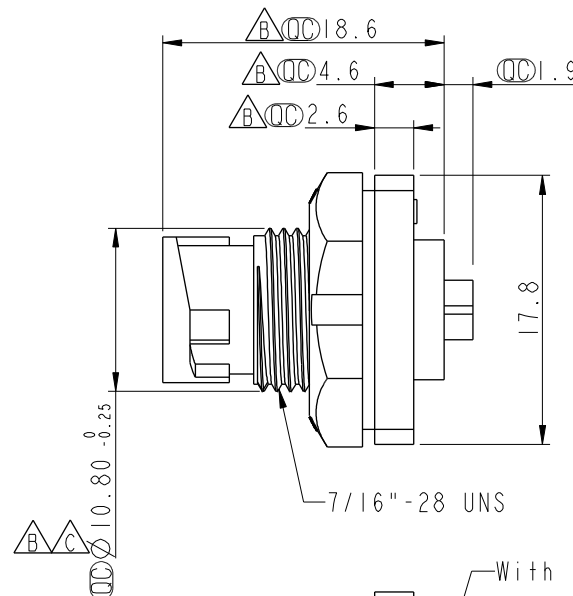



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-9C0093	2009/12/16	Vicky	REF. TO ECR/N. NOTE.
D	LEN1741235	2017/04/13	Ruru	Change Logo
E	CI90268	2019/02/18	Ruru	Modify Note


ALTW
CONFIDENTIAL
2019-02-18
R&D DEPT.



Pin Assignments
Front View

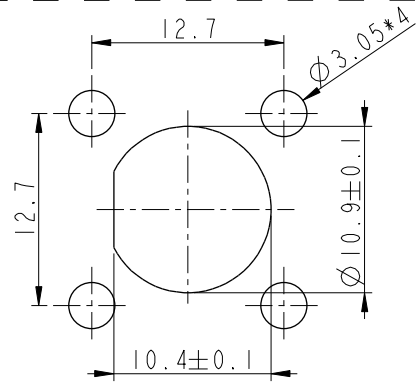

Recommended Panel Cut-Out

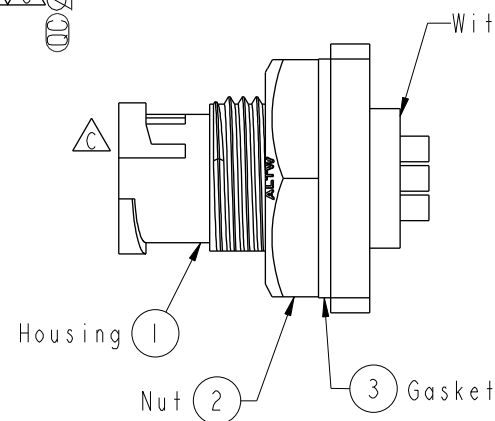

Note:

- * Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Shield: Metal, Nickel Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

* Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.

* Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Mini Panel Lock 5Pin M Conn. M Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. A.3	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO ASU-05PMMS-LS7001	DRAWN BY Ruru	DATE 2019-02-18
DWG NO ASU-05PMMS-LS7001	CHECKED BY Rita	DATE 2019-02-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-18