
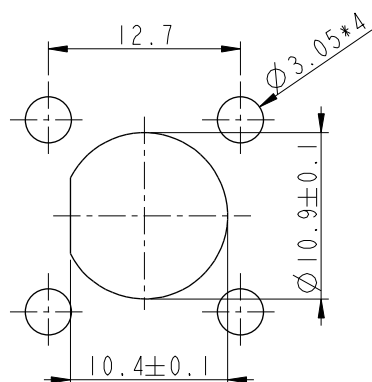
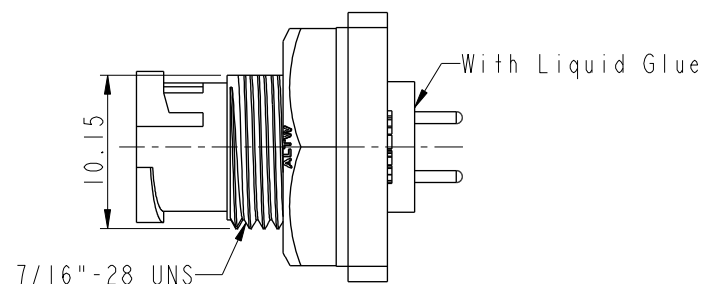





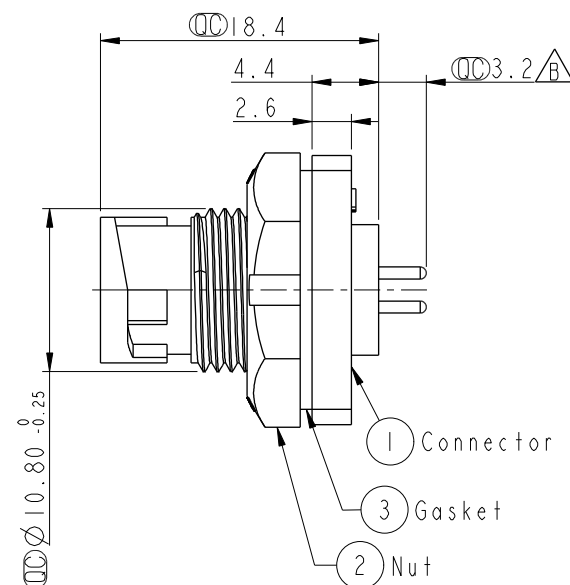
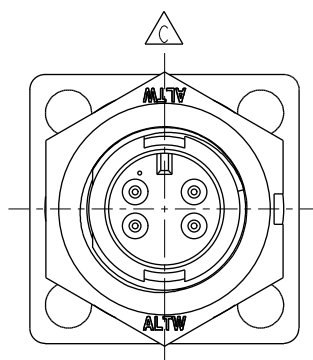

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880487	2008/07/18	Li Xiu Zhi	Change Dimension
C	LEN1640072	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/18	Ruru	Modify Note



PCB Layout



Recommended Panel Cut-Out

Pin Assignments
Front View

Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black



* Use with waterproof cap or dust cap
For Panel Thickness Max: 2.5mm



* Use without waterproof cap or dust cap
For Panel Thickness Max: 3.5mm
* Gasket and Nut are packed separately
in PE bags.

A	UNIT:mm		TITLE			ITEM NO		DRAWN BY		DATE	
			Mini			AU-04PMMP-LS7001		Ruru		2019-02-18	
	TOLERANCE		Panel Lock 4Pin M Conn. M Pin			DWG NO		CHECKED BY		DATE	
	.X ±0.25		SCALE 2:1			AU-04PMMP-LS7001		Rita		2019-02-18	
.XX ±0.1		SIZE A4	SHEET 1 OF 1			CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		WC-REV. A.2	REV. D			ALTW		Max		2019-02-18	
ANGLES ±1°		QC: Inspection item									

Amphenol LTW
安費諾亮泰企業股份有限公司