



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0162	2008/09/10	Shin	Add Note
C	LEN1530229	2014/12/25	Ruru	Change Logo
D	C190268	2019/02/19	Ruru	Modify Note




Pin Assignments





Front View

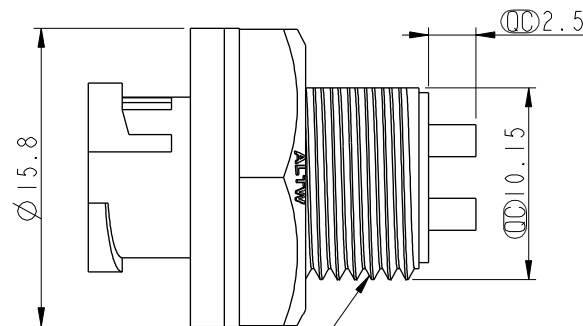

7/16"-28 UNS.



Recommended Panel Cut-Out

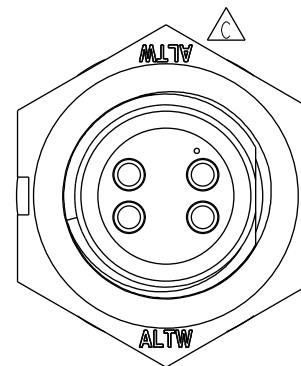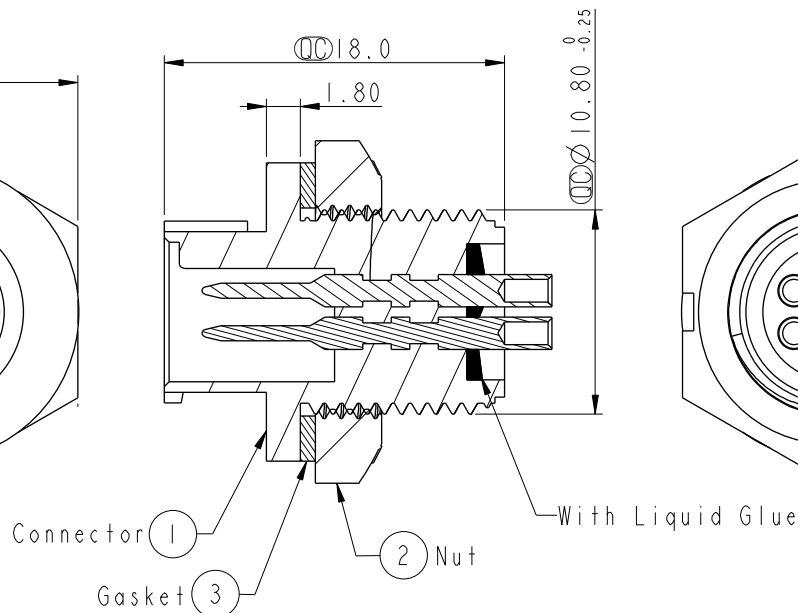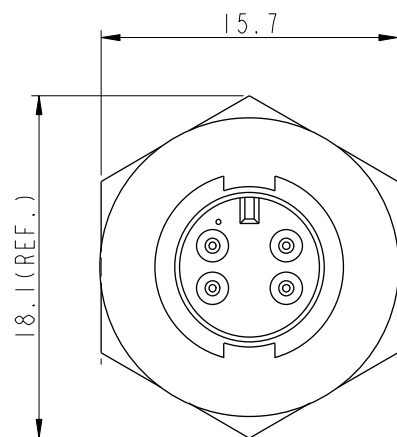

Note: $\triangle D$

- * **QD** Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Blackk
- * Liquid Glue: Clear

- △* Use with waterproof cap or dust cap
Panel Thickness max: 4.0mm
- △* Use without waterproof cap or dust cap
Panel Thickness max: 5.0mm
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm				TITLE Mini Panel Lock 4Pin M Conn. M Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO AU-04RMMS-LC7001		DRAWN BY Ruru		DATE 2019-02-19			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 2:1		SIZE A4				SHEET 1 OF 1		DWG NO AU-04RMMS-LC7001		CHECKED BY Rita		DATE 2019-02-19	
		REV. D		WC-REV. A.2				QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-19	