





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880485	2008/07/18	Li Xiu Zhi	Change Dimension
C	LEN1741240	2017/04/17	Ruru	Change Logo
D	CI90268	2019/02/19	Ruru	Modify Note

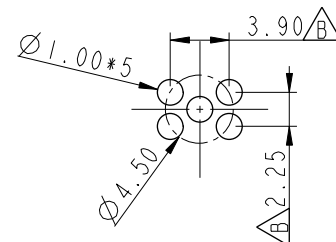


Pin Assignments
Front View 前視圖

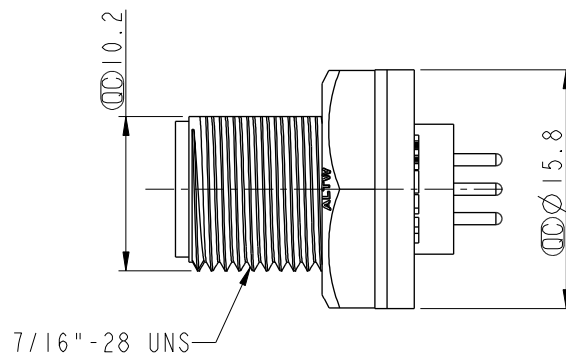

5 Pin Male Connector
Male Pin PCB Layout
5 Pin 公座公Pin
PCB 挖孔位置尺寸圖



Recommended Panel Cut-Out





Note: $\triangle B$ $\triangle D$

- * QC Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black


$\triangle B$ * Use with waterproof cap or dust cap
For Panel Thickness Max: 4.0mm

$\triangle B$ * Use without waterproof cap or dust cap
For Panel Thickness Max: 5.0mm

* Gasket and Nut are packed separately
in PE bags.

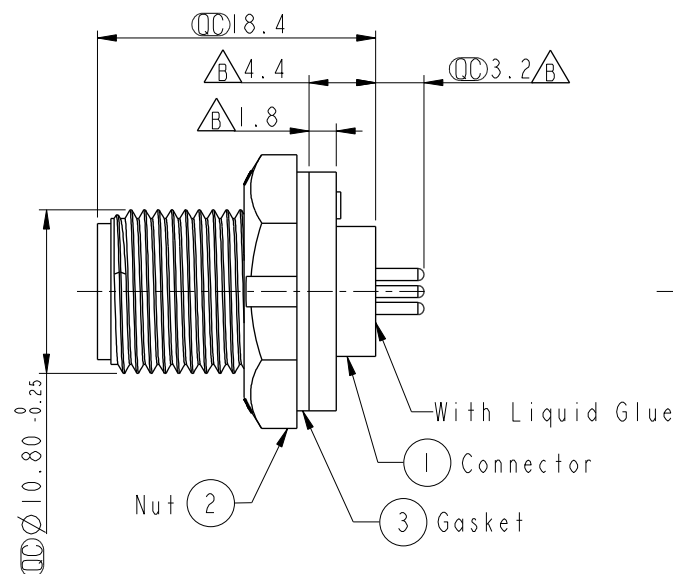

UNIT:mm



TOLERANCE
.X ± 0.25
.XX ± 0.1
.XXX ± 0.05
ANGLES $\pm 1^\circ$

TITLE
SCREW TYPE CONN. FOR PANEL MOUNT
5PIN M CONN. M PIN (2A)

SCALE 2:1 SIZE A4 SHEET 1 OF 1
REV. D WC-REV. A.2 QC : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO
AU-05PMMP-SC7001
DWG NO
AU-05PMMP-SC7001
CUSTOMER
ALTW

DRAWN BY
Ruru
CHECKED BY
Rita
APPROVED BY
Max

DATE
2019/02/19
DATE
2019/02/19
DATE
2019/02/19