

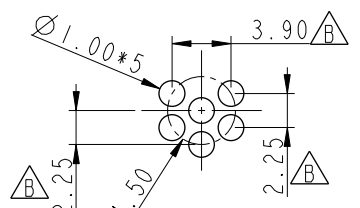
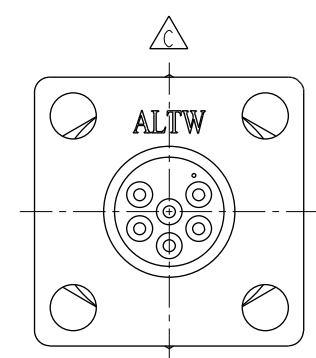
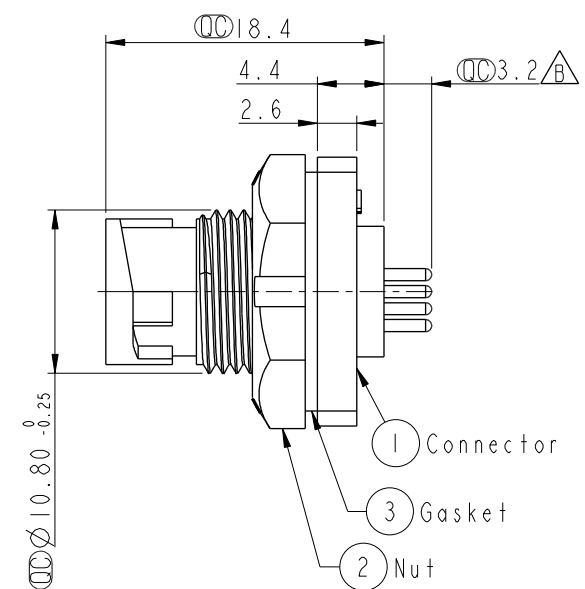
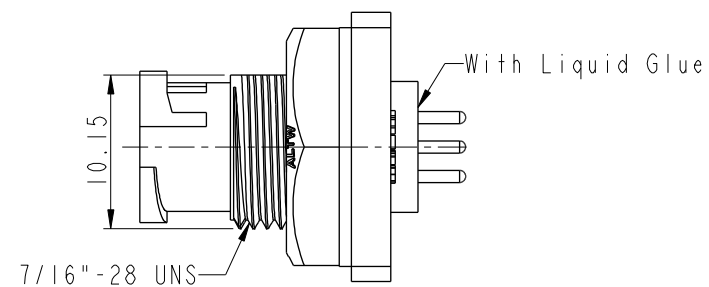


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880489	2008/07/18	Li Xiu Zhi	Change Dimension
C	LEN1640082	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/19	Ruru	Modify Note




PCB Layout

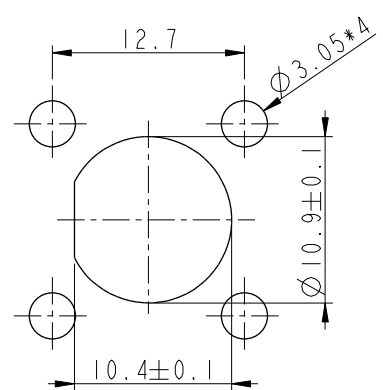

Recommended Panel Cut-Out



Pin Assignments
Front View

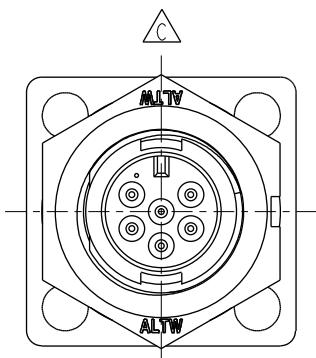

- Note:**
- * $\varnothing$ Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black

- B*** Use with waterproof cap or dust cap
For Panel Thickness Max: 2.5mm
- B*** Use without waterproof cap or dust cap
For Panel Thickness Max: 3.5mm
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Mini Panel Lock 6Pin M Conn. M Pin			ITEM NO AU-06PMMP-LS7001		DRAWN BY Ruru		DATE 2019-02-19	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1	SIZE A4	SHEET 1 OF 1	DWG NO AU-06PMMP-LS7001		CHECKED BY Rita		DATE 2019-02-19	
REV. D		WC-REV. A.2	$\varnothing$ Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-19	

Amphenol LTW
安費諾亮泰企業股份有限公司