
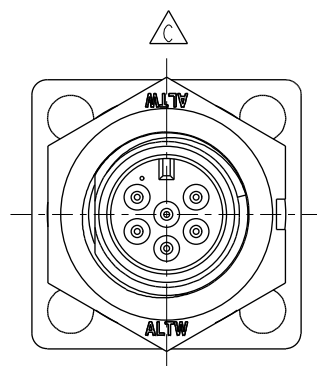
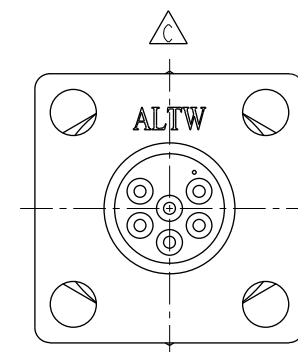
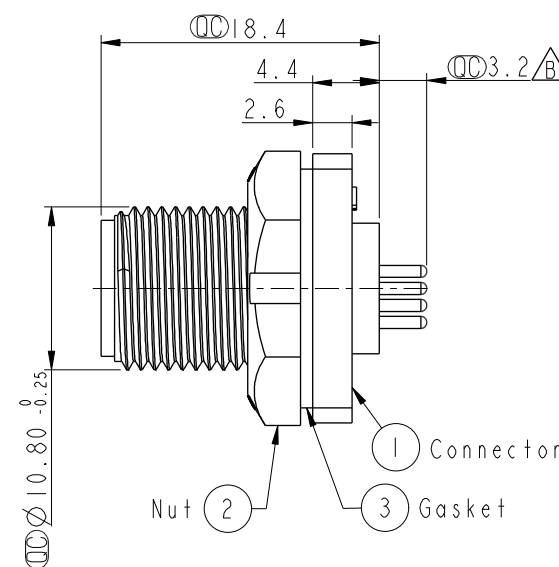
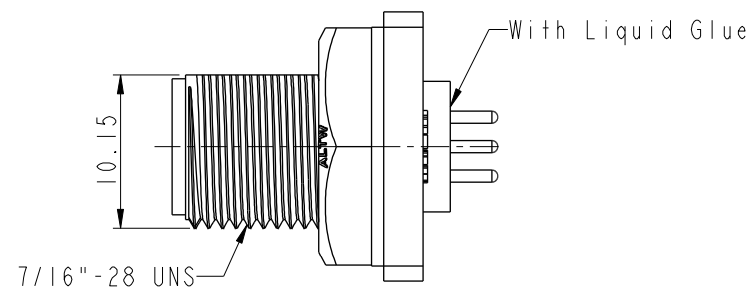




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880492	2008/07/18	Li Xiu Zhi	Change Dimension
C	LEN1640083	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/19	Ruru	Modify Note




△ Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- △* Use with waterproof cap or dust cap
For Panel Thickness Max: 4.0mm
- △* Use without waterproof cap or dust cap
For Panel Thickness Max: 5.0mm
- * Gasket and Nut are packed separately
in PE bags.

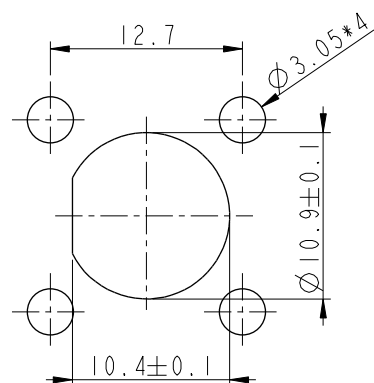

Recommended Panel Cut-Out



Pin Assignments
Front View

UNIT:mm		TITLE		Mini		ITEM NO		DRAWN BY		DATE	
				Panel Screw 6Pin M Conn. M Pin		AU-06PMMP-SS7001		Ruru		2019-02-19	
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO		CHECKED BY		DATE	
.X ±0.25		2:1	A4	1	1	AU-06PMMP-SS7001		Rita		2019-02-19	
.XX ±0.1		REV.	WC-REV.	QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		D	A.2			ALTW		Max		2019-02-19	
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司