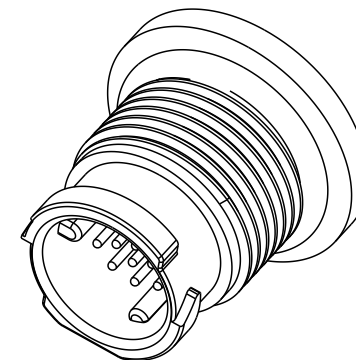
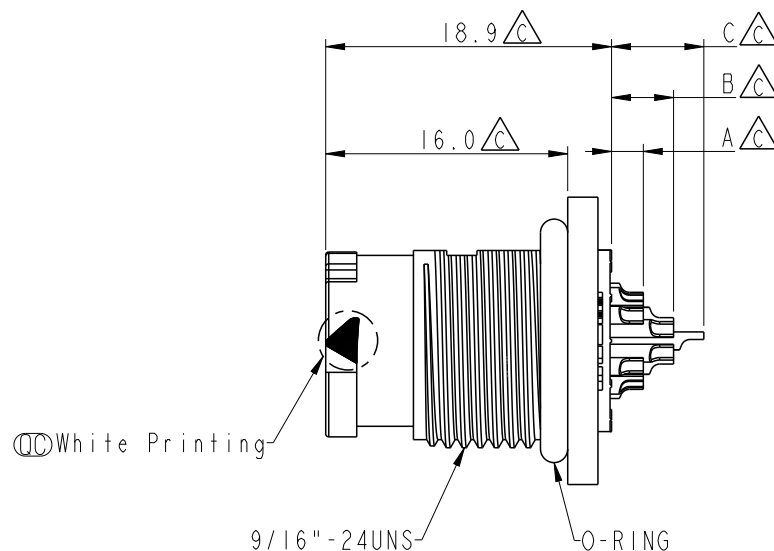
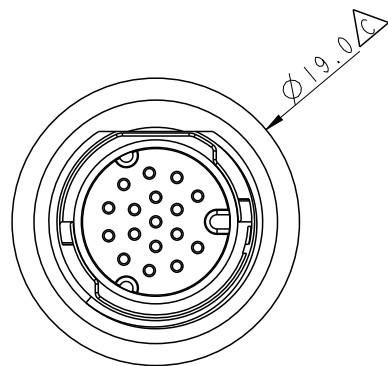


AZ-10PMMS-QC800I	2.1	4.1	
AZ-12PMMS-QC800I	2.1	4.1	
AZ-17PMMS-QC800I	2.1	4.1	6.1
Item No.	A	B	C
	Pin伸出長度		

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof Rate: IPX8, Unmated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * O-Ring: Rubber, Gray
- * Use without waterproof cap or dust cap
 - Panel thickness Max: 4.0mm
- * Use with waterproof cap or dust cap
 - Panel thickness Max: 3.0mm
- * Nut is packed separately in PE bag




UNIT: mm	
TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE			
XLOK, A-1.5A, FRONT FASTENED M, M, SOLDER, PUSH LOCK 			
SCALE	1:1	SIZE	A4
SHEET	1	OF	2
REV.	C	WC-REV.	.0
QC: Inspection item			


Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ouyang	DATE 2021-03-24
DWG NO AZ-XXPMMS-QC8001	CHECKED BY Jerry	DATE 2021-03-24
CUSTOMER ALTW	APPROVED BY Fred	DATE 2021-03-24


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

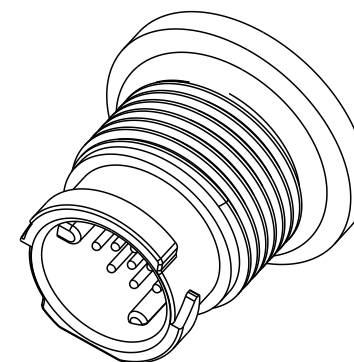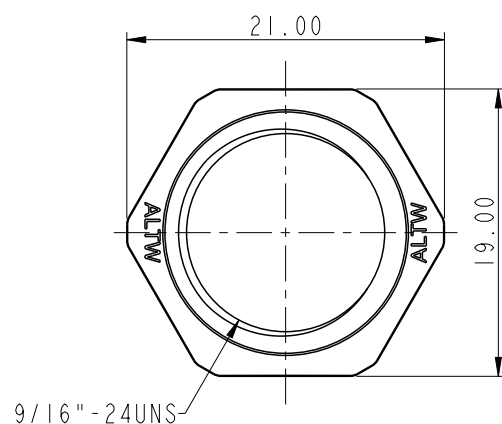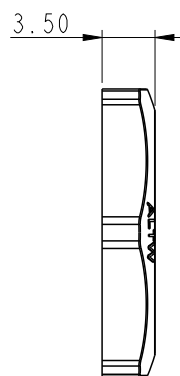


NUT



10Pin



12Pin




17Pin

Pin Assignments Front View(10~17PIN)

△ AZ-XXPMMS-QC8001

XX: No. Of Pin

UNIT:mm



TITLE
XLOK, A-1.5A, FRONT FASTENED
M, M, SOLDER, PUSH LOCK



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°



SCALE
1:1

SIZE
A4

SHEET
2 OF 2

REV.
C

WC-REV.
.0

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

DRAWN BY

CHECKED BY

APPROVED BY

DATE

DATE

DATE

Ouyang

Jerry

Fred

2021-03-24

2021-03-24

2021-03-24

ALTW