
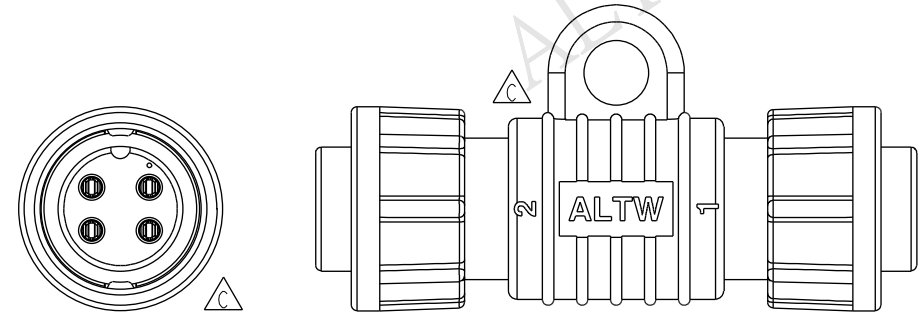


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-860079	2008/04/25	Ivan	Change Tolerance & BOM
C	LE3I5I0403	2015/01/26	Vicky	Update Logo & Orientation & Note

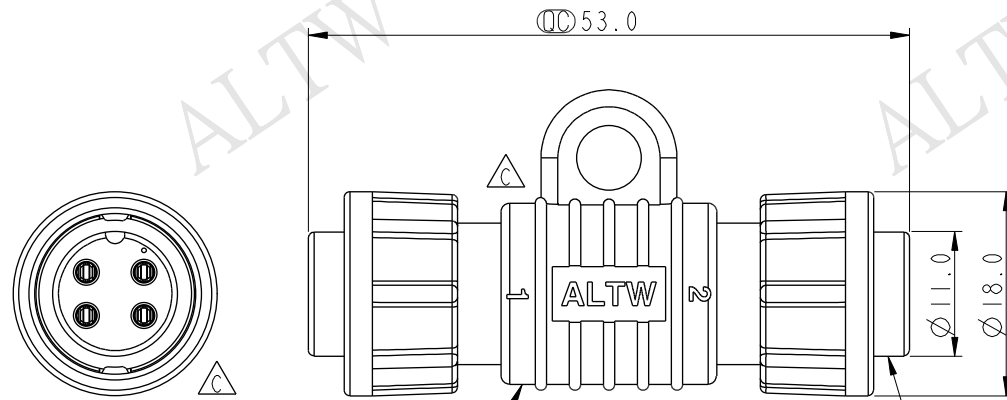

Conn.1



Wire Harness 5~8
Inner Mold 9
Outer Mold 10
Color: Black

Front View

Conn.2

Back View

- 1 Housing
- 2 Pin
- 3 Lock Nut
- 4 O-Ring



Conn.1&2
Pin Assignments
Front View

4	White	白	4
3	Black	黑	3
2	Blue	藍	2
1	Brown	棕	1
Conn.1	Wire Color	Conn.2	
Pin Out			

Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate: IP66
- * Connector: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Lock Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Wire Harness: UL1007 24AWG

UNIT:mm
TOLERANCE
 ± 0.5 mm

TITLE Standard I Adaptor Lock 4Pin FF Conn FF Pin			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.5	$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BA-000404-OFF-IL001	DRAWN BY Vicky	DATE 2015-01-26
DWG NO BA-000404-OFF-IL001	CHECKED BY Sam	DATE 2015-01-26
CUSTOMER ALTW	APPROVED BY Rita	DATE 2015-01-26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.