
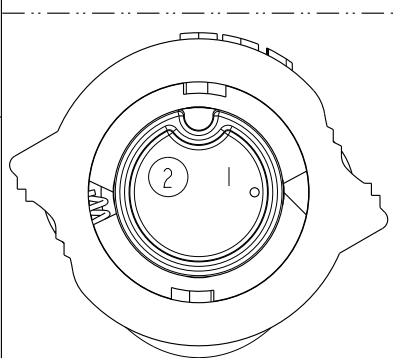



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1540296	2015-04-16	Micky	Modify #2 Wire Colore
C	LEN1720200	2017-02-13	Frank Deng	Change dimension from 34.0 to 34.7

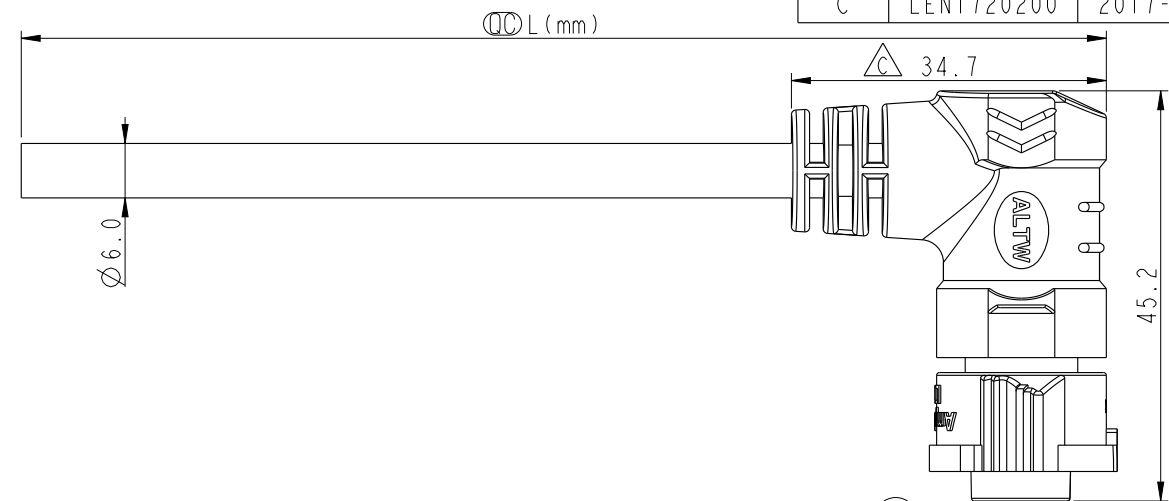

Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	
Pin Out		

BB-02AFMM-QR8DXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters

Note:
* Ⓛ Important Dimension To Check.
* Waterproof Rate: IP68(Mated, 1M/24H)
* Working Voltage Rating: AC 300 V
* Working Current Rating: 10A
* Flame Class: UL94V-0
* Housing: Nylon+GF, Black.(UV Resistance)
* Male Pin: Copper Alloy, Gold Plated.
* Rubber: Silicon, Gray
* Cable: UL21388 16AWG*2C+AL+My
PVC Jacket UV Resistant, OD=6.0, Black.
* Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE .X ±0.5		TITLE X-Lok B-Size Molding F Conn M 2 Pin		ITEM NO		DRAWN BY Frank Deng		DATE 2017-02-13	
SCALE 6:5		SIZE A4		SHEET 1 OF 1		DWG NO BB-02AFMM-QR8DXX		CHECKED BY Spring Liu		DATE 2017-02-13	
REV. C		WC-REV. A.2		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2017-02-13	

Amphenol LTW
安費諾亮泰企業股份有限公司