




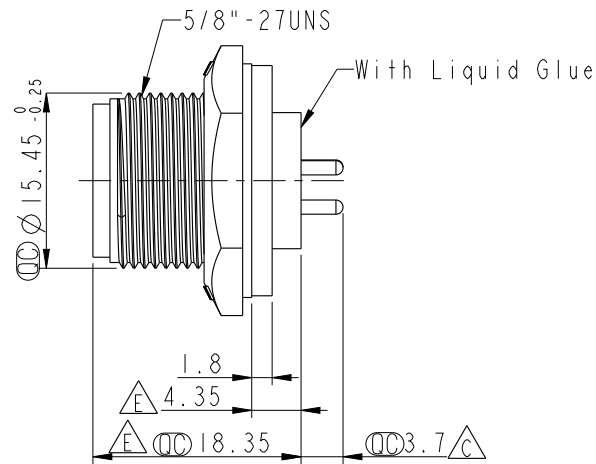
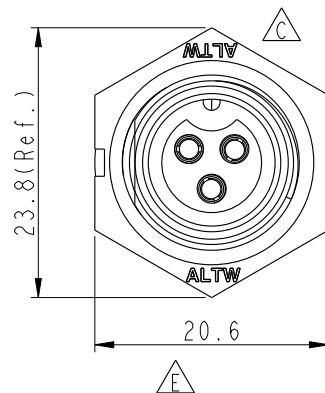



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1740226	2017/03/28	Ruru	Change Logo & Note & Dimension 3.6 To 3.7
D	CI90274	2019/02/19	Ruru	Modify Note
E	CI91557	2019/09/04	Nan_Su	Modify Mold



Pin Assignments
Front View



Recommended Panel Cut-Out

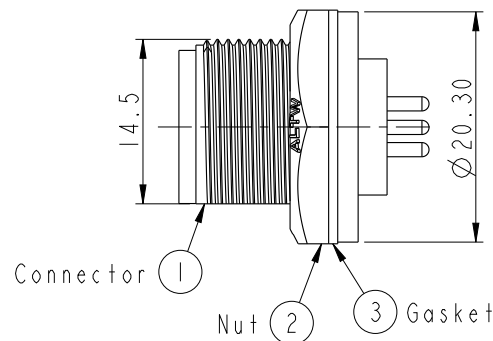

- Note:  
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - *  Use with Waterproof Cap or Sustcap
Panel Thickness Max: 3.0mm
 - *  Use without Waterproof Cap or Sustcap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard,Panel Screw 3Pin M Conn F Pin		BB-03PMFP-SC7001		Nan_Su		2019-09-04	
.XXX ±0.05		ANGLES ±1°		SCALE 1:1		DWG NO BB-03PMFP-SC7001		CHECKED BY Feng-Li		DATE 2019-09-04	
REV. E		WC-REV. .0		SIZE A4		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2019-09-04	
				SHEET 1 OF 1							
				QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司