
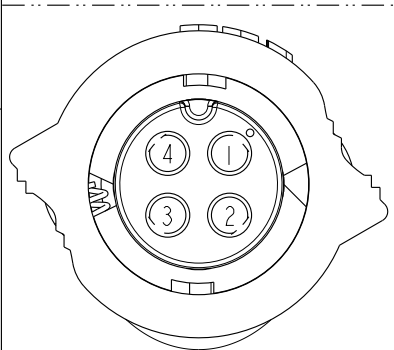



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720210	2017-02-13	Frank Deng	Change dimension from 34.0 to 34.7

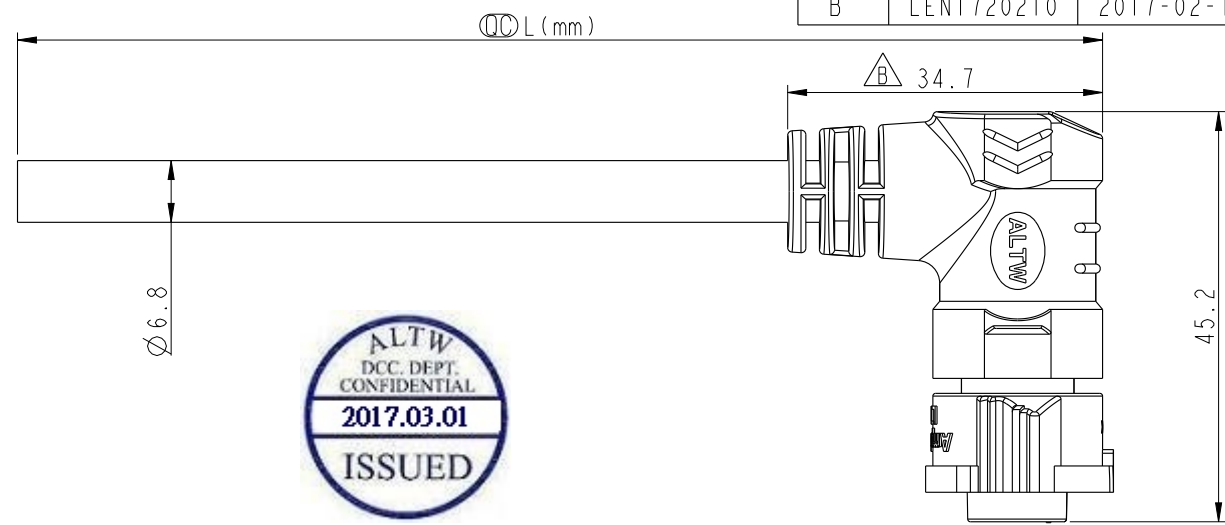

Pin Assignments
Front View

4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

BB-04AFFM-QR8DXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
:
:
99 :99Meters

Note:
* ① Important Dimension To Check.
* Waterproof Rate: IP68(Mated)
* Working Voltage Rating: AC 300 V
* Working Current Rating: 10A
* Flame Class: UL94V-0 (UV Resistance)
* Housing: Nylon+GF, Black.
* Female Pin: Copper Alloy, Gold Plated.
* Rubber: Silicon, Gray
* Cable: UL21388 16AWG*4C+AL+My
PVC Jacket UV Resistant, OD=6.8, Black.
* Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		
TOLERANCE .X	±0.5	

TITLE X-Lok B-Size Molding F Conn F 4 Pin			
SCALE 6:5	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	<u>QC</u> : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Frank Deng	DATE 2017-02-13
DWG NO BB-04AFFM-QR8DXX	CHECKED BY Spring Liu	DATE 2017-02-13
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2017-02-13