
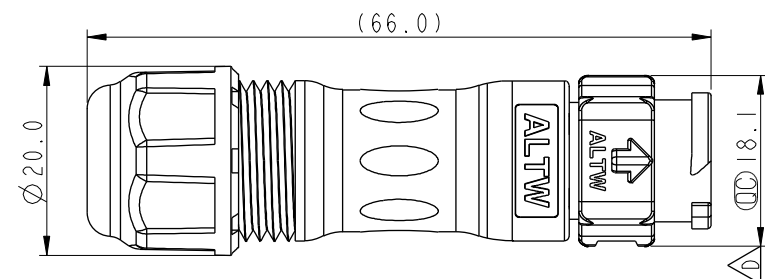




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI91677	2019/09/24	Brady Chung	Add New Type
C	CI91760	2019/10/15	Jane	$\triangle C$ X5
D	CI92018	2019/11/15	Vicky	$\triangle D$ X4

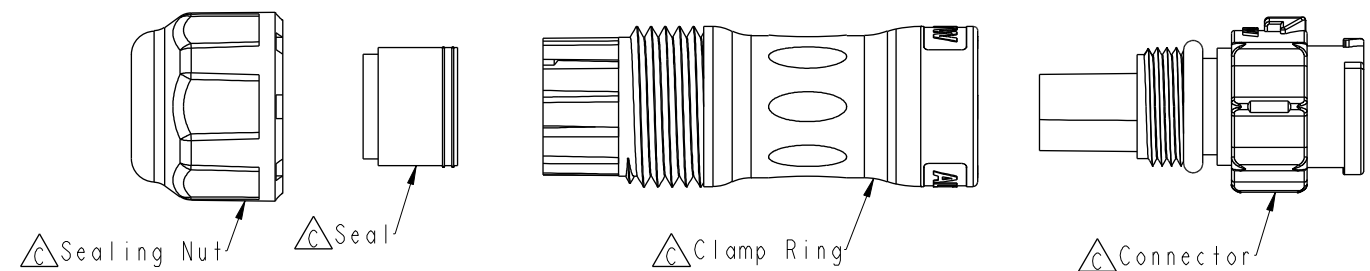


BB-XXBMFA-QL8XPP
02-2Pin
03-3Pin


S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

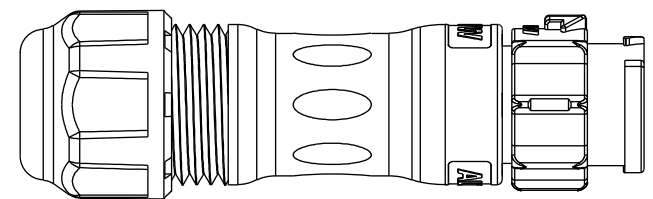

Pin
Assignments
Front View



2 Pin



3 Pin

- $\triangle D$ Note:
- * ϕ Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

UNIT:mm		TITLE	XLOK, B-10A, CABLE W/O SR M, F, FI CRIMP, XLOK $\triangle D$		
TOLERANCE	$\pm 0.5mm$	SCALE	1:1	SIZE	A4
REV.	D	WC-REV.	A.5	SHEET	1 OF 1
QC: Inspection item					

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Neo Tsai	2019-09-24