REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/14	Vicky	Change Note
C	C220466	2022/04/08	Ruru	△C X5

△C
BB-XXPMFS-QC8001
XX: No. Of Pin

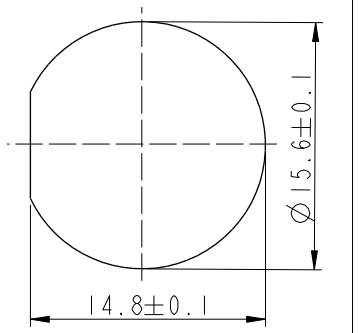

Recommended
Panel Cut-out

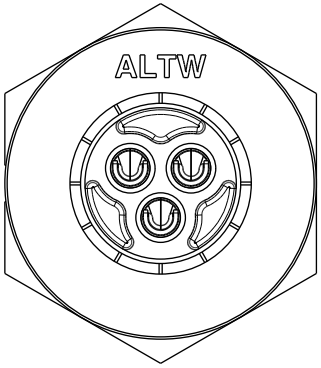

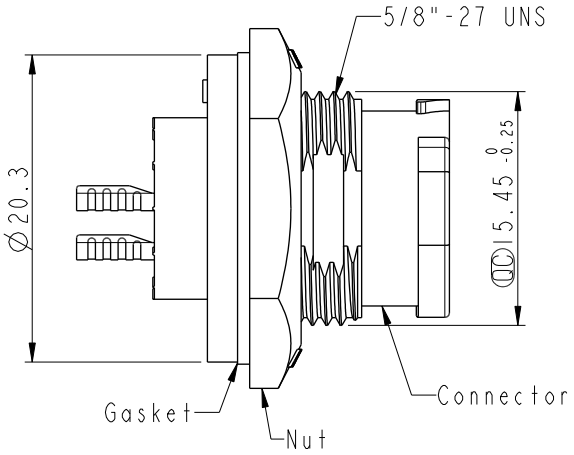

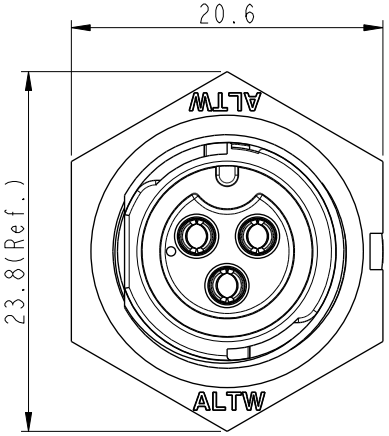

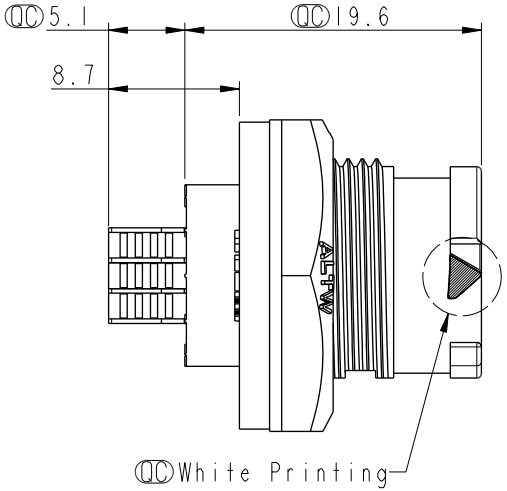

△C

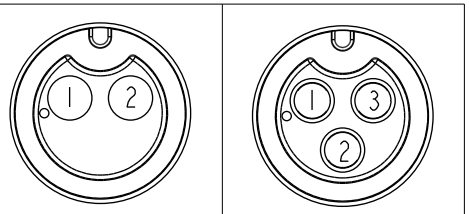

2P 3P

Pin Assignment Front View

Note: △B △C
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* Use with waterproof cap or dust cap
  Panel thickness max: 3.0mm
* Use without waterproof cap or dust cap
  Panel thickness max: 4.0mm
* Gasket and nut are packed separately
  in pe bag

UNIT:mm

TOLERANCE
.X ± 0.25 mm

TITLE: XLOK, B-10A, FRONT FASTENED M, F, SOLDER, PUSH LOCK △C

SCALE	SIZE	SHEET
2:1	A4	1 OF 1
REV. C	WC-REV. A.3	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2019-03-14
DWG NO: BB-XXPMFS-QC8001 △C	CHECKED BY: Rita	DATE: 2019-03-14
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-03-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.