


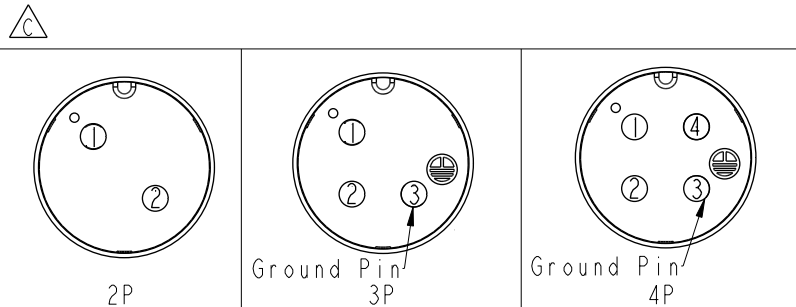
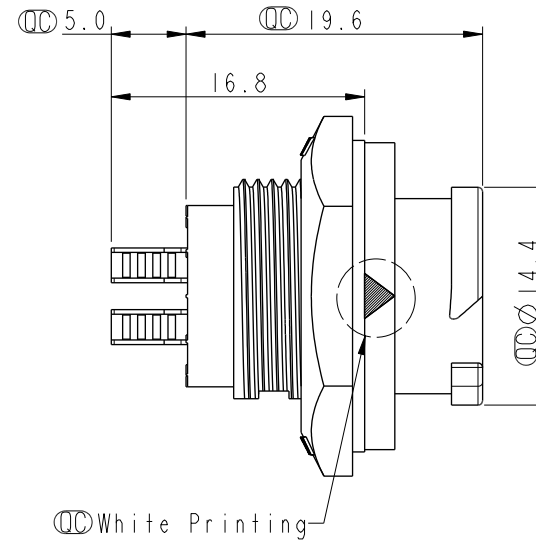
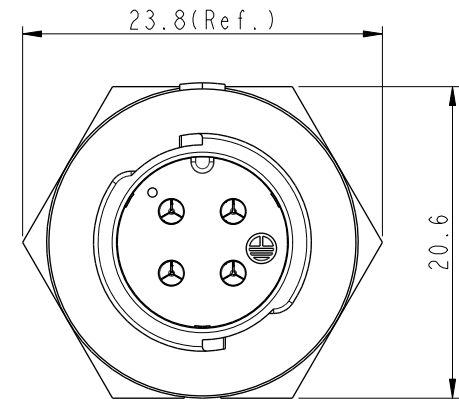


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/14	Vicky	Change Note
C	C220466	2022/04/13	Ruru	 X5

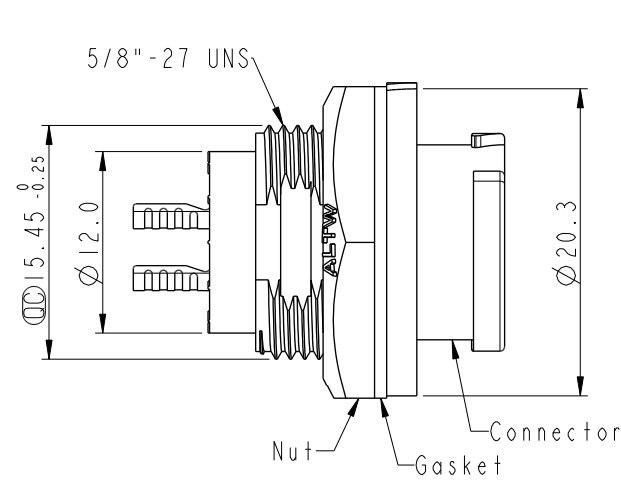

Recommended
Panel Cut-out

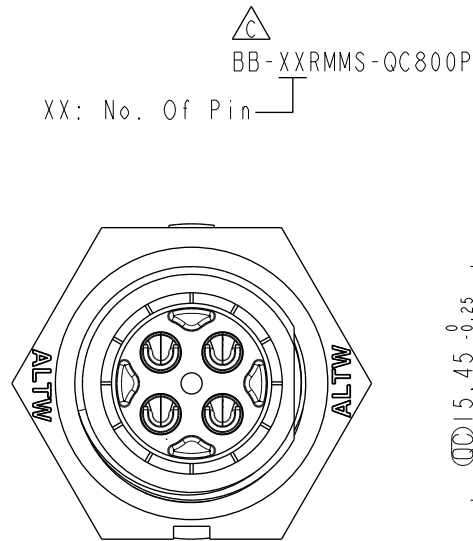

Pin Assignment Front View

Note: 

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * For panel thickness max: 4.5mm
- * Gasket and nut are packed separately in pe bag

UNIT:mm				TITLE XLOK, B-10A, REAR FASTENED M, M, SOLDER, PUSH LOCK 			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Vicky		DATE 2019-03-14		
TOLERANCE .X ± 0.25 mm		SCALE 2:1		SIZE A4		SHEET 1 OF 1			DWG NO BB-XXRMS-QC800P 		CHECKED BY Rita		DATE 2019-03-14		
		REV. C		WC-REV. A.1		QC: Inspection item				CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-14	

Amphenol LTW
安費諾亮泰企業股份有限公司