




F
E
D
C
B
A


BBD-XXRMFS-QC8001
XX: No. Of Pin

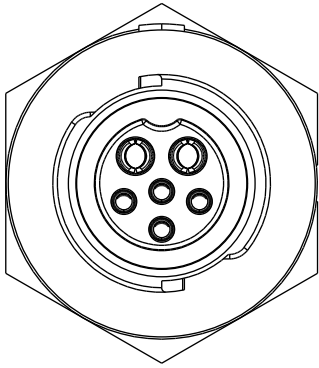



6P

Pin Assignment
Front View

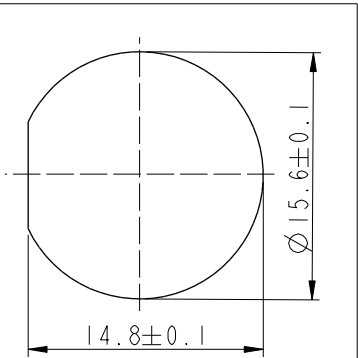


Recommended
Panel Cut-out

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/05/07	Spring	Change Rev.01 To Rev.A
B	C190411	2019/03/14	Vicky	Change Note
C	C220644	2022/04/28	Ruru	 X4

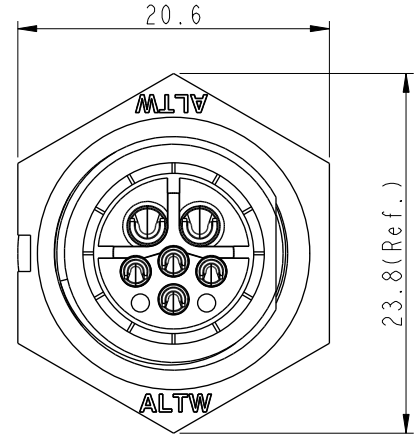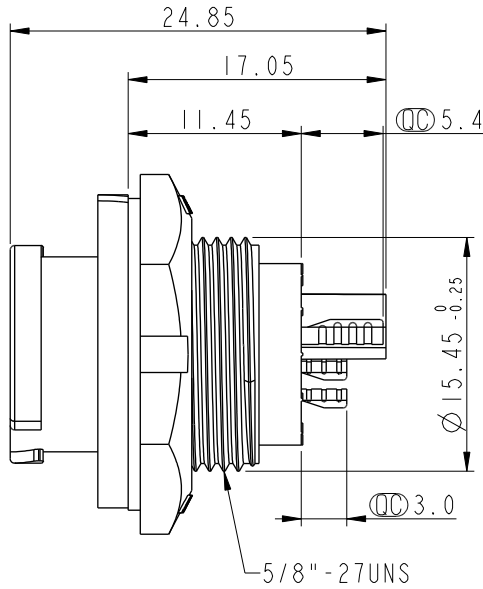

 White Printing

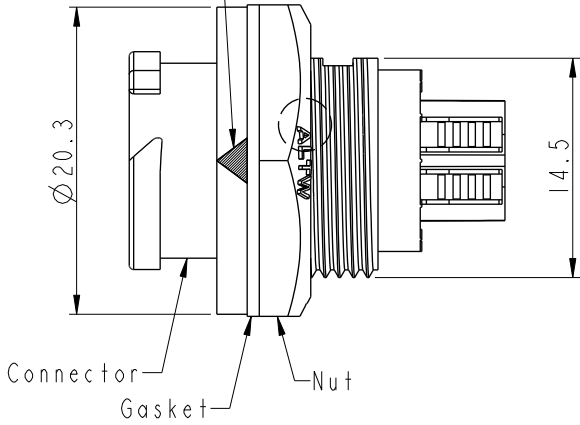

Note: 
* RoHS Compliant
*  Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* For panel thickness max: 4.5mm
* Gasket and nut are packed separately in pe bag

Amphenol LTW
安費諾亮泰企業股份有限公司

UNIT:mm			TITLE XLOK, B-10A+5A, REAR FASTENED M, F, SOLDER, PUSH LOCK 
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 2:1	SIZE A4	SHEET 1 OF 1
REV. C	WC-REV. A.3	 Inspection item	

ITEM NO	DRAWN BY Vicky	DATE 2019-03-14
DWG NO BBD-XXRMFS-QC8001 	CHECKED BY Rita	DATE 2019-03-14
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.