REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/05/07	Spring	Change Rev.01 To Rev.A
B	C190411	2019/03/14	Vicky	Change Note
C	C220644	2022/04/28	Ruru	△C X4

△C
BBD-XXRMMS-QC8001
XX: No. Of Pin

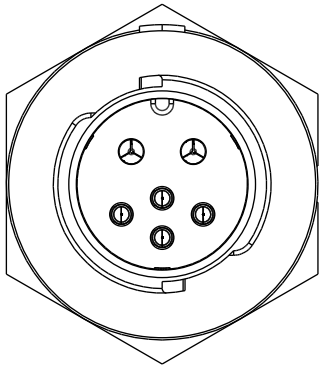

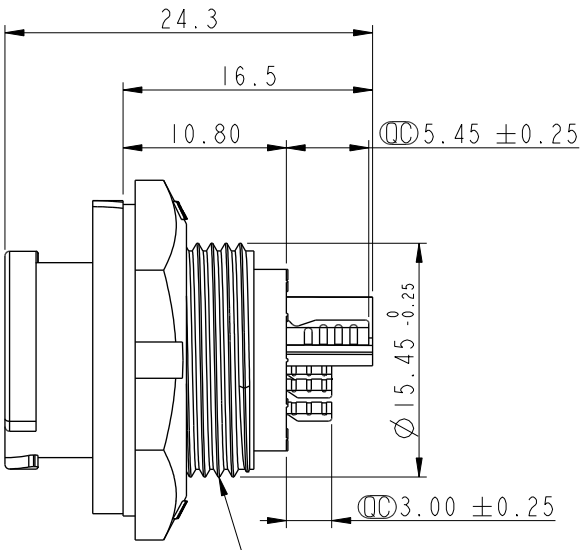

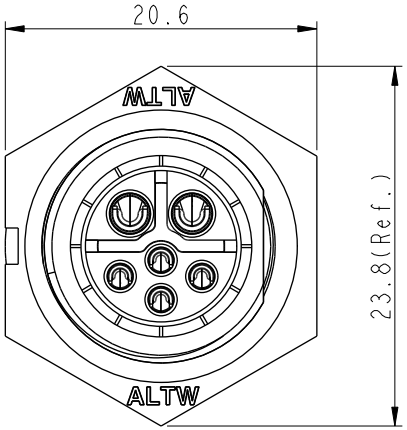

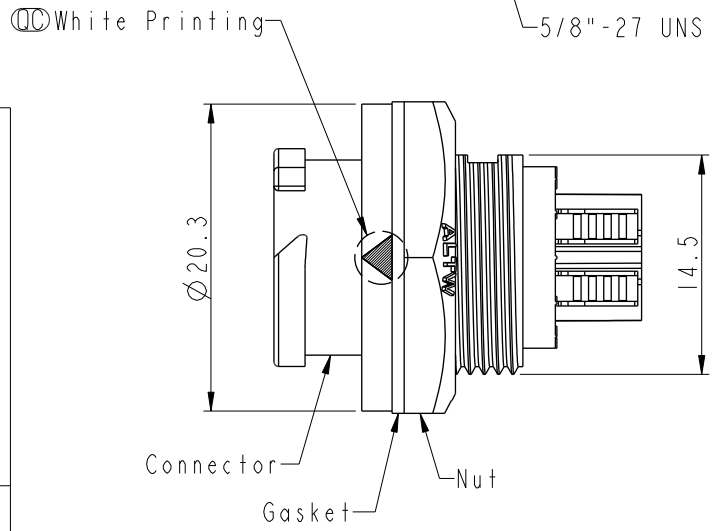



6P

Pin Assignment
Front View

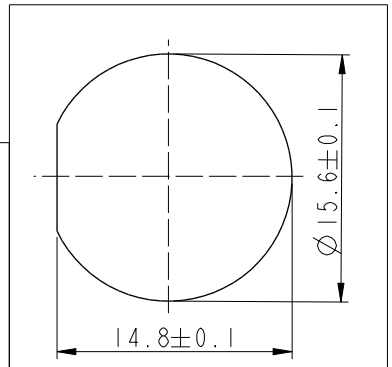

Recommended
Panel Cut-out

Note: △B △C
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* For panel thickness max: 4.5mm
* Gasket and nut are packed separately in pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: XLOK, B-10A+5A, REAR FASTENED M, M, SOLDER, PUSH LOCK △C

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1
REV. C | WC-REV. A.5 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2019-03-14
DWG NO: BBD-XXRMMS-QC8001 △C	CHECKED BY: Rita	DATE: 2019-03-14
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-03-14

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.