

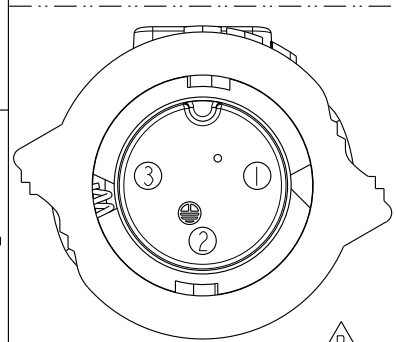


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31680202	2016-07-16	Tom Gu	Change Part No. of Half Finished

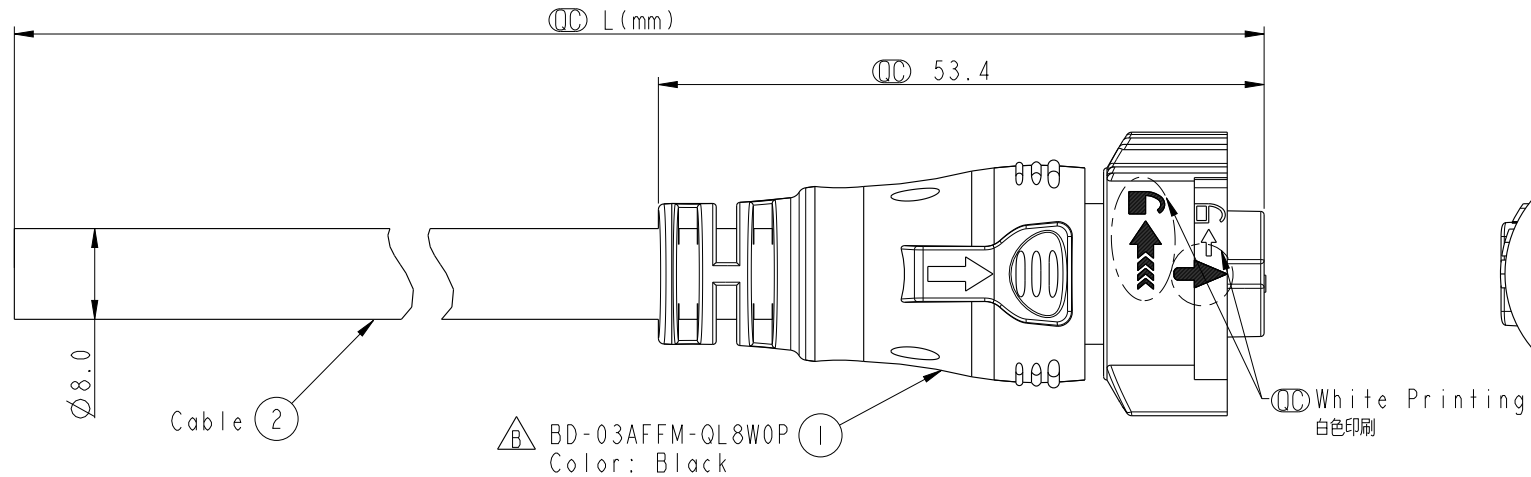

Pin Assignments
Front View



3	White	白
2	Green	綠
1	Black	黑
Conn.	Wire Color	
	Pin Out	

BD-03AFFM-QL8E XX

XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 :
 :
 :
 99 : 99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68 (Mated)
(in 1 meter water within 24 hours)
 - * Working Voltage Rating: AC 300 V
 - * Working Current Rating: 5A
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Rubber: Silicon, Gray
 - * Cable: SJTW 18AWG*3C + Filler
PVC Jacket UV Resistant, OD=8.0, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE X-Lok B-Size (Power) Molding F Conn F 3 Pin			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO		DRAWN BY Tom Gu		DATE 2016-07-16	
TOLERANCE ±0.5		SCALE 3:2	SIZE A4	SHEET 1 OF 1		DWG NO BD-03AFFM-QL8EXX	CHECKED BY Spring Liu		DATE 2016-07-16		
		REV. B	WC-REV. A.1	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Kevin Hu		DATE 2016-07-16		