
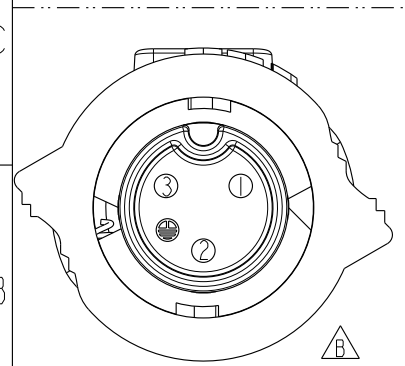
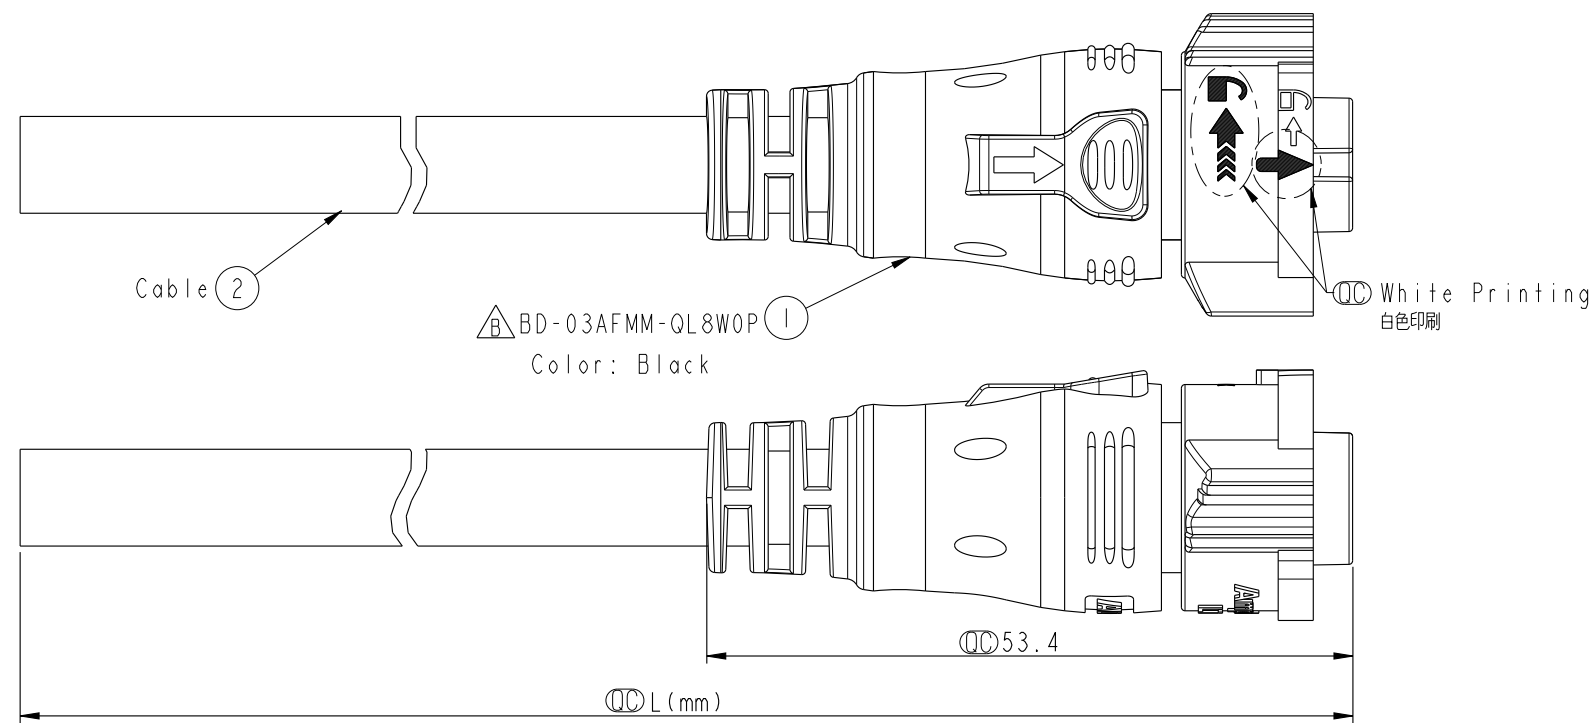
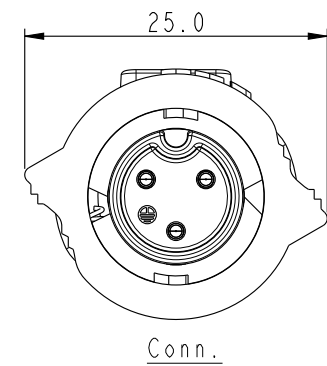


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31680204	2016-07-18	Tom Gu	Change Part No. of Half Finished



3	White	白
2	Green	 緑
1	Black	黒
Conn.	Wire Color	
Pin Out		

BD-03AFMM-QL8EXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters

Cable Length(L):01~99Meters

Note:

- * ⌀ Important Dimension To Check.
- * Waterproof Rate: IP68 (Mated)
(in 1 meter water within 24 hours)
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 5A
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Rubber: Silicone, Gray
- * Cable: SJTW 18AWG*3C PVC Jacket
UV Resistant, OD=8.0, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
±0.5				X-Lok B-Size (Power) Molding F Conn M 3 Pin		BD-03AFMM-QL8EXX		Tom Gu		2016-07-18	
SCALE		SIZE		SHEET		DWG NO		CHECKED BY		DATE	
8:5		A4		1 OF 1		ALTW		Spring Liu		2016-07-18	
REV.		WC-REV.		QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
B		A.2						Kevin Hu		2016-07-18	

Amphenol LTW
安費諾亮泰企業股份有限公司