








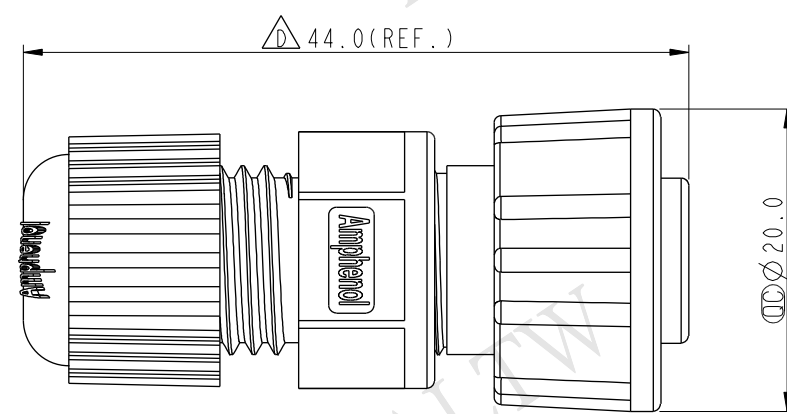












1		2		3		4		5		6		7		8													
F △C ALTW CONFIDENTIAL 2014-11-20 R&D DEPT. ALTW DCC. DEPT. CONFIDENTIAL 2014.12.03 ISSUED		REV.		ECN NO.		DATE		SIGN		DESCRIPTION																	
		B		LE3-910095		2009/01/08		Li Xiu Zhi		Change Screw Nut View																	
		C		LEN-0C0556		2010/11/26		Ivan		Change View																	
		D		LEN14C0028		2014/11/20		Vicky		Update Logo, Dime. & Pin Assignments																	
E △D  Sealing Nut 7		△D  Seal 6		△D  Clamp Ring 5		△D  Gasket 4		△D  Screw Nut 3		△C  Connector 1		△C  O-Ring 2		D △D  Sealing Nut 7		E △D  Seal 6		F △D  Clamp Ring 5		G △D  Gasket 4		H △D  Screw Nut 3		I △C  Connector 1		J △C  O-Ring 2	
C △B △D  Pin Assignments Front View		D △D 44.0 (REF.)  44.0 (REF.)		E △D  Sealing Nut 7		F △D  Seal 6		G △D  Clamp Ring 5		H △D  Gasket 4		I △D  Screw Nut 3		J △C  Connector 1		K △C  O-Ring 2											
B △B △D  Pin Assignments Front View		C △D  Sealing Nut 7		D △D  Seal 6		E △D  Clamp Ring 5		F △D  Gasket 4		G △D  Screw Nut 3		H △C  Connector 1		I △C  O-Ring 2													
A UNIT:mm  TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		TITLE STANDARD ASSY SCREW 3PIN F CONN F PIN SCALE 5:4 SIZE A4 SHEET 1 OF 1 REV. D WC-REV. A.2 QC: Inspection item		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BD-03BFFA-SL7001 DWG NO BD-03BFFA-SL7001 CUSTOMER ALTW		DRAWN BY Vicky CHECKED BY Sam APPROVED BY Rita		DATE 2014-11-20 DATE 2014-11-20 DATE 2014-11-20																	
1		2		3		4		5		6		7		8													

Note:

- * (QC) Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM, Black
- * Screw Nut: Nylon+GF, Black
- * Gasket: EPDM, Black
- * Clamp Ring: Nylon, Black
- * Seal: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Seal For Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * One Set Unassembled In One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.