


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720231	2017-02-15	Frank Deng	Change dimension from 34.0 to 34.7

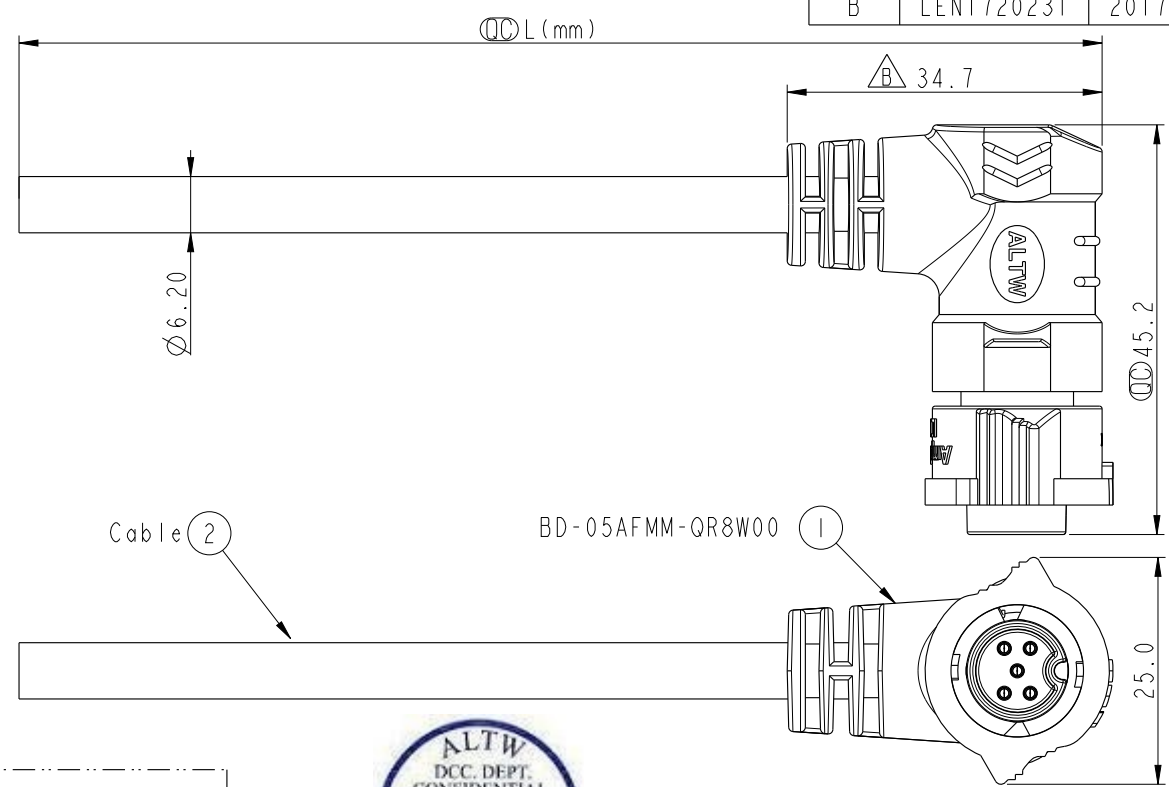



BD-05AFMM-QR8DXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters

Cable Length(L): 01~99Meters

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP68(Mated)
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 5A
- * Flame Class: UL94V-0 (UV Resistance)
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Rubber: Silicone, Gray
- * Cable: UL21388 20AWG*5C+AL+My
PVC Jacket UV Resistant, OD=6.2, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

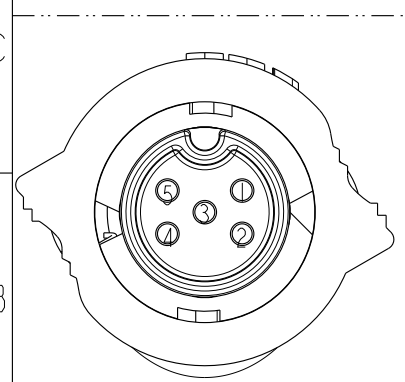

Pin Assignments
Front View

5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm		TOLERANCE .X ±0.5		TITLE X-Lok B-Size Molding F Conn M 5 Pin		ITEM NO		DRAWN BY Frank Deng		DATE 2017-02-15	
SCALE 6:5		SIZE A4		SHEET 1 OF 1		DWG NO BD-05AFMM-QR8DXX		CHECKED BY Spring Liu		DATE 2017-02-15	
REV. B		WC-REV. A.2		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2017-02-15	
										FMW10702-01-02A1	

Amphenol LTW
安費諾亮泰企業股份有限公司