

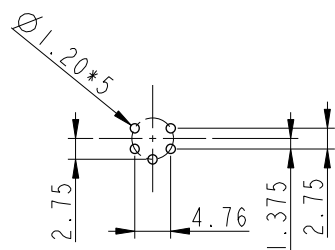

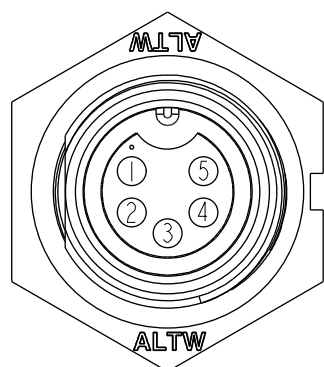
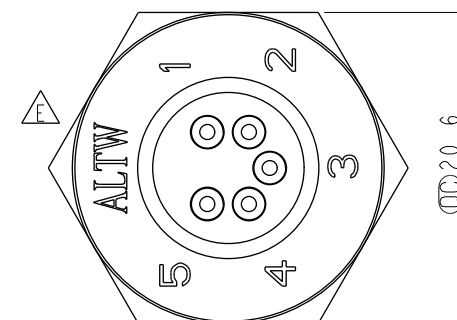



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LE3-870044	2007/11/05	Tina	Change To Pin Hole
E	LEN1660754	2016/06/06	Ruru	Change Logo
F	CI90273	2019/02/23	Ruru	Modify Note

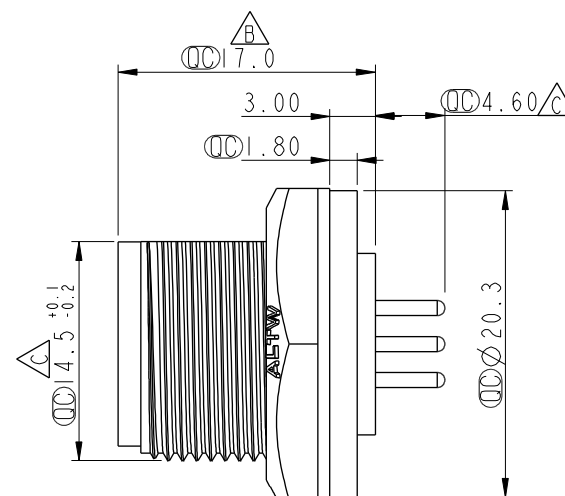


5 Pin Male Connector
Female Pin PCB Layout

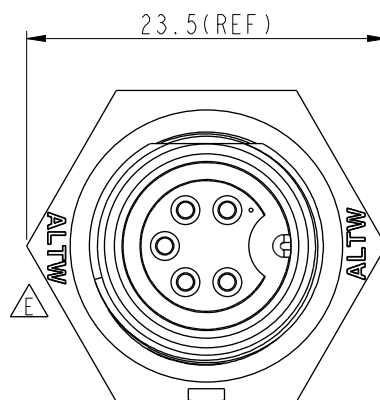

Pin Assignments
Front View

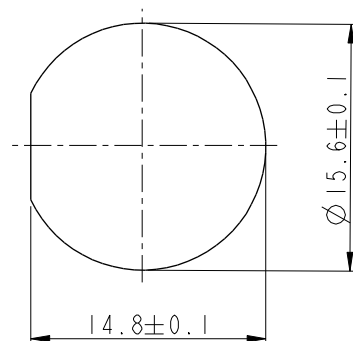

Recommended Panel Cut-out

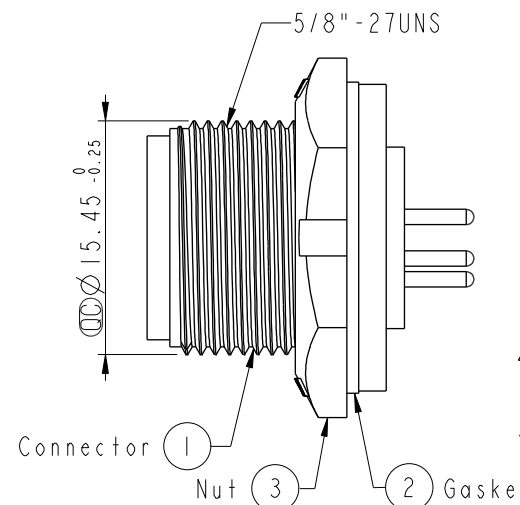

Note: $\triangle F$

- * 重要尺寸 Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

$\triangle D$ * Use With Waterproof Cap Or Dust Cap
For Panel Thickness Max: 3.0mm

$\triangle D$ * Use Without Waterproof Cap Or Dust Cap
For Panel Thickness Max: 4.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE	Standard Panel Lock 5Pin M Conn F Pin
TOLERANCE	± 0.25	SCALE	2:1
.X	± 0.1	SIZE	A4
.XX	± 0.05	SHEET	1 OF 1
.XXX	$\pm 1^\circ$	REV.	F
ANGLES		WC-REV.	A.3
		QC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BD-05PMFP-SC7001	DRAWN BY	Ruru	DATE	2019-02-23
DWG NO	BD-05PMFP-SC7001	CHECKED BY	Rita	DATE	2019-02-23
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-23