
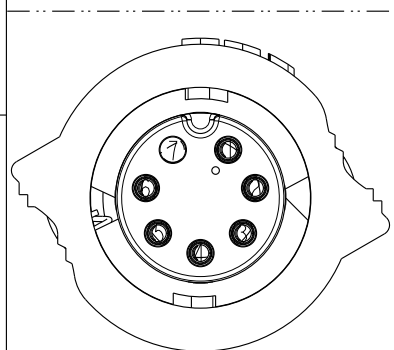
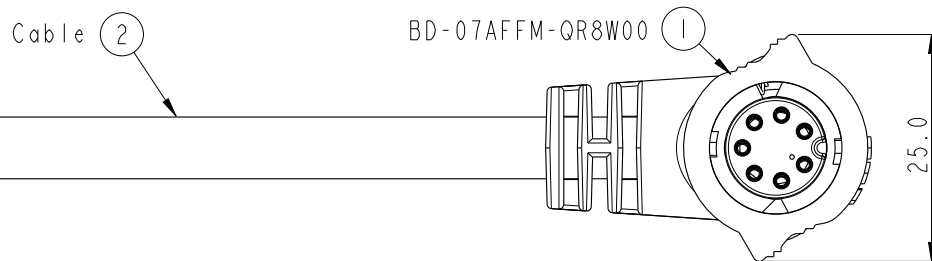



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720241	2017-02-15	Frank Deng	Change dimension from 34.0 to 34.7

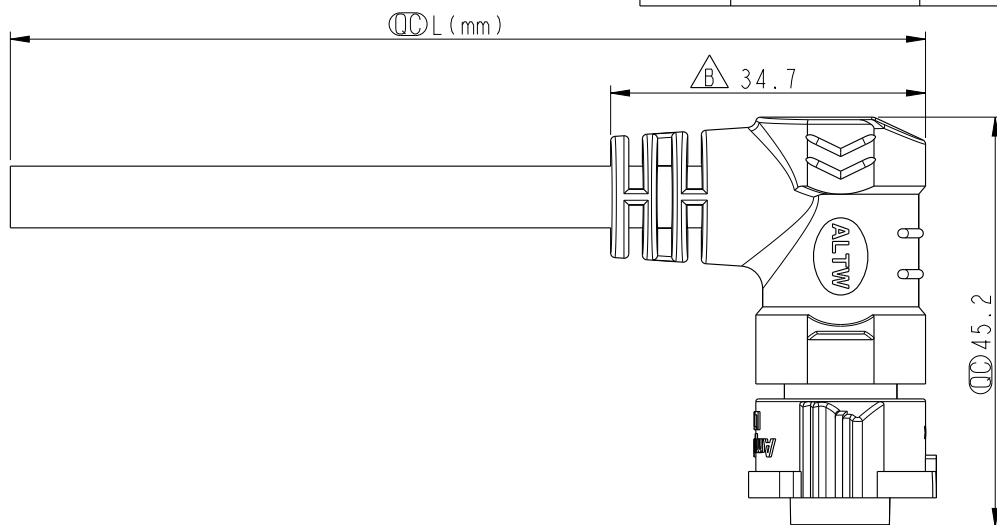

Pin Assignments
Front View

7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

BD-07AFFM-QR8DXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP68(Mated)
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 5A
- * Flame Class: UL94V-0 (UV Resistance)
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Rubber: Silicon, Gray
- * Cable: UL21388 20AWG*7C+AL+My
PVC Jacket UV Resistant, OD=6.8, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		
TOLERANCE .X	±0.5	

TITLE X-Lok B-Size Molding F Conn F 7 Pin			
SCALE 6:5	SIZE A4	SHEET 1	OF 1
REV. B	WC-REV. A.1	$\varnothing$: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Frank Deng	DATE 2017-02-15
DWG NO BD-07AFFM-QR8DXX	CHECKED BY Spring Liu	DATE 2017-02-15
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2017-02-15