

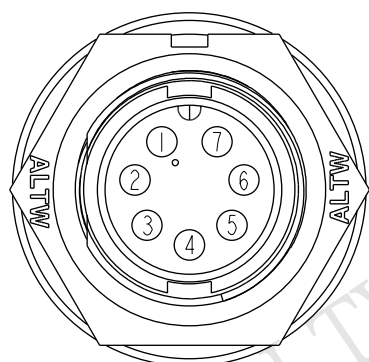



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0391~394	2008/09/19	Shin	Add Note
C	LEN15A0206~209	2015/09/25	Vicky	Update Logo & Note
D	LEN1650404~407	2016/05/13	Ruru	Modify Logo Position

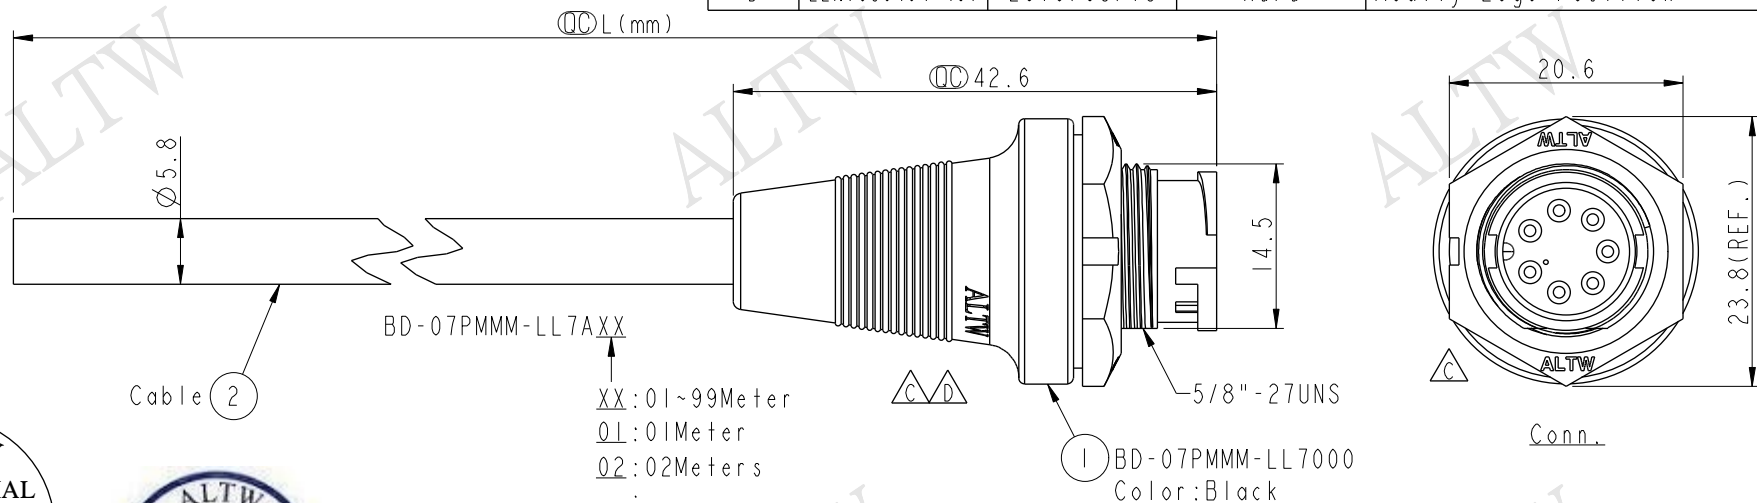

7	White	白
6	Green	綠
5	Brown	棕
4	Red	紅
3	Yellow	黃
2	Orange	橙
1	Blue	藍
Conn.	Wire Color	
Pin Out		

Note:

- *  Important Dimensions To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24#*7C+D+Al/My,UV, PVC Jacket, Black, OD=5.8mm
- *  Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
- *  Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
- *  Cable Length Tolerance: 1M:±40mm
2M~5M:±60mm
6M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT: mm		
TOLERANCE		
$\pm 0.5 \text{ mm}$		

TITLE		Standard	
Cable Lock 7Pin M Conn M Pin			
SCALE	3:2	SIZE	A4
REV.	D	SHEET	1 OF 1
WC-REV.	A.1	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016-05-13
DWG NO	CHECKED BY	DATE
BD-07PMMM-LL7AXX	Rita	2016-05-13
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016-05-13