


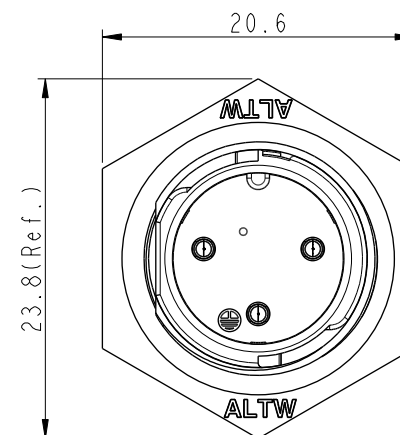
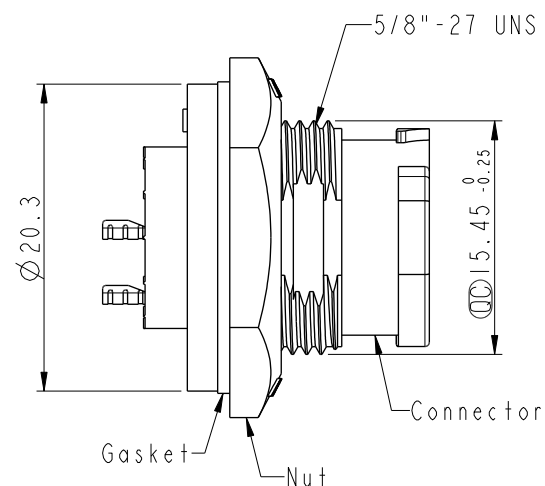
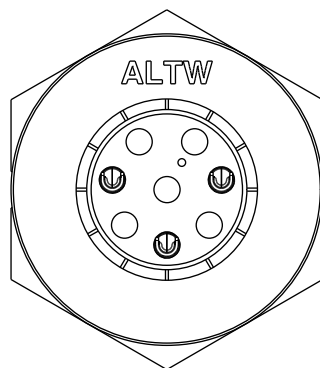
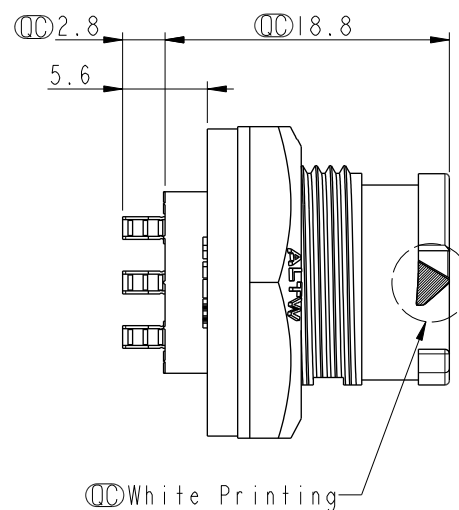







REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/18	Vicky	Change Note
C	C220466	2022/04/14	Ruru	 X4



Recommended
Panel Cut-out

 BD-XXPMMS-QC800P
XX: No. Of Pin

Ground Pin
3PPin Assignment
Front ViewNote:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 4.0mm
- * Gasket and nut are packed separately
in pe bag

UNIT:mm		
TOLERANCE		
.X	± 0.25 mm	

TITLE XLOK, B-5A, FRONT FASTENED M, M, SOLDER, PUSH LOCK 			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.3	 : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Vicky	DATE 2019-03-18
DWG NO. BD-XXPMMS-QC800P 	CHECKED BY Rita	DATE 2019-03-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-18