REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/18	Vicky	Change Note
C	C220466	2022/04/18	Ruru	△C X4



Recommended
Panel Cut-out

△C
BD-XXRMMS-QC800P
XX: No. Of Pin

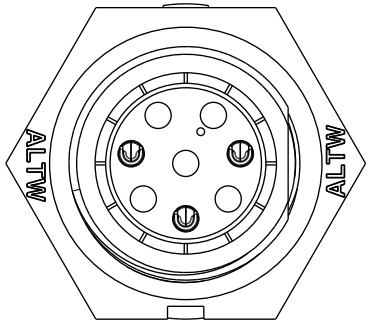

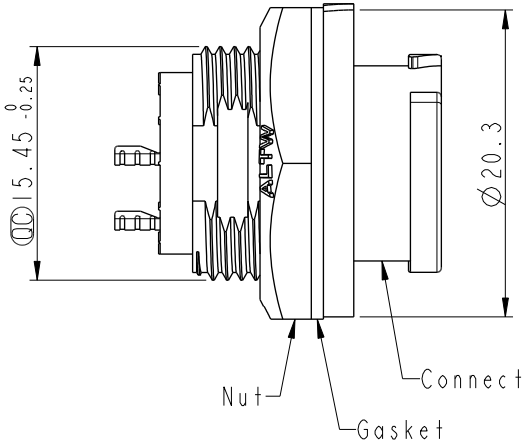

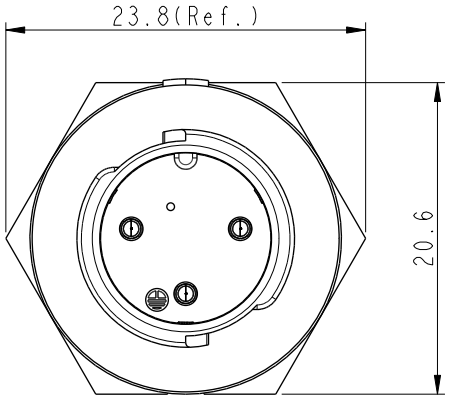

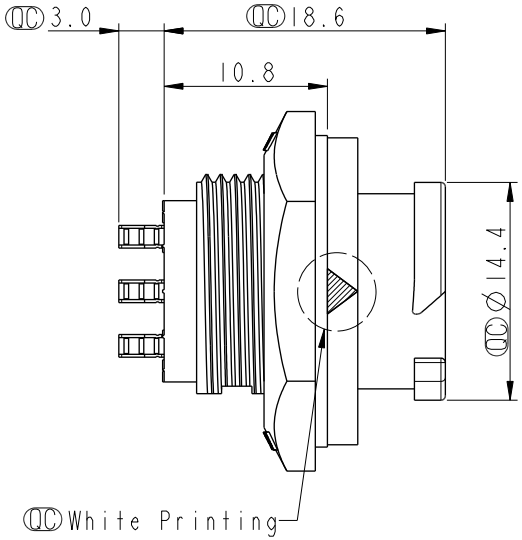



Ground Pin
3P

Pin Assignment
Front View

Note: B C
* RoHS Compliant
* (QC)Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* For panel thickness max: 4.5mm
* Gasket and nut are packed separately in pe bag

UNIT:mm

TOLERANCE
.X ± 0.25 mm

TITLE: XLOK, B-5A, REAR FASTENED M, M, SOLDER, PUSH LOCK △C

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1
REV. C | WC-REV. A.4 | (QC):Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Wes Fan	DATE: 2016-07-11
DWG NO: BD-XXRMMS-QC800P △C	CHECKED BY: Spring Liu	DATE: 2016-07-11
CUSTOMER: ALTW	APPROVED BY: Kevin Hu	DATE: 2016-07-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.