



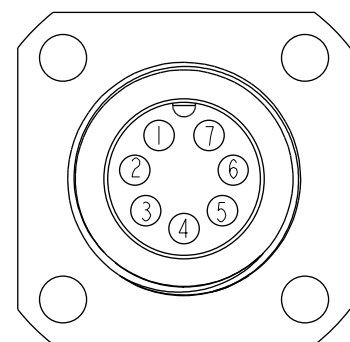
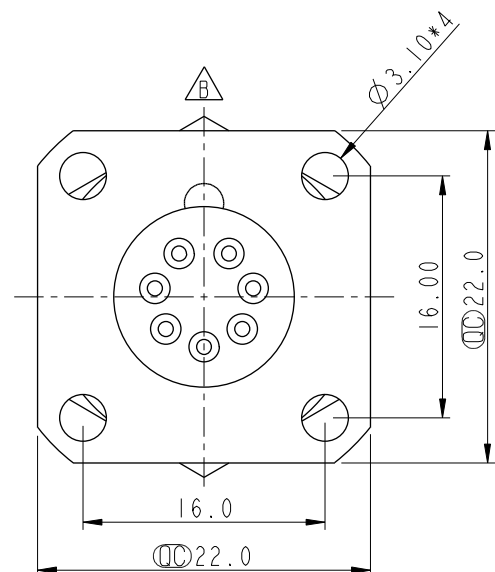


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390023	2013/08/28	Sam	Modify View
C	CI90269	2019/03/06	Ruru	Modify Note

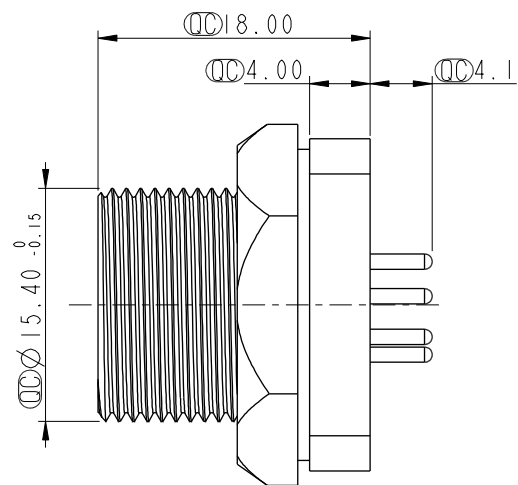


7 Pin Male Connector
Male Pin PCB Layout

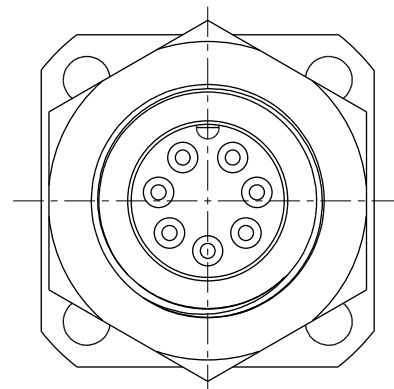

Pin Assignments
Front View

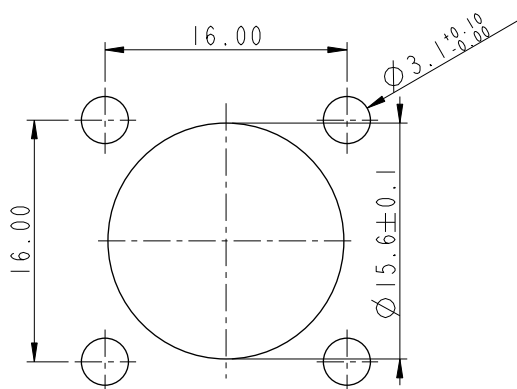

Recommended Panel Cut-Out

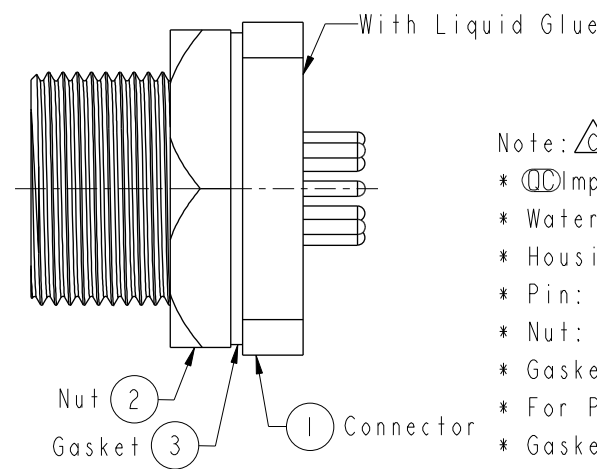

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Metal, Nickel Plated
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Metal, Nickel Plated
 - * Gasket: Rubber, Black
 - * For Panel Thickness Max Of 6.5mm.
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard Shielded		BSD-07PMMP-SS7001		Ruru		2019-03-06	
.XXX ±0.05		ANGLES ±1°		Panel Screw 7Pin M Conn M Pin		DWG NO		CHECKED BY		DATE	
				SCALE 2:1		BSD-07PMMP-SS7001		Rita		2019-03-06	
				REV. C		CUSTOMER		APPROVED BY		DATE	
				WC-REV. B.2		ALTW		Max		2019-03-06	
				QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司