


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1580276~78	2015/08/12	Lu Di	Change To Common Drawing
C	LEN1680343 LEN1680348~49	2016/08/06	Mafei	Updated The Pin Out Color.
D	LE31740031~33	2017/03/27	Mafei	Updated The Connector.

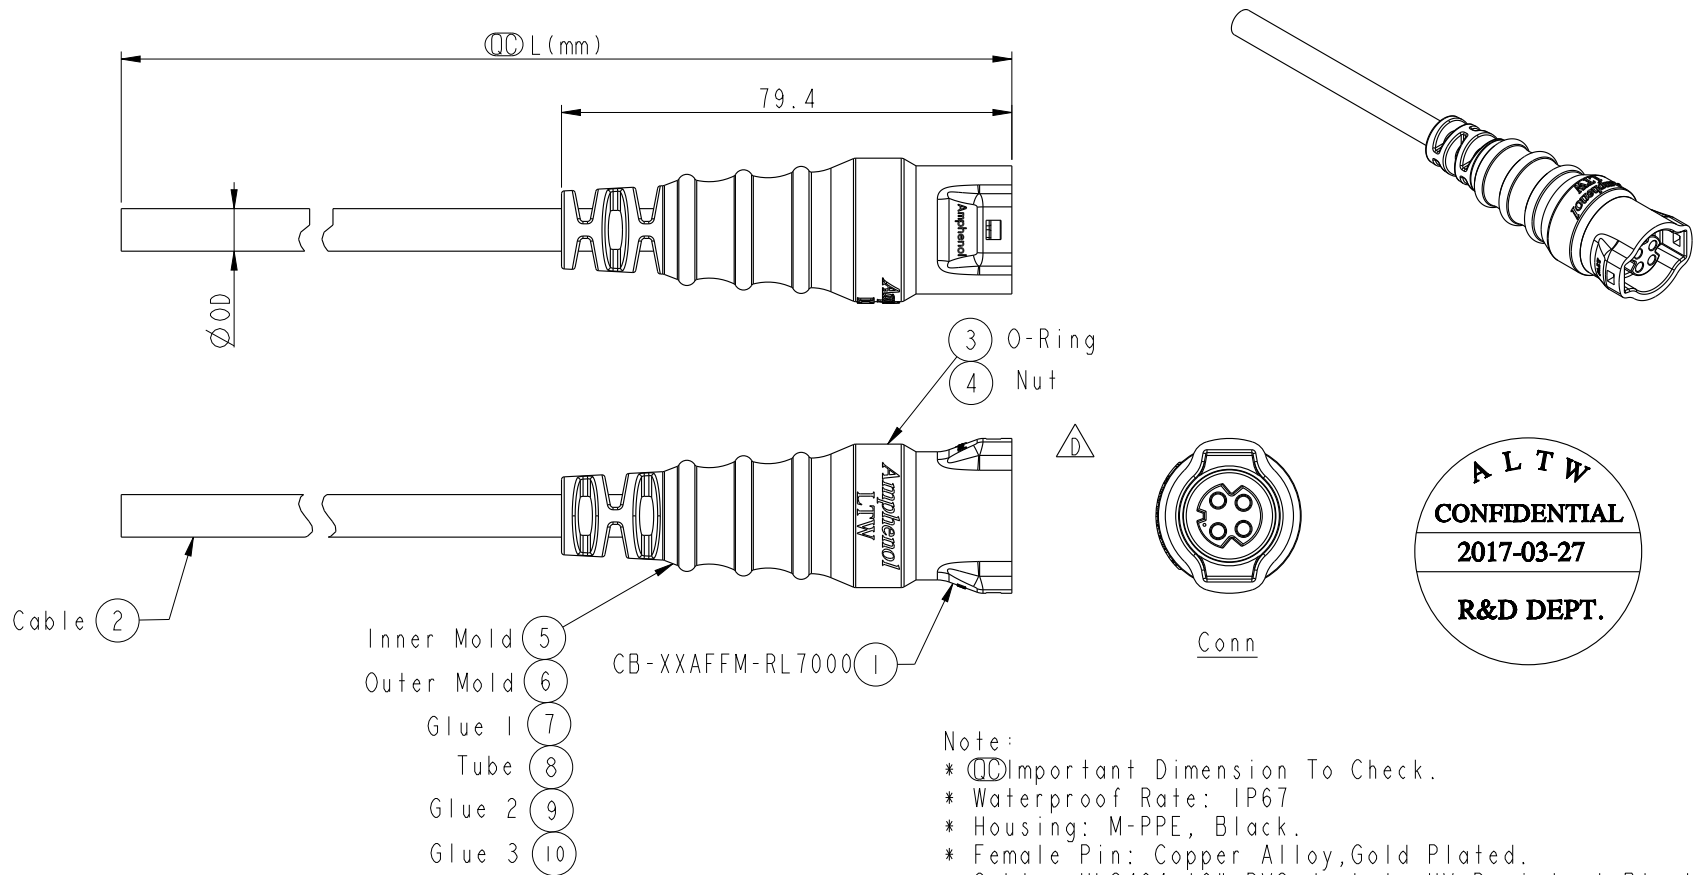

Note:

- *  Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: M-PPE, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 16#, PVC Jacket, UV Resistant, Black.
- * Cable Length Tolerance: 01M: $\pm 40\text{mm}$
02M~05M: $\pm 60\text{mm}$
06M~10M: $\pm 100\text{mm}$
11M~30M: $\pm 200\text{mm}$
31M~99M: $\pm 500\text{mm}$
- * Prohibiting the use of place in oils

CB-02AFFM-RL7AXX	Ø 7.8
CB-03AFFM-RL7AXX	Ø 7.5
CB-04AFFM-RL7AXX	Ø 7.5
Part No.	Cable OD

UNIT: mm		TITLE MIDDLE CABLE RBL F CONN F PIN		
TOLERANCE	± 0.5	SCALE 3:4	SIZE A4	SHEET 1 OF 2
		REV. D	WC-REV. A.3	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Mafei	2017-03-27
DWG NO	CHECKED BY	DATE
CB-XXAFFM-RL7AXX	Jerry	2017-03-27
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017-03-27

ALTW
CONFIDENTIAL
2017-03-27
R&D DEPT.