




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

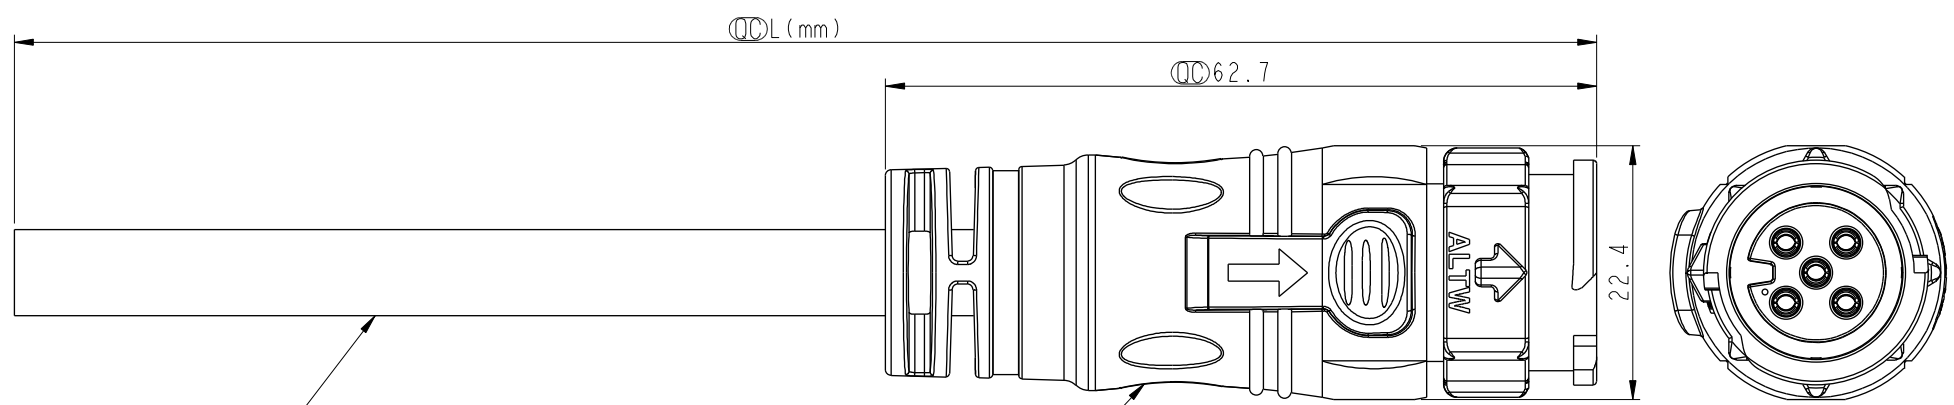

Pin Assignments
Front View

5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

CB-05AMFM-QL8DXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
:
99 : 99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Working Voltage Rating: AC 300 V
 - * Working Current Rating: 10A
 - * Flame Class: UL94V-0 (UV Resistance)
 - * Waterproof Rate: IP68(Mated).
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL21388 16AWG*5C+AL.Mylar Black,PVC Jacket UV Resistant, OD=7.6
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm				TITLE X Lok C-Size Cable 5Pin 10A M Conn. F Pin SCALE 3:2 SIZE A4 SHEET 1 OF 1 REV. A WC-REV. A.2  QC:Inspection item Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO		DRAWN BY		DATE			
TOLERANCE ±0.5		DWG NO CB-05AMFM-QL8DXX						CHECKED BY Spring		DATE 2014-11-18					
		CUSTOMER ALTW						APPROVED BY Kevin		DATE 2014-11-18					
1		2						3		4		5		6	
FWI 0702-01-02A1															