





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200960	2020/06/23	Ruru	$\triangle B$ X4

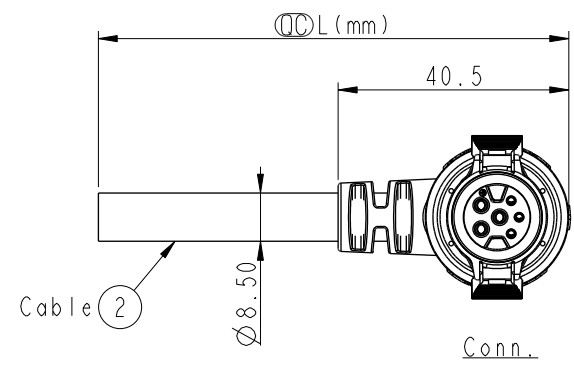

$\triangle B$ CBD-XXAMFM-RR8FXX
XX: No. Of Pin(Pin數)
XX: 01~99Meter
01: 01Meter
02: 02Meter
.....
99: 99Meter
Cable Length(L): 01~99Meters

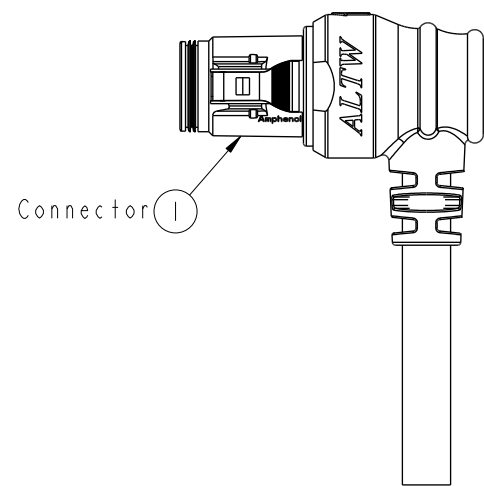

- $\triangle B$ Note:
- * ϕ Important Dimension To Check
 - * Waterproof Rate: IP68
 - * Housing: Thermoplastic, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Gasket: Rubber, Gray
 - * Cable: UL21996 3C*16AWG+(20#*IP+D+AL)+F+AL/MY PVC Jacket, OD=8.5, Black
 - * Cable Length Tolerance: >0.3M~1.5M: +50/-0mm
>1.5M~3M: +100/-0mm
>3M~5M: +150/-0mm
>5M~10M: ±100mm
>10M~20M: ±200mm
>20M~30M: ±300mm
>30M~100M: ±500mm
 - * Prohibiting the use of place in oils



6	Drain (20AWG)	地線
5	White (20AWG)	白
4	Green (20AWG)	綠
3	Blue (16AWG)	藍
2	Red (16AWG)	紅
1	Black (16AWG)	黑
Conn.	Wire Color	
Twist		

Conn.
Pin Assignments
Front View

UNIT:mm		TOLERANCE		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
±0.5				RBL, C-10A+5A, 06P, CABLE W/SR M, F, MOLDING, RBL		安費諾亮泰企業股份有限公司		DWG NO		Peng		2019-04-30	
				SCALE				CBD-XXAMFM-RR8FXX		CHECKED BY		DATE	
				3:4		A4				Mafei		2019-04-30	
				REV.		WC-REV.		CUSTOMER		APPROVED BY		DATE	
				B		.0		ALTW		Jerry		2019-04-30	
						ϕ Inspection item							