


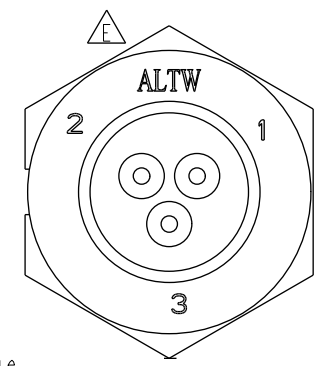
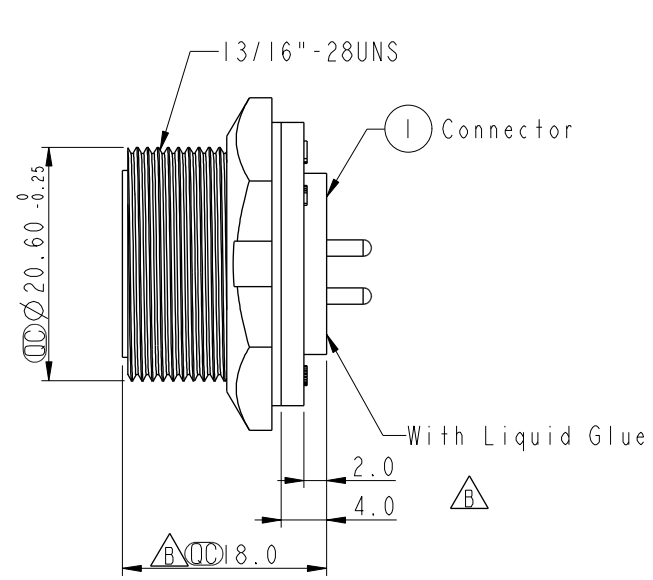
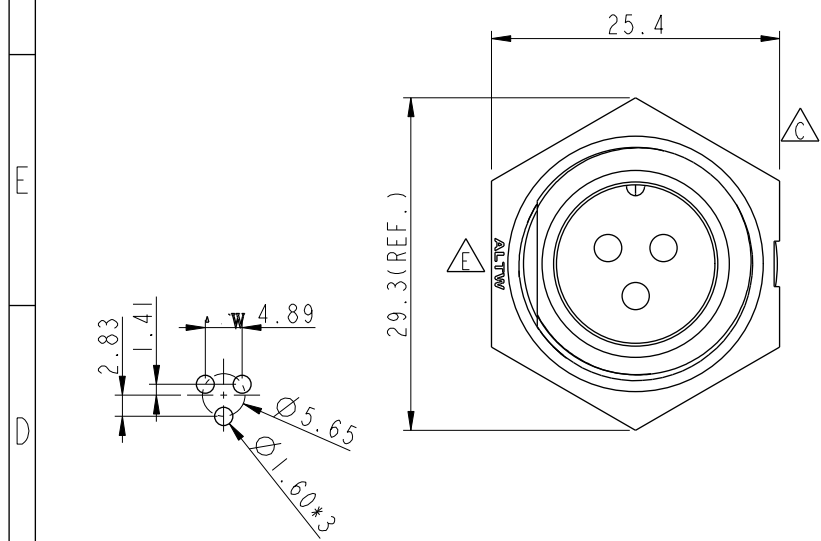


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8A0002	2008/09/26	Li Xiu Zhi	Change View
D	LEN-8B0116	2008/11/04	Shin	Add Note
E	CI90271	2019/02/27	Ruru	Modify Note & Change Logo

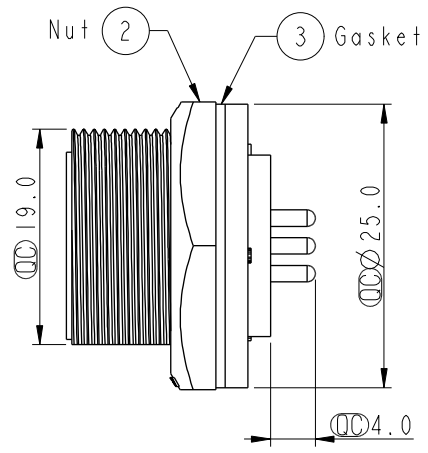

3Pin Male Connector
Female Pin PCB Layout

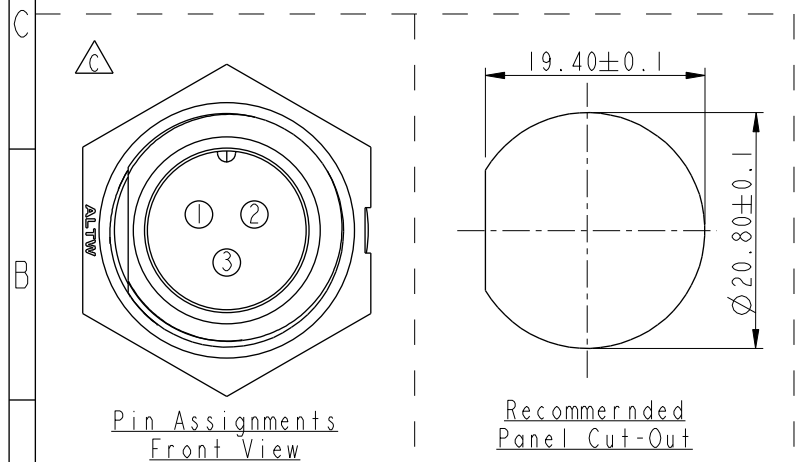

- Note:
- * Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.0mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Middle Panel Screw		CC-03PMMP-SC7001		Ruru		2019-02-27	
.XXX ±0.05		ANGLES ±1°		3P M Conn M Pin		DWG NO		CHECKED BY		DATE	
				SCALE 1:1		CC-03PMMP-SC7001		Rita		2019-02-27	
				REV. E		CUSTOMER		APPROVED BY		DATE	
				SIZE A4		ALTW		Max		2019-02-27	
				WC-REV. A.3							
				SHEET 1 OF 1							
				QC: Inspection item							

Amphenol LTW

安費諾亮泰企業股份有限公司

W10814-03-0001A2