
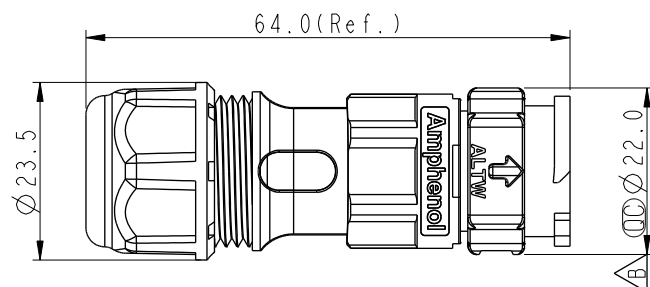

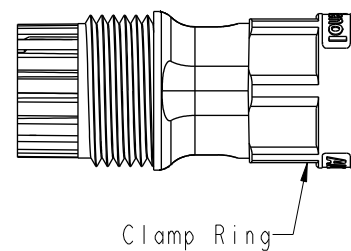




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2018/03/14	Mafei	Change Rev.01 To Rev.A
B	E191814	2019/10/23	Ruru	 X3
C	C220464	2022/04/07	Ruru	 X4

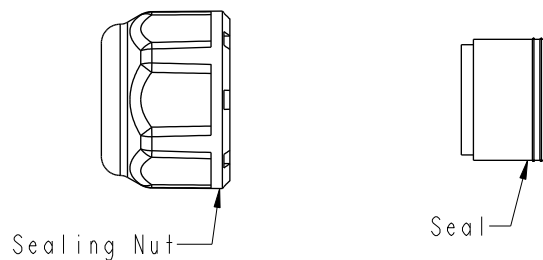


XX: No. Of Pin

CC-XXBMMB-QL8XPP

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

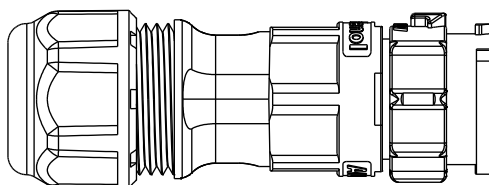Pin
Assignments
Front View

2 Pin



3 Pin

Note:  


- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Silver Plated
 - O-Ring: Rubber, Dark Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

UNIT:mm			TITLE	XLOK, C-20A, CABLE W/O SR M, M, FI SCREW IN, PUSH LOCK		
TOLERANCE	±0.5 mm		SCALE	8:5	SIZE	A4
			REV.	C	WC-REV.	A.3
					SHEET	1 OF 2
					QC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Mafei	2018-03-14
CC-XXBMMB-QL8XPP	Jerry	2018-03-14
ALTW	Max	2018-03-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

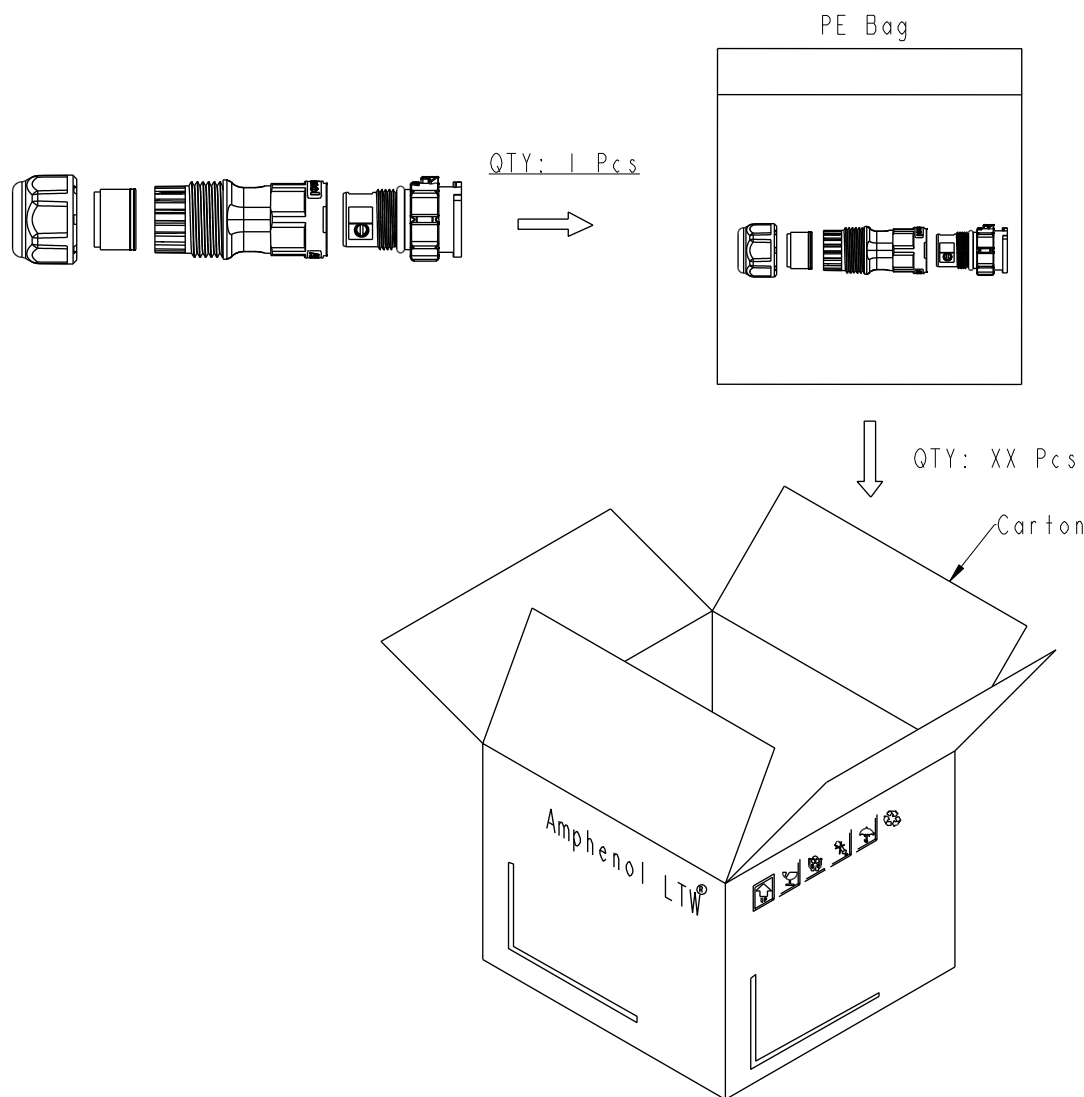

Note:
* One Set Unassembled In One PE Bag.
(每一組未組裝, 放置於一個PE袋, 並封口, 如圖示)
* Label is Attached To PE Bag Front.
(標籤貼在PE袋正面)

UNIT:mm		TOLERANCE ±0.5 mm		TITLE XLOK, C-20A, CABLE W/O SR M, M, FI SCREW IN, PUSH LOCK	
SCALE 8:5		SIZE A4		SHEET 2 OF 2	
REV. C		WC-REV. A.3		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY Mafei		DATE 2018-03-14	
DWG NO CC-XXBMMB-QL8XPP		CHECKED BY Jerry		DATE 2018-03-14	
CUSTOMER ALTW		APPROVED BY Max		DATE 2018-03-14	