

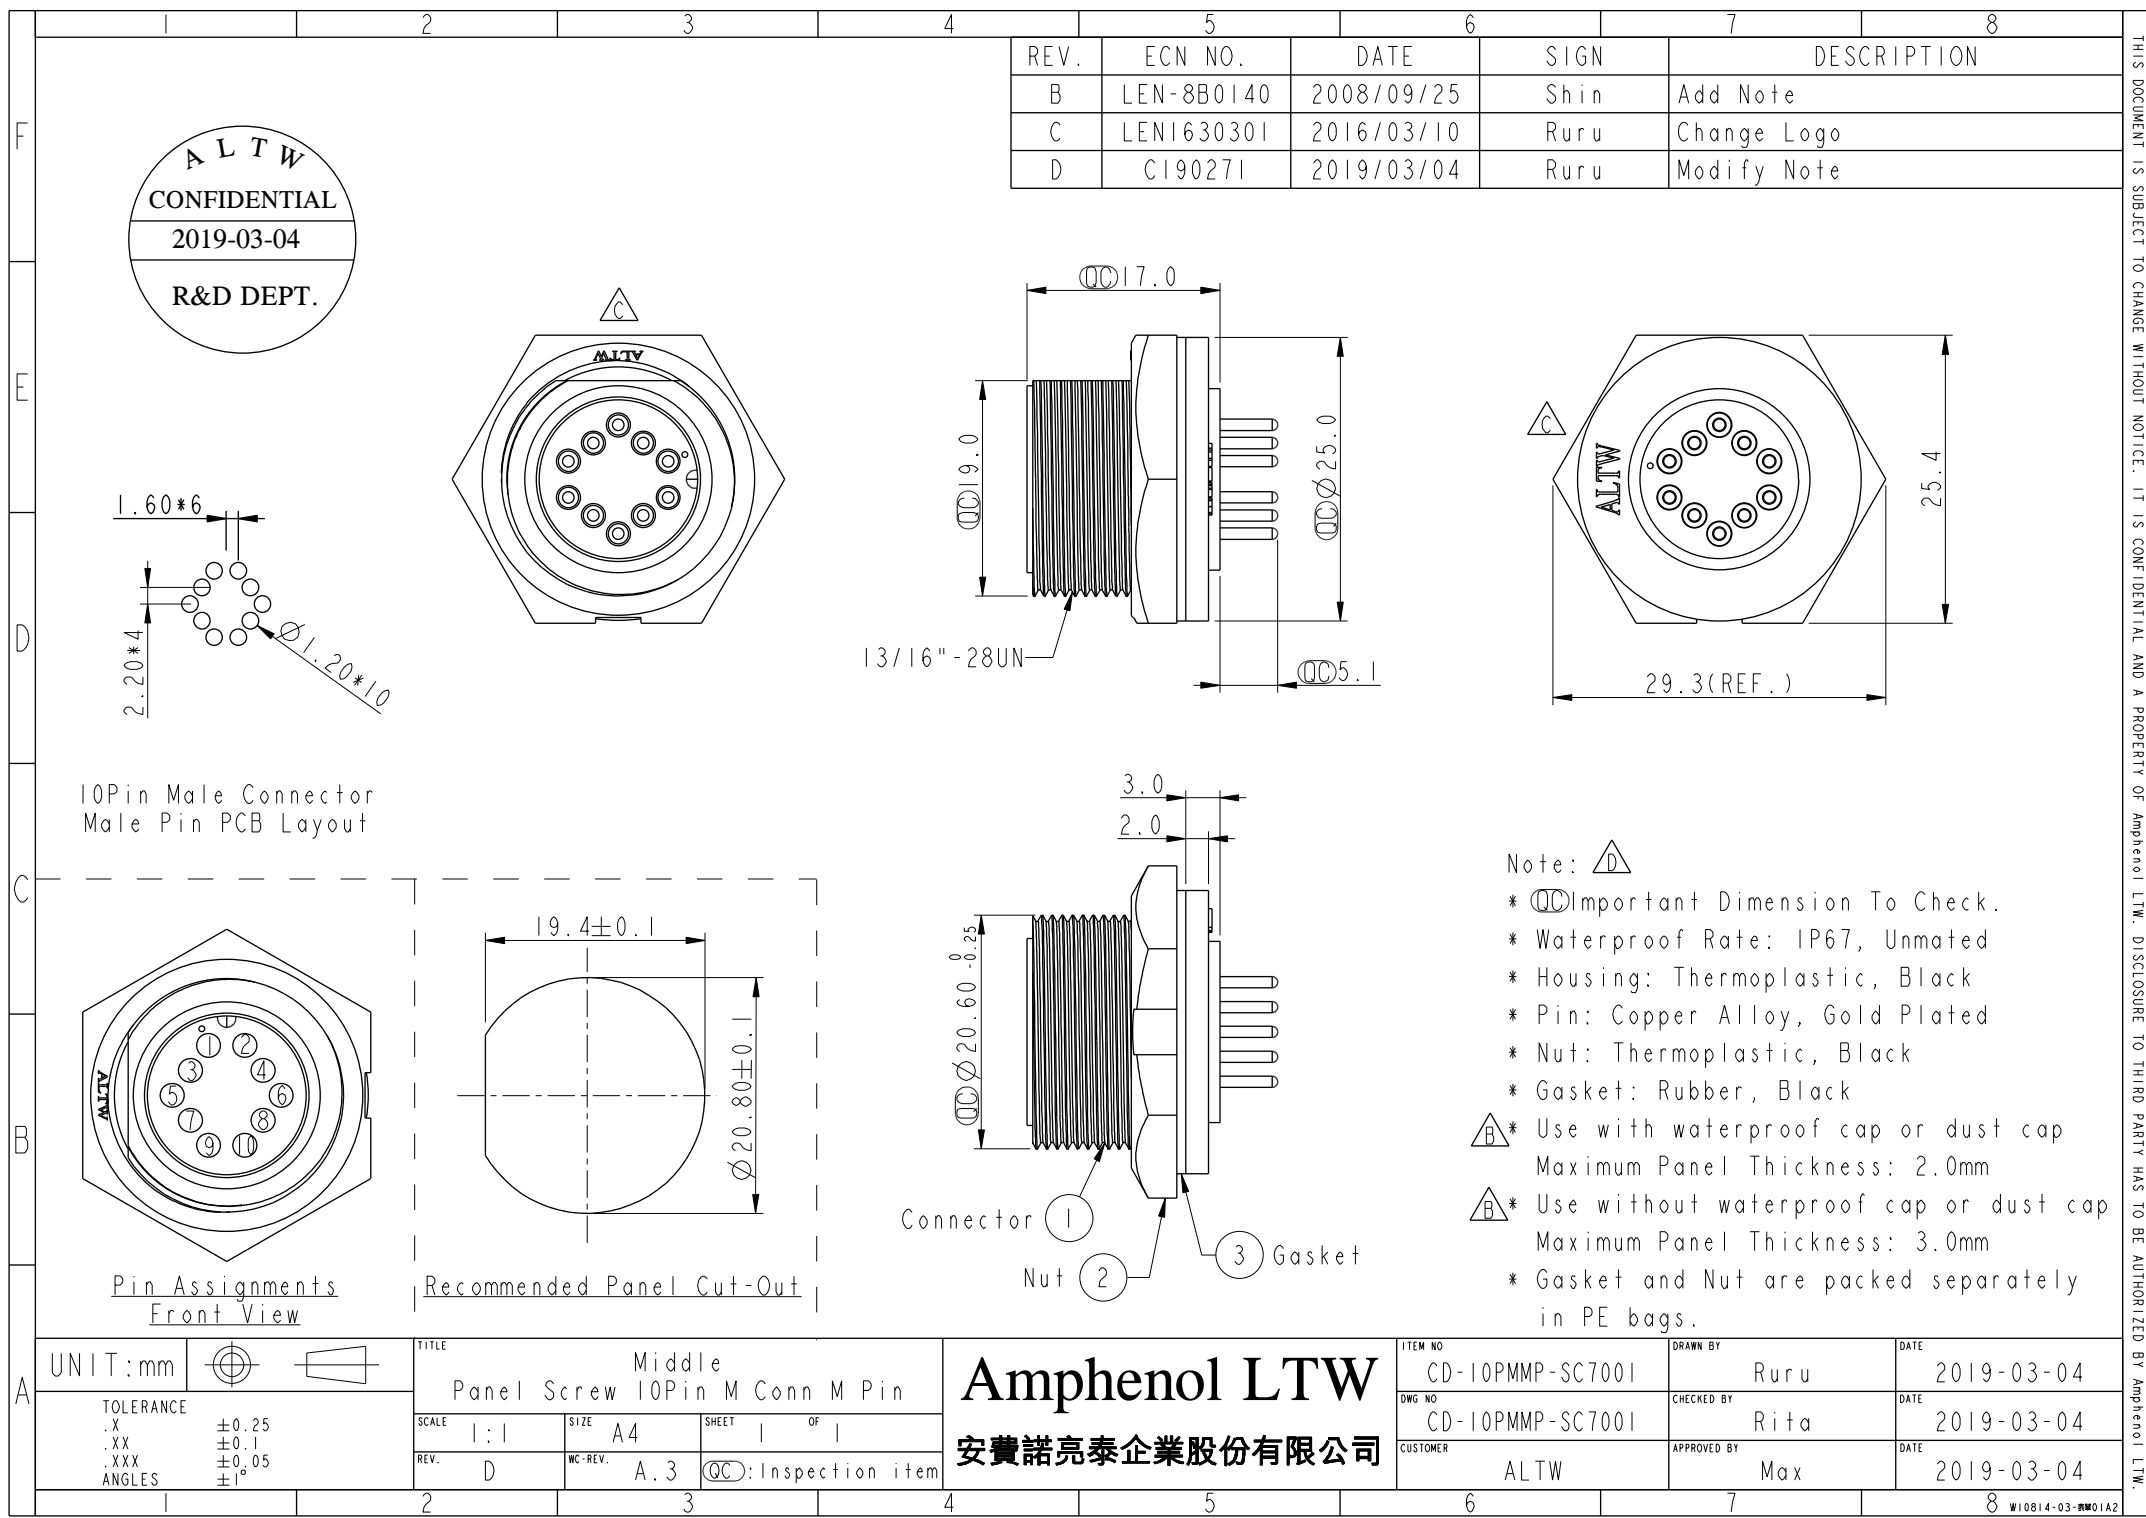
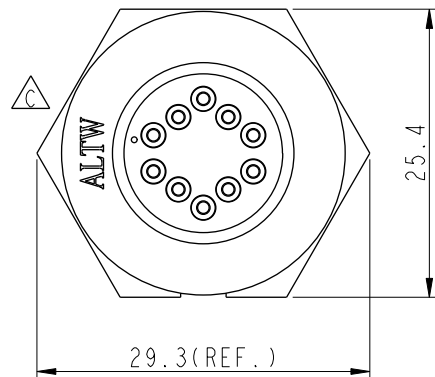


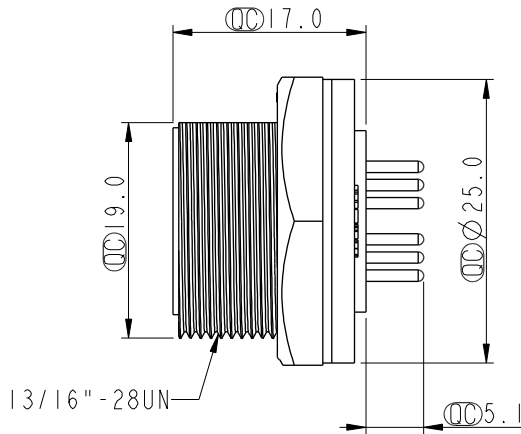


ALTW
CONFIDENTIAL
2019-03-04
R&D DEPT.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0140	2008/09/25	Shin	Add Note
C	LEN1630301	2016/03/10	Ruru	Change Logo
D	CI90271	2019/03/04	Ruru	Modify Note




10Pin Male Connector
Male Pin PCB Layout



Pin Assignments
Front View



Recommended Panel Cut-Out

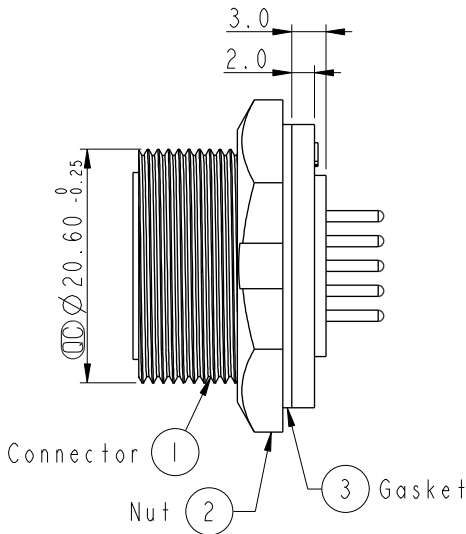

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.0mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Middle Panel Screw 10Pin M Conn M Pin			
TOLERANCE		SCALE	SIZE	SHEET	OF
.X	±0.25	1:1	A4	1	1
.XX	±0.1	REV.	WC-REV.	QC:Inspection item	
.XXX	±0.05	D	A.3		
ANGLES	±1°				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	CD-10PMMP-SC7001	DRAWN BY	Ruru	DATE	2019-03-04
DWG NO	CD-10PMMP-SC7001	CHECKED BY	Rita	DATE	2019-03-04
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-04

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.