
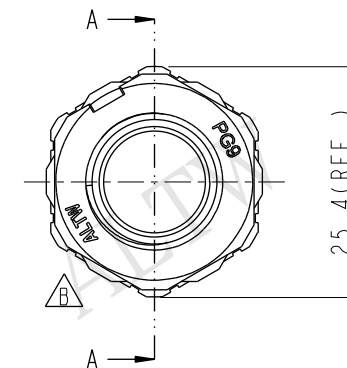

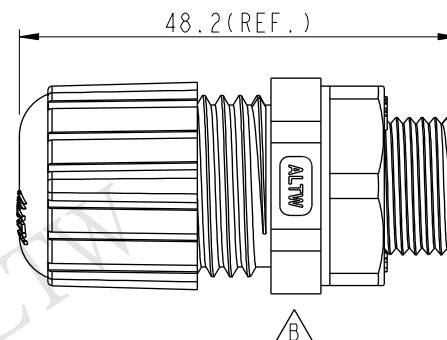
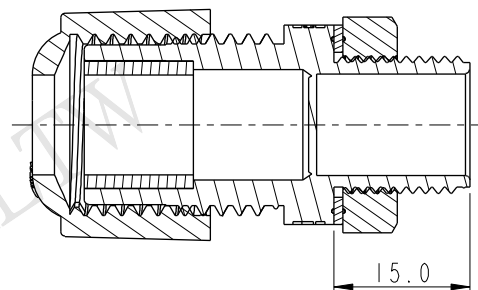
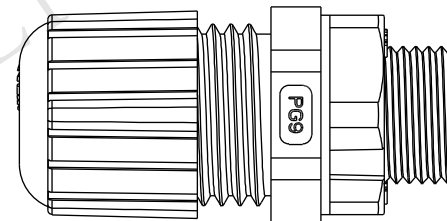


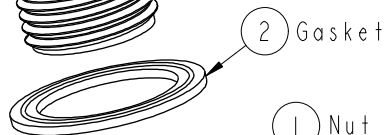
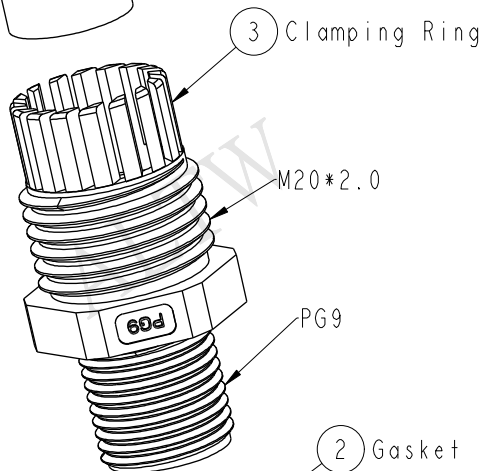



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1570030	2015/05/12	Ruru	Change Logo

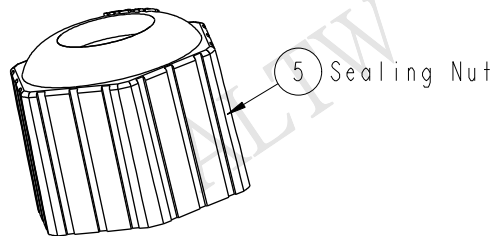

Note:

- * Waterproof Rate: IP68
- * Screw Nut: Nylon, Gray
- * Clamp Ring: Nylon, Gray
- * Sealing Nut: Nylon, Gray
- * Gasket: EPDM, Black
- * Seals: EPDM, Black
- * Cable Range: $\varnothing 6.0 \sim \varnothing 10.0 \text{mm}$
- * For Panel Thickness: 7.5mm max
- * Spanner Size:
Body: 22.0mm
Sealing Nut: 22.9mm
Screw Nut: 22.0mm

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		PG9 Gland,Knock Hole		CSG-09G005		Ruru		2015-05-12	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X		1:1		CSG-09G005		Rita		2015-05-12	
.XX		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX		A4		ALTW		Lion		2015-05-12	
ANGLES		REV.							
		B							
		WC-REV.							
		A.1							
		QC:Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.