

7



1000



A technical diagram showing a side view of a spring clip. The clip consists of a series of vertical, rounded, ribbed segments. A curved arm is attached to the left side of the clip, and a small arrow points to the top of this arm. The clip is shown in a cross-sectioned view, with a vertical line indicating the center of the clip.


3 Screw

10-Ring

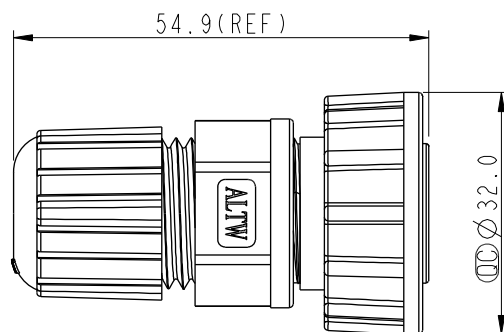

Pin Assignments

Front View



Note:

- *  Importation Dimension
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Liquid Glue: Clear
- * Screw: Stainless Steel
- * O-Ring: EPDM, , Black
- * Screw Nut: Nylon+GF, Black
- * Gasket: Silicone, Black
- * Clamping Ring: Nylon, Black
- * Seals: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Seal For Cable OD: $\varnothing$ 5.5mm~10.8mm
- * One Set Unassembled In One PE Bag
- * Application AWG:14~16AWG

UNIT:mm				TITLE Large Assy Screw 2Pin F Conn M Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DC-02BFMB-SL7001		DRAWN BY Vicky		DATE 2017-04-20				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 1:1		SIZE A4			SHEET 1 OF 1		DWG NO DC-02BFMB-SL7001		CHECKED BY Rita		DATE 2017-04-20		
				REV. C		WC-REV. A.2			QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2017-04-20		