
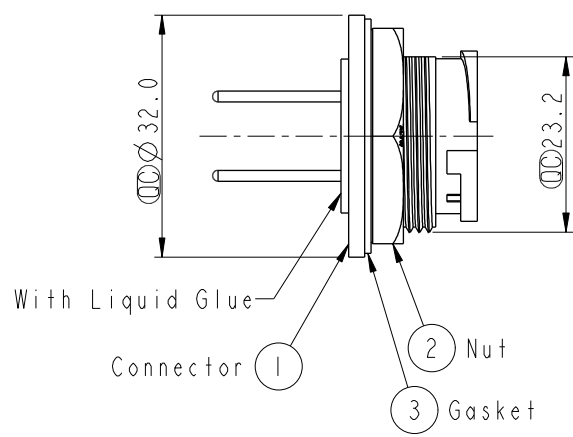
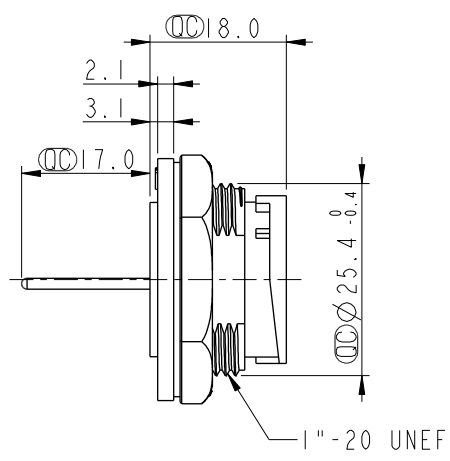
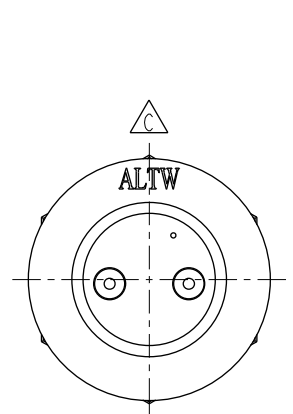
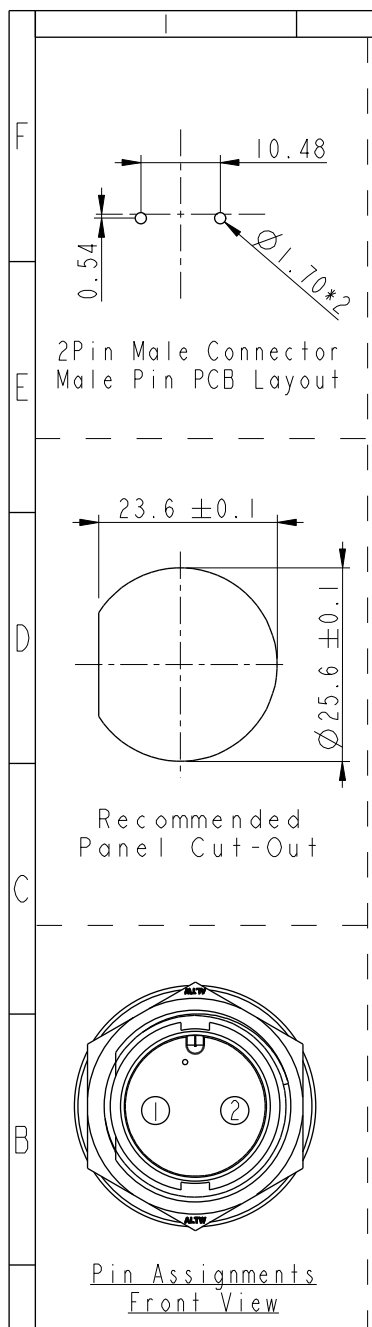


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0176	2008/09/15	Shin	Add Notes
C	LEN1740939	2017/04/10	Vicky	Update Logo
D	CI90310	2019/03/08	Ruru	Modify Note



- Note:
- * Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

A	UNIT:mm				TITLE Lock Type Connector For Panel Mount 2Pin Male Connector Male Pin(20A)		ITEM NO DC-02PMMP-LC7001		DRAWN BY Ruru		DATE 2019-03-08			
	TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1				SIZE A4		SHEET 1 OF 1		DWG NO DC-02PMMP-LC7001		CHECKED BY Rita	
			REV. D		WC-REV. A.3		(QC): Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-08	

Amphenol LTW

安費諾亮泰企業股份有限公司

12345678WI0814-03-0001A