



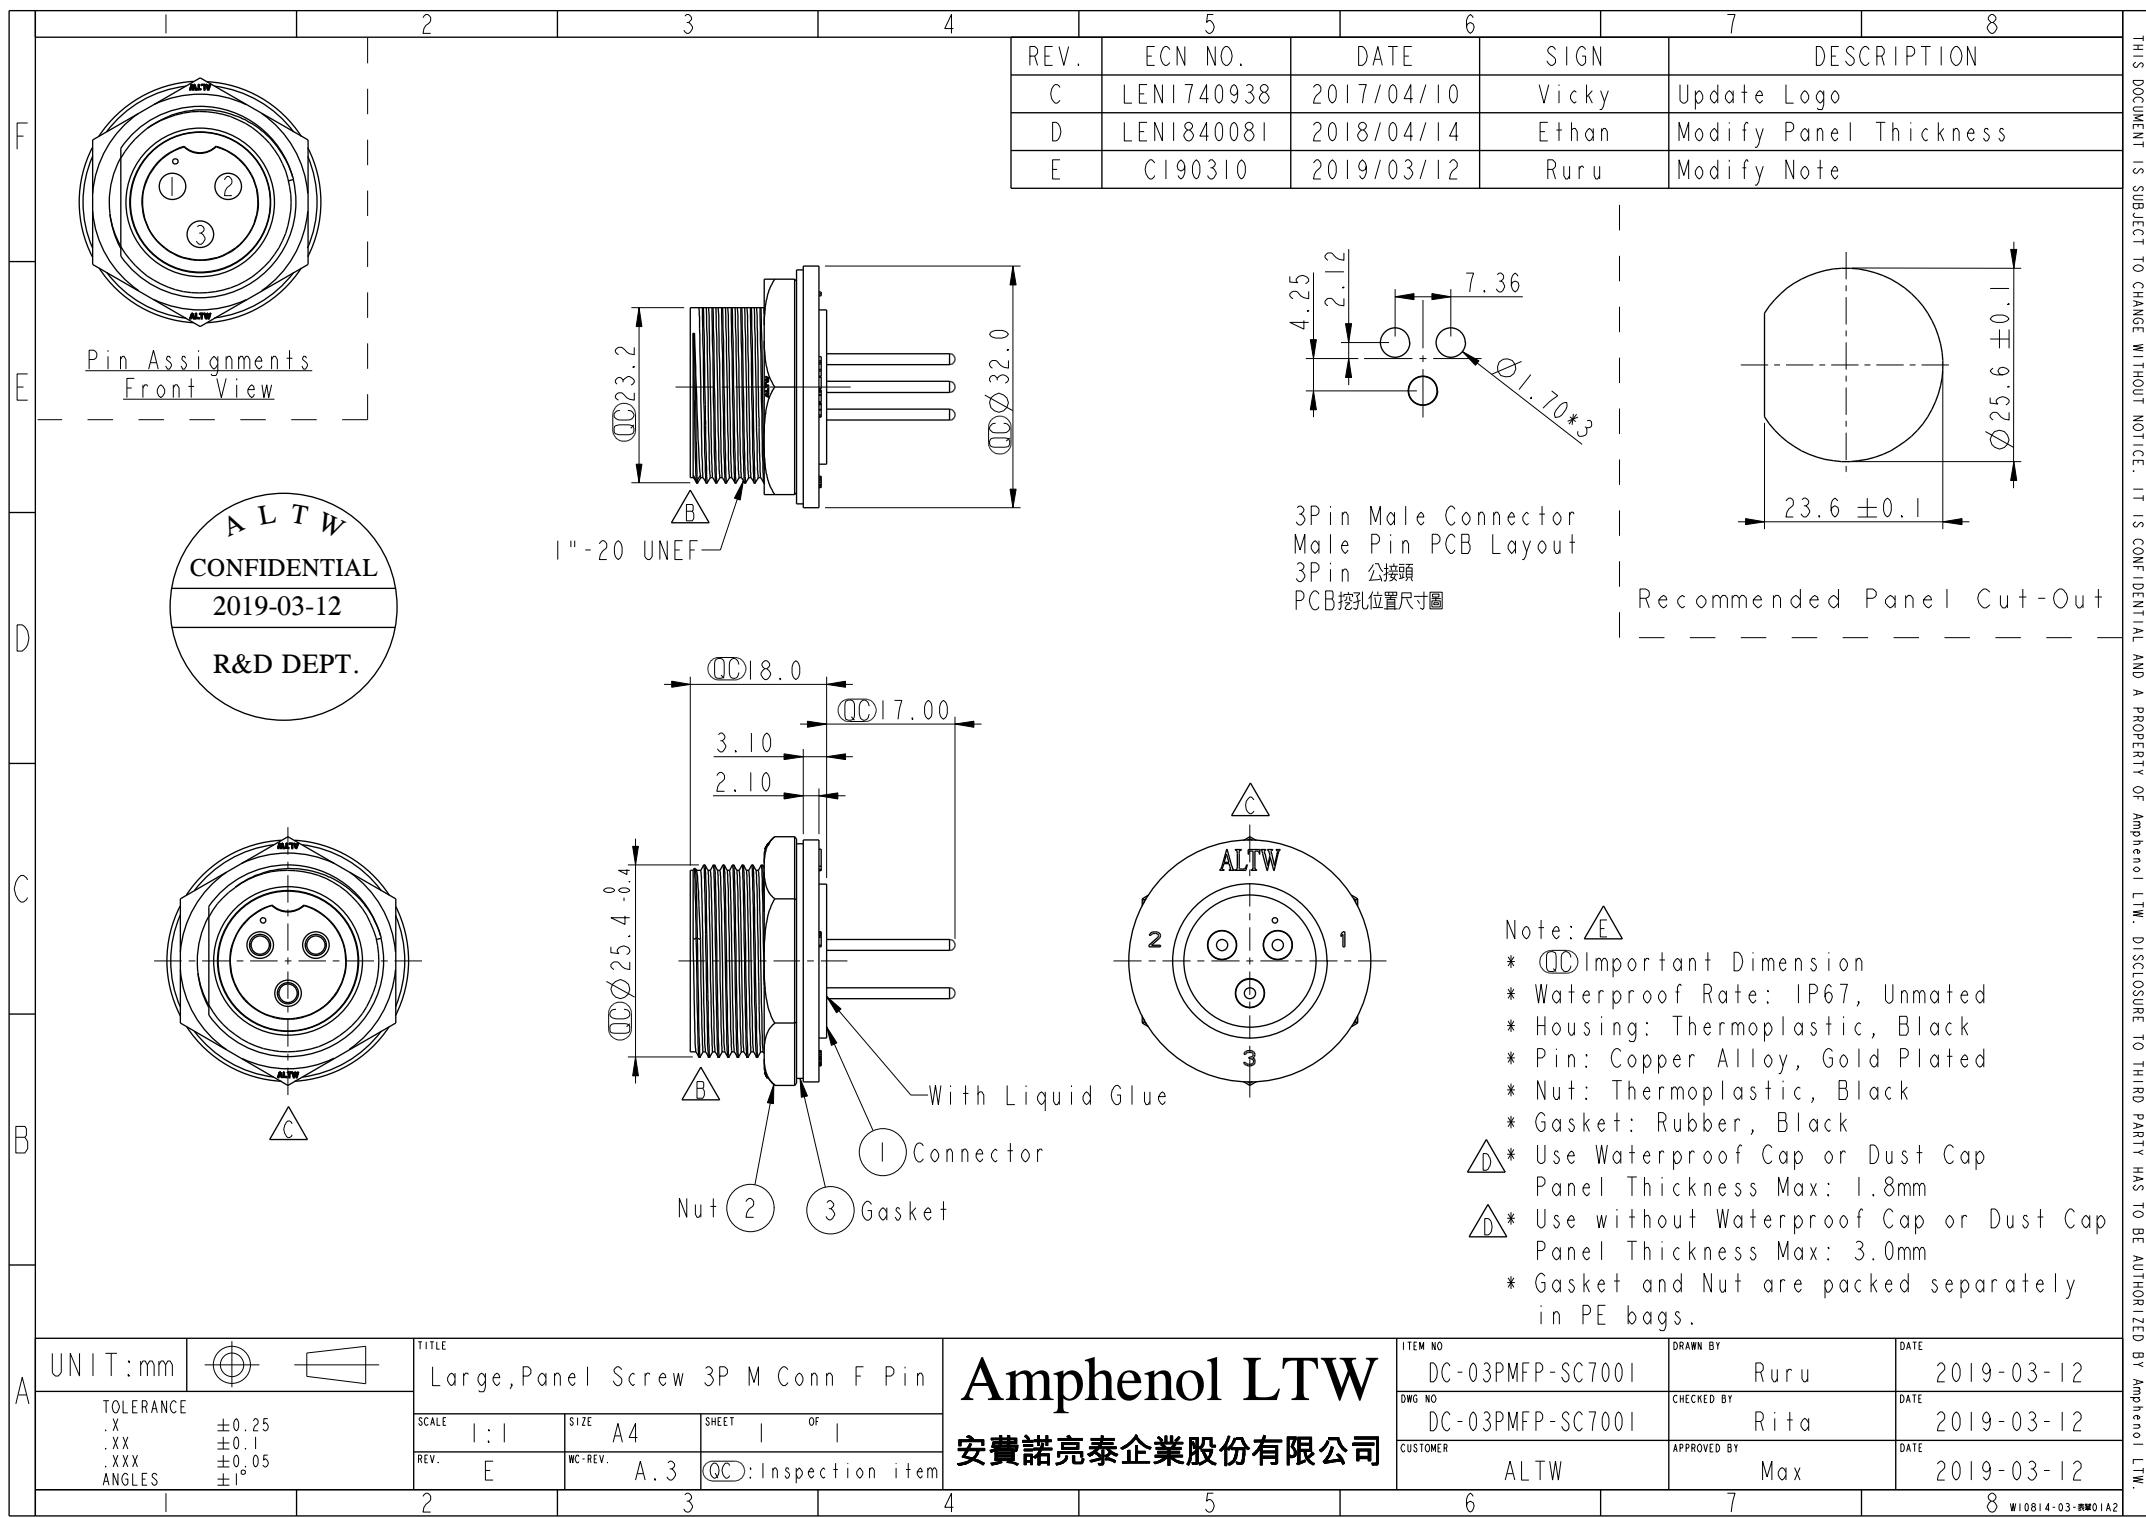


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1740938	2017/04/10	Vicky	Update Logo
D	LEN1840081	2018/04/14	Ethan	Modify Panel Thickness
E	CI90310	2019/03/12	Ruru	Modify Note

Pin Assignments
Front View

ALTW
CONFIDENTIAL
2019-03-12
R&D DEPT.



3Pin Male Connector
Male Pin PCB Layout
3Pin 公接頭
PCB挖孔位置尺寸圖



Recommended Panel Cut-Out

- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 -  * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
 -  * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT: mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
TOLERANCE		Large, Panel Screw 3P M Conn F Pin		安費諾亮泰企業股份有限公司		DC-03PMFP-SC7001	Ruru	2019-03-12
.X	±0.25	SCALE	1:1	SIZE	A4	DWG NO	CHECKED BY	DATE
.XX	±0.1	REV.	E	WC-REV.	A.3	DC-03PMFP-SC7001	Rita	2019-03-12
.XXX	±0.05	SHEET 1 OF 1		Inspection item		CUSTOMER	APPROVED BY	DATE
ANGLES	±1°					ALTW	Max	2019-03-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.