




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	E191899	2019/11/15	Ruru	 X4




Sealing Nut




Seal

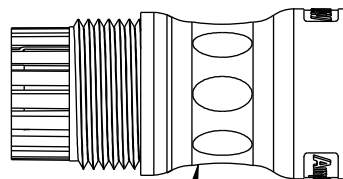

Clamp Ring





Connector

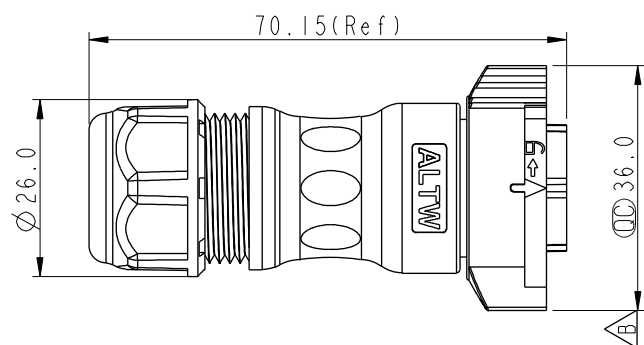

DC-XXBFFA-QL8XNP

02-2 Pin
03-3 Pin
05-5 Pin


S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

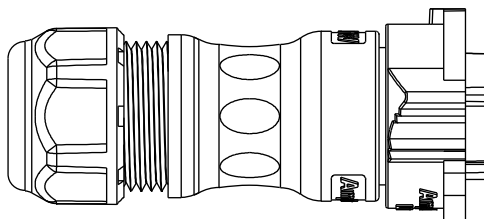Pin
Assignments
Front View

2 Pin



3 Pin



5 Pin

 Note:

- *  Important Dimension
- * Waterproof Rate: IP68, Mated
IP68 : 1M Depth Of Water In 24hours
- * Housing: Thermoplastic, Black
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

UNIT:mm			TITLE
TOLERANCE			XLOK, D-20A, CABLE W/O SR F, F, FI CRIMP, XLOK 
± 0.5 mm		SCALE	SIZE
		1:1	A4
REV.	B	WC-REV.	.0
		 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-11-15
DWG NO	CHECKED BY	DATE
DC-XXBFFA-QL8XNP 	Rita	2019-11-15
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-11-15